

SECRET

Approved For Release 2003/08/05 : CIA-RDP02T06408R000400010015-0

PIR



PHOTOGRAPHIC INTERPRETATION REPORT



ANALYSIS OF LUNA-9 PHOTOGRAPHY

NPIC/R-5022/66
JULY 1966

GROUP 1 EXCLUDED FROM
AUTOMATIC DOWNGRADING
AND DECLASSIFICATION

Declass Review
by NIMA/DOD

Approved For Release 2003/08/05 : CIA-RDP02T06408R000400010015-0

SECRET

25X1

25X1

Approved For Release 2003/08/05 : CIA-RDP02T06408R000400010015-0

WARNING

This document contains information affecting the national defense of the United States, within the meaning of Title 18, sections 793 and 794, of the U.S. Code, as amended. Its transmission or revelation of its contents to or receipt by an unauthorized person is prohibited by law.

Approved For Release 2003/08/05 : CIA-RDP02T06408R000400010015-0

SECRET

Approved For Release 2003/08/05 : CIA-RDP02T06408R000400010015-0

NPIC/R-5022/66

25X1

PHOTOGRAPHIC INTERPRETATION REPORT

ANALYSIS OF LUNA-9 PHOTOGRAPHY

JULY 1966

NATIONAL PHOTOGRAPHIC INTERPRETATION CENTER

Approved For Release 2003/08/05 : CIA-RDP02T06408R000400010015-0

SECRET

25X1

SECRET

NPIC/R-5022/66

Approved For Release 2003/08/05 : CIA-RDP02T06408R000400010015-0

25X1

INTRODUCTION

This report contains the results of an analysis of Luna-9 photography as requested in CIA/FMSAC requirement C-DS6-83,440. The object was to provide information about the facsimile photographic system, the spacecraft, and the lunar surface independent of previously published Soviet and U.S. data. The derived NPIC results corroborate the data published in the references at the end of this report. The agreement between the NPIC data and that data from the other sources validates the assumptions upon which the NPIC results are based. The primary working materials consisted of reproduced contact prints of the intercepted facsimile photographs of the moon, ground photography of a Luna-9 display at the Fair of Permanent Achievement, Moscow, and the Soviet motion picture T-6376.


- 1 -

Approved For Release 2003/08/05 : CIA-RDP02T06408R000400010015-0


SECRET

25X1

25X1




25X1

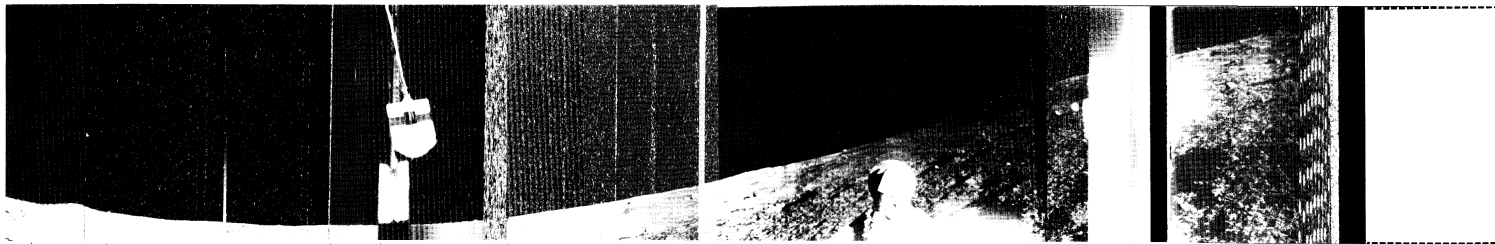

0154:00Z 0157:00Z 0204:00Z 0206:00Z 0210:00Z 0218:00Z 0228:00Z 0230:00Z 0233:00Z 0237:00Z

FIGURE 1. LUNAR PANORAMA, FIRST TRANSMISSION, 4 FEB 66

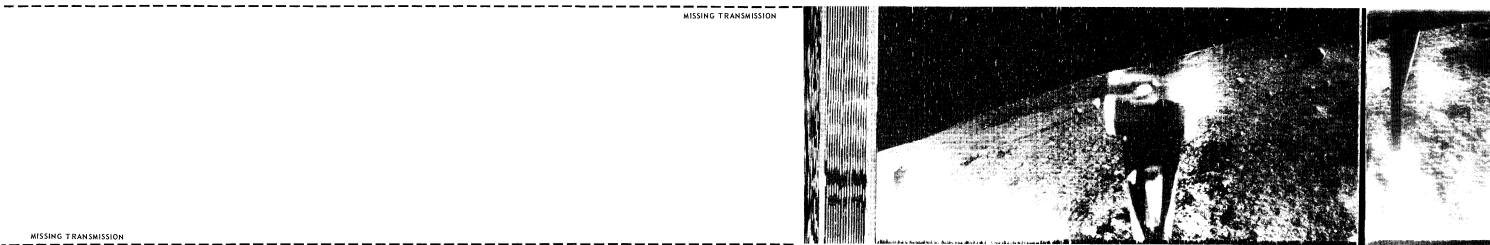

MISSING TRANSMISSION


MISSING TRANSMISSION

1535:00Z

1551:00Z 1558:00Z

25X1

25X1

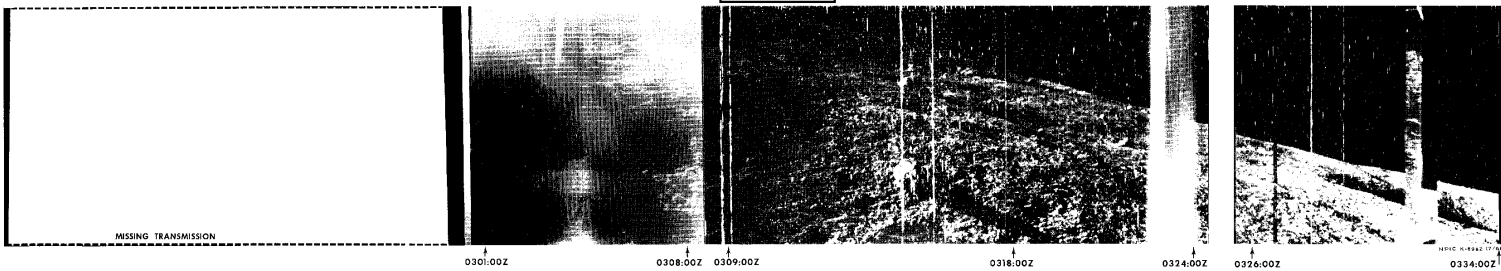

25X1



FIGURE 2. LUNAR PANORAMA, SECOND TRANSMISSION, 4 FEB 66.


25X1

SECRET

Approved For Release 2003/08/05 : CIA-RDP02T06408R000400010015-0

NPIC/R-5022/66

25X1

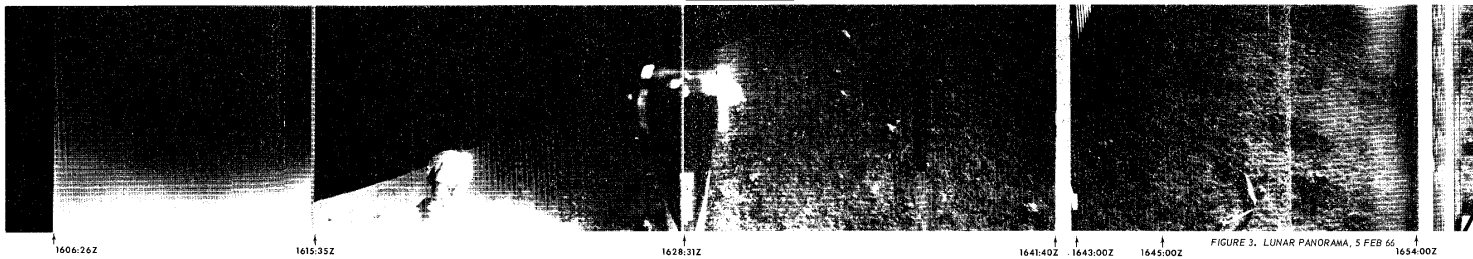

1606:26Z

1615:35Z

1628:31Z

1641:40Z

1643:00Z

1645:00Z

FIGURE 3. LUNAR PANORAMA, 5 FEB 66

1654:00Z

25X1



2131:06Z

- 4 -

SECRET

2155:00Z

2157:20Z

2208:00Z

Approved For Release 2003/08/05 : CIA-RDP02T06408R000400010015-0

25X1

25X1


SECRET

NPIC/R-5022/66

Approved For Release 2003/08/05 : CIA-RDP02T06408R000400010015-0

25X1

25X1

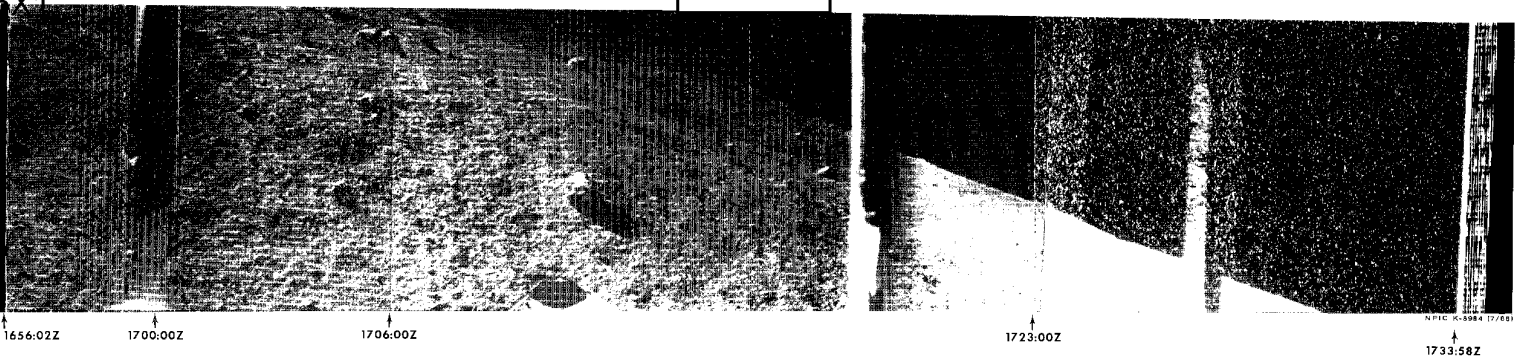

MISSING TRANSMISSION

MISSING TRANSMISSION

- 5 -

Approved For Release 2003/08/05 : CIA-RDP02T06408R000400010015-0

SECRET

25X1

GEOMETRIC ANALYSIS
1. Angular Fields of View

a. Azimuthal: Because the horizon image did not continuously appear on any one transmission (See Figures 1-4), the azimuthal angular field of view could not be determined by matching conjugate imagery. However, the available horizon image approximated a sine curve $y = C \sin \theta$ which is characteristic of the rotational motion of a rigid body on a flat surface. With an origin at the point of zero tilt (See Paragraph 2a), the constant (C) was computed from measurements of y values along the small axis of the format and angular values along the longer format dimension. The following sine curves were approximated assuming that the horizon was flat.


- February 4 (first transmission) $y = 0.290 \sin \theta$
- February 4 (second transmission) $y = 0.335 \sin \theta$
- February 5 $y = 0.413 \sin \theta$
- February 6 $y = 0.400 \sin \theta$

The sine curve traces of the horizon images with apparent maximum and minimums indicate a 360 degree azimuthal angular field of view.

b. Vertical: The vertical angular field of view ($28^\circ 48' \pm 2''$) was determined by averaging the values obtained by two different solutions. The plus or minus 2-degree tolerance reflects a judgment rather than a precise figure.

(1) Utilizing the first facsimile panorama on February 4, an effective focal length was graphically determined by adjusting a 16 degree tilt-angle overlay (See Paragraph

2a and Sketch A) to the points of zero and maximum tilt which provided a focal point. The focal length was measured directly on the constructed graphic.

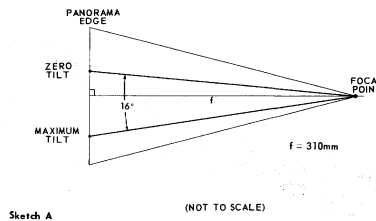

By applying the derived focal length to the format size, the vertical angular field of view was computed to be approximately $28^\circ 30'$.

(2) Employing ground photography, the true ground dimension of the "photometric" device and its distance from the camera station were computed (See Paragraph 5). An effective "blow-up" focal length for the facsimile panorama was computed from the following equation:

$$\frac{f}{D} = \frac{d2}{d1}$$

where f = focal length of panorama (303mm)

D = distance from camera station to device on panorama but determined from ground photography

d2 = dimension of device as measured on panorama
 d1 = true dimension of device as determined from ground photography

The derived focal length together with the format size provided a vertical angular field of view of approximately $29^\circ 06'$.

2. Tilt of Facsimile Scanner Rotation Axis

a. Relative to lunar horizon: The tilt angle is defined as the angle between the scanner rotation axis and a normal to the assumed flat terrain. To obtain the points of maximum slope (inflection points), tangent lines were graphically constructed at various points on the horizon and the tilt angle was measured directly. The tilt values are mean values with an accuracy of plus or minus 1.5 degrees.

	RANGE (Degrees)	TILT (Degrees)
February 4 (first transmission)	15 - 17	16
February 4 (second transmission)	16 - 19	17.5
February 5	21 - 24	22.5
February 6	21 - 24	22.5

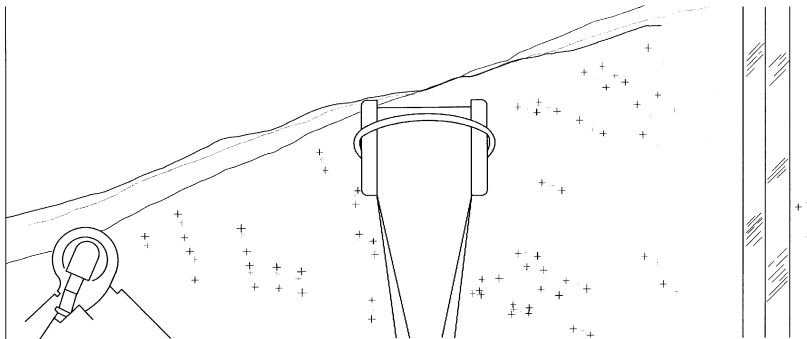


FIGURE 5. PLOTTED MOVEMENT OF OBJECTS BETWEEN TRANSMISSIONS.

SECRET

Approved For Release 2003/08/05 : CIA-RDP02T06408R000400010015-0

NPIC/R-5022/66

25X1

The relative displacement of conjugate imagery (See Figure 5) showed that the spacecraft moved between the first and second transmissions on February 4 and once again between the second transmission on February 4 and the transmission on February 5. To isolate the axis of capsule movement, traces of conjugate imagery from successive transmissions were plotted on an established base using capsule components (mirrors, antennas, feet) as references, assuming that the relative position of the components remained fixed. The displacement of the imagery and the near intersection of the different horizon images indicate that the movement was a rotation about an axis located in an area approximately 35 degrees to the right of the capsule foot displaying the prominent protuberance. The axis of rotation was approximately the same for both movements and the second movement produced the greater amount of rotation. No evidence of movement between other transmissions could be found. The difficulty in exactly locating the axis of rotation was that a scale change between transmissions hindered overlay traces. Therefore, image displacement could not be definitely attributed to the scale change or actual capsule rotation. Variations in the image quality of the transmissions considerably reduced the number of traceable images. The missing portions of the panoramas precluded comparative traces in those areas.

b. Relative to direction of sunlight: The tilt of the

scanner axis relative to the direction of sunlight was determined by using the declination of the sun, the previously derived tilt of the scanner axis relative to the lunar horizon (See Paragraph 2a), and the angle between the azimuth of the sun's ray and the azimuth of the inclined scanner rotation axis. The angle of the sun above the local horizon was derived by computing and combining the selenographic

coordinates of the sun with the known coordinates of the Luna-9 capsule. The selenographic coordinates of the sun at a time T_p (Universal Time of a point on the panorama where the shadows indicate the point was looking directly into the sun) were obtained by interpolation from the American Ephemeris and Nautical Almanac (See Figure 6). The selenographic latitude and longitude of the capsule were reported in a Soviet Communique of 6 February 1966. The Law of Cosines was used to determine the angle subtended at the moon's center between the vectors extended to the sun and capsule. The sun angle is the complement of the subtended angle (See Sketch B).



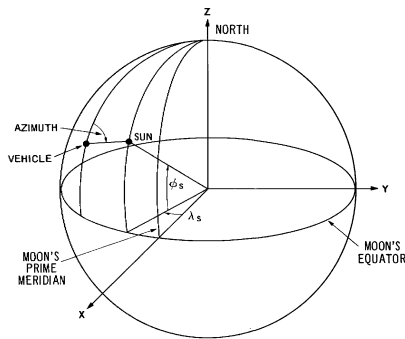


FIGURE 6. SELENOGRAPHIC COORDINATE SYSTEM.

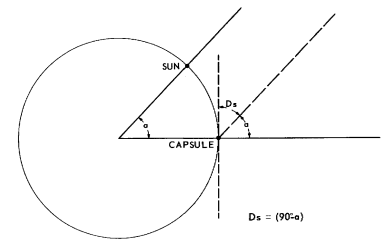

Sketch B

25X1

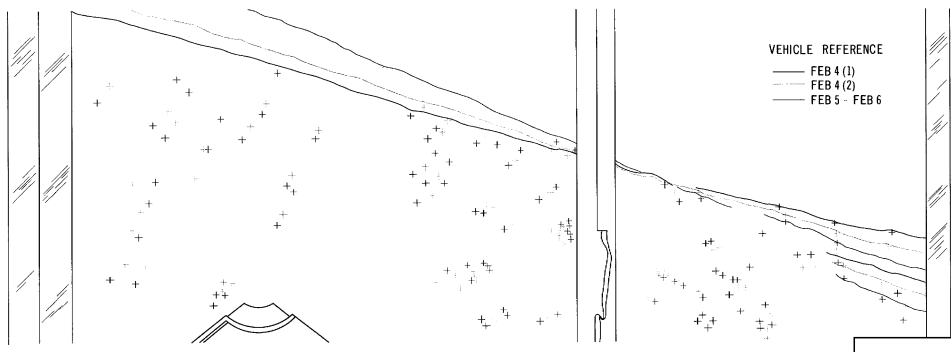


SECRET

Approved For Release 2003/08/05 : CIA-RDP02T06408R000400010015-0

25X1

25X1

The Law of Sines was used to compute the azimuth of the scanner axis at the time T_0 . Knowing that the azimuth toward which the scanner rotation axis is inclined is approximately N 80°E, the angle between the scanner rotation axis and the sun's ray was computed using direction cosines (See Sketch C).

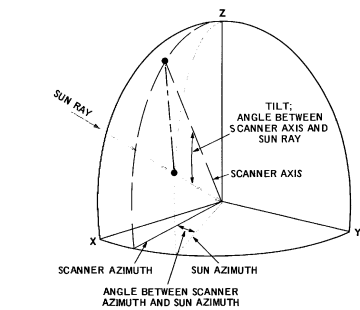

Sketch C

Panorama	Tilt	Sun Angle	Azimuth
February 4 (first transmission)	67°	07°27'	92°26'
February 4 (second transmission)	59°	14°09'	93°18'
February 5	42°30'	26°29'	95°12'
February 6	29°	41°01'	98°13'

3. Mirror Data

The three dihedral mirrors mounted on the capsule image six areas of the lunar surface. Each mirror consists of two plane surfaces intersecting at a 90-degree angle. Mirrors one and two (See Figure 7) are of similar size, are mounted on the outer edge of the capsule, and are offset by 180 degrees. Mirror three which is smaller than the other two is located closer to the scanner turret. By printing the panorama negatives in reverse, the mirror images were correlated to the conjugate lunar surface images. Because the capsule was tilted, the imaged areas

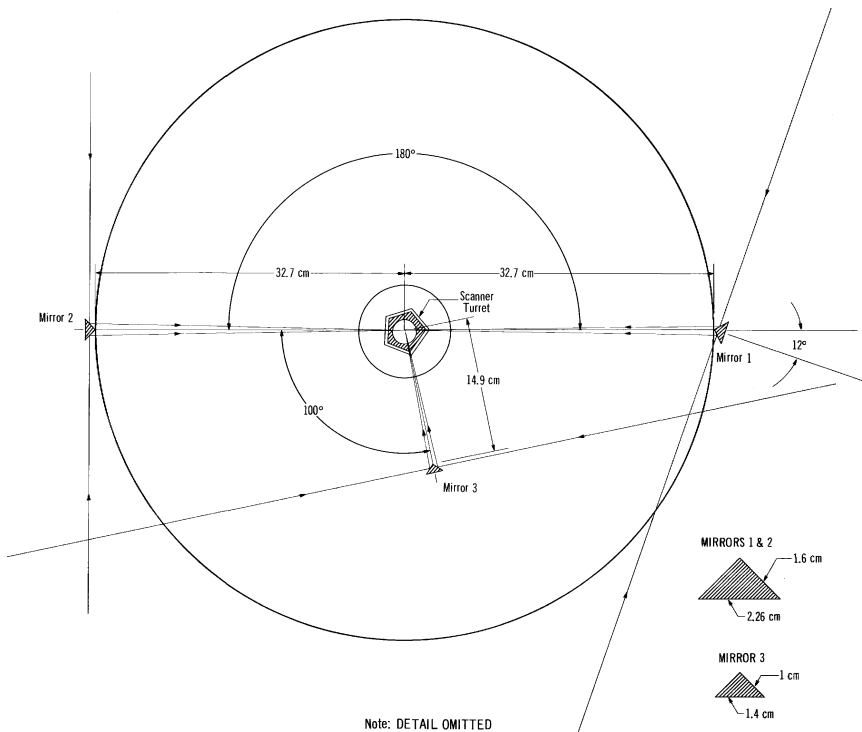


FIGURE 7. MIRROR DIAGRAM.

SECRET

NPIC/R-5022/66

Approved For Release 2003/08/05 : CIA-RDP02T06408R000400010015-0

25X1

vary in size and in distance from the capsule. Plots of images from the right face of mirror two and the left face of mirror one intersect at a point on the lunar surface approximately six feet from the capsule. By using the distance between the mirrors and the distance to the point of intersection, the orientation of the mirrors was determined to within plus or minus 1.5 degrees. Mirror two was rotated approximately 2 degrees counter-clockwise and mirror one was rotated approximately 12 degrees clockwise about the vertical axis. Rotation about a vertical axis was also indicated by the unequal imaging of the mirror faces in the panorama. The faces of mirror three were oriented at equal angles to the optical axis of the scanner based on the equal imaging of the mirror faces in the panorama. The faces of mirror one were not oriented at equal angles to the optical axis based on the unequal imaging of the faces in the panorama. The resolution of the panorama did not permit detection of the 2 degree rotation of mirror two. Mirrors one and two each occupy approximately 3.7 degrees of the panorama and mirror three occupies approximately 5.6 degrees. Stereoscopic viewing was possible with the corrected mirror images but the quality of the stereo image was at best poor.

4. Capsule Dimensions

Approximate dimensions of the Luna-9 capsule with the petals closed and protective covering in place were obtained from motion picture film T-6376. The height of an average man was used as a basic scale factor. That the man and capsule are equidistant from the camera station and that both are in a vertical plane were assumed. The interior orientation of the taking camera, the camera attitude relative to a vertical datum, and an estimate of the difference in distance from the capsule to the man in a direction parallel to the optical axis were obtained. Using a mensuration base established by the above method,

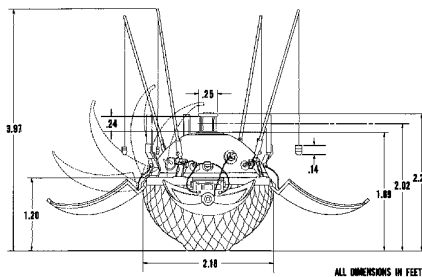
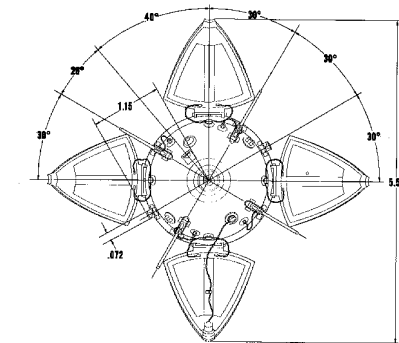


FIGURE 8. LUNA-9 CAPSULE

the maximum diameter of the capsule was computed to be 3 feet.

Employing ground photography of a Luna-9 display (Fair of Permanent Achievement, Moscow), the height of an average man was again used as a scale factor. Additional assumptions were that the Luna-9 capsule is positioned in the middle of the display and that the distance from the man imaged in the background to the camera is twice that of the capsule to the camera. Photo B-18 shows clearly that Luna-9 is in the center of the display. The primary photographs A-10 and A-12 were taken on opposite sides of the capsule. Image space distances (capsule diameters, heights of support poles, and distances between antenna end points) in both photographs agree to within an average error of plus or minus 5 percent. Since the scale and focal length remain constant between the two photos, the distance from the exposure station to the capsule is equal for both pictures. Therefore, a vertical plane through the capsule normal to the "air base" between the exposures stations bisects that "air base". The diameter of the Luna-9 capsule may then be ratioed directly at 1/2 the scale of the average man. The capsule diameter (See Figure 8) with petals unfolded and no protective covering was computed to be 2.18 feet (664.1 millimeters).

An article in the Soviet publication *Aviation and Space* (Issue 3, 1966, page 9) states that the camera is 60 centimeters (1.97') above the surface. It is unknown if this height refers to the scanner turret and accounts for the tilt of the capsule, but the Soviet figures and those computed from ground photography are very close. Based on this agreement and the satisfactory scale agreements between the various sources, the dimension 2.18 feet was selected as a base for computing all other dimensions. All Luna-9 capsule dimensions were then computed using graphical and ratio techniques.

25X1

SECRET

25X1

SECRET

NPIC/R-5022/66

Approved For Release 2003/08/05 : CIA-RDP02T06408R000400010015-0

25X1

5. Sizes and Distances of Objects on Lunar Surface

The derived capsule dimensions enabled estimates to be made of selected lunar surface features by monoscopic methods. The approach involved some of the same photogrammetric techniques used in high oblique aerial photography. Given focal length, height, and orientation, then the ground coordinates or size of any object may be computed.

Mensuration of the Luna-9 capsule provides a basic height of 2.02' to ϵ of scanner axis. Since Luna-9 is in a tilted position, this dimension represents a slant range rather than a height. The true height may then be computed for each scan depending on the amount of tilt.

The effective focal length of Luna-9 may be computed from the scale formula $s = f/h$. The photo distance of the photometric device was measured on the panorama, its ground distance was computed from ground photography, and the distance from the device to the exposure station was known. To solve monoscopically, it is also necessary to make use of the angular field of view which was determined previously.

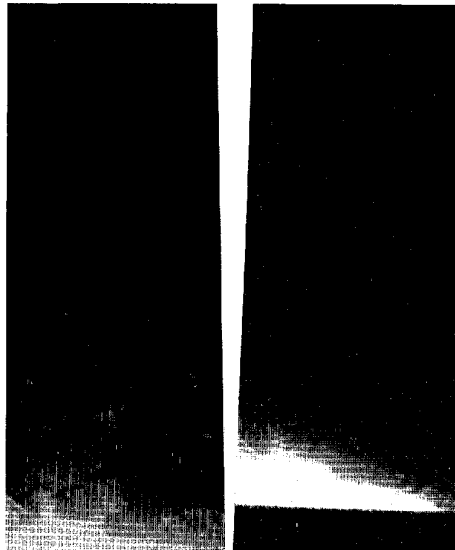


FIGURE 10. STEREO PAIR.


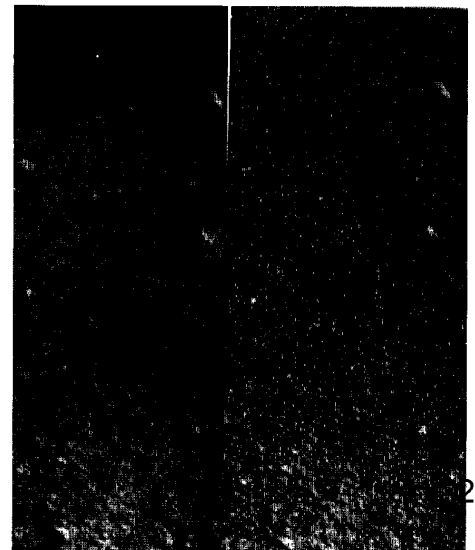


FIGURE 11. STEREO PAIR.

25X1

25X1

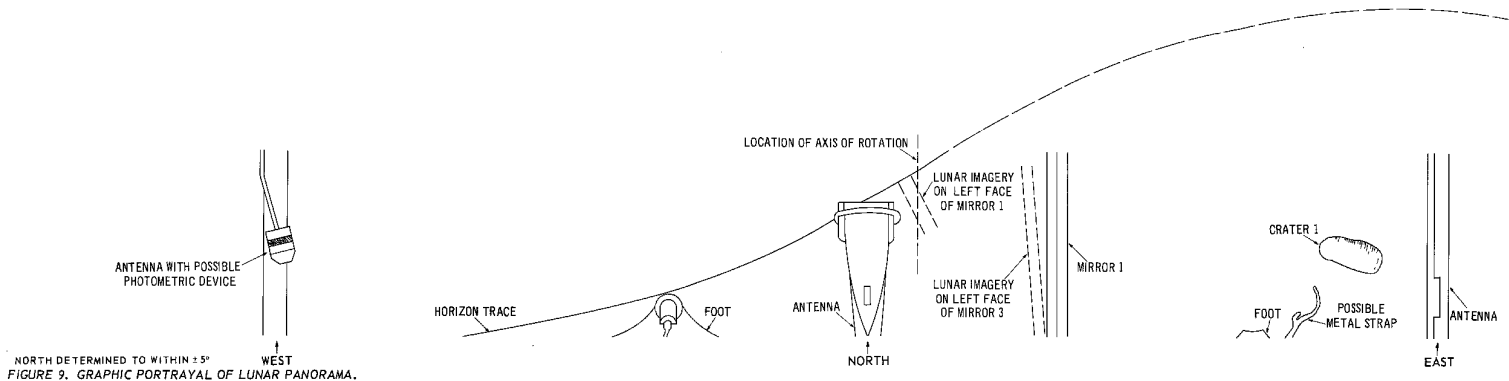

Approved For Release 2003/08/05 : CIA-RDP02T06408R000400010015-0

SECRET

25X1

SECRET

NPIC/R-5022/66

Approved For Release 2003/08/05 : CIA-RDP02T06408R000400010015-0

25X1

The dimensions for selected bits of lunar topography were computed monoscopically and are approximations only (See Figure 9).

Object	Distance from Capsule (Feet)	Size (Inches)
Crater 1	2 3/4	6-9 diam
Rock 1	7-8	6
Rock 2	23	7-8
Rock 3	23	7-8

STEREO BASELINE

Two stereo pairs (See Figures 10 and 11) were included to demonstrate the stereo viewing capability of the facsimile photographs. The pairs were selected from the second transmission of February 4 and the February 5 transmission, and are located at approximately N 20°W and N 20°E.

Assuming that the rotation between transmissions occurred about an axis passing through the base of the capsule, a stereo base was approximated by using the scanner height and the change in the tilt of the scanner axis caused by the rotation. The maximum stereo base for azimuths at N 10°W or S 10°E was computed to be

approximately 2.04 inches. At azimuths of N 20°W and N 20°E, the stereo base was computed to be 2.00 and 1.76 inches, respectively.

DIMENSIONS OF LUNA-9 SPACECRAFT

Dimensions of the Luna-9 spacecraft (See Figure 12) were obtained from both the Soviet motion picture T-6376 and photography of a Luna-9 display at the Fair of Permanent Achievement, Moscow. Because of superior imagery, the "Fair" photography was used as the primary source of detail. The detail of the movie film was such that only an overall length could be determined in addition to several dimensions to verify those obtained from the "Fair" photography. The difference in the overall length as derived from the "Fair" photography and from the movie film was less than 3.5 percent. An average of the two values established the overall length of the spacecraft as 12.16 feet. Employing the motion picture photography, the spacecraft length was obtained graphically by using the height of an average man as a scalar, two ellipses from the spacecraft to establish correct angular relationships, and an approximation of the difference in the distance from the man to the spacecraft


in a direction parallel to the optical axis (See Figure 13). Utilizing the "Fair" photography, the overall spacecraft length was computed in two sections. The front section was ratioed from selected photographs using the capsule diameter with the protective covering in place as a known dimension. The rear section was graphically constructed based on a derived scalar and two derived angular values (See Figure 14). The scalar was the dimension of the black band around the spacecraft just below the covered capsule and was obtained by ratios. The angular values were obtained by determining ellipses from the spacecraft.

The basic construction technique was to construct an arbitrary object space line (center line of the Luna-9 spacecraft). The eccentricity of the two ellipses (images of true circles) with minor axes lying along the object space line was computed according to

$$\sin^{-1} e = \frac{\text{image distance of minor axis}}{\text{image distance of major axis}}$$

The angle (90° - e) was constructed from two arbitrarily spaced points on the object space line. The angles were extended to intersect at the camera lens.

A transparent overlay containing several points of the photograph was constructed. The points representing the top and bottom of the format, the principal point (approximated on cropped photography), two scale points, and the centers of the two ellipses were connected by a line denoted as the image space line. A line was constructed perpendicular to the image space line passing through the principal point and therefore passing through the focal point. The resulting image space system is then positioned so that the rays from the ellipses each pass through their respective transferred point on the overlay, and the optical axis passes through the focal point. The image space line is then located so that the tilt, angular field of view, and focal length are correctly determined. Projecting the images of the scale points onto the object space line determined the scale. Other dimensions were determined by projecting the images onto the "scaled" object space line.

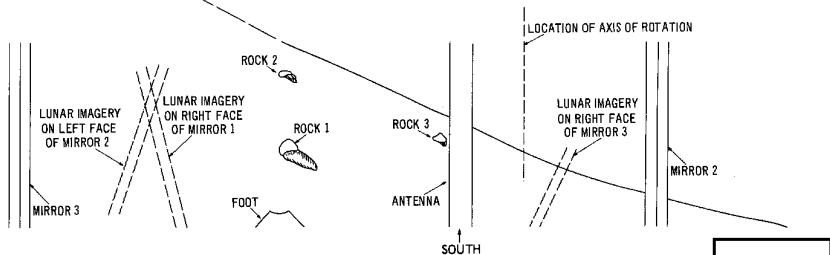

Approved For Release 2003/08/05 : CIA-RDP02T06408R000400010015-0

SECRET

25X1


25X1

SECRET

NPIC/R-5022/66

Approved For Release 2003/08/05 : CIA-RDP02T06408R000400010015-0

25X1

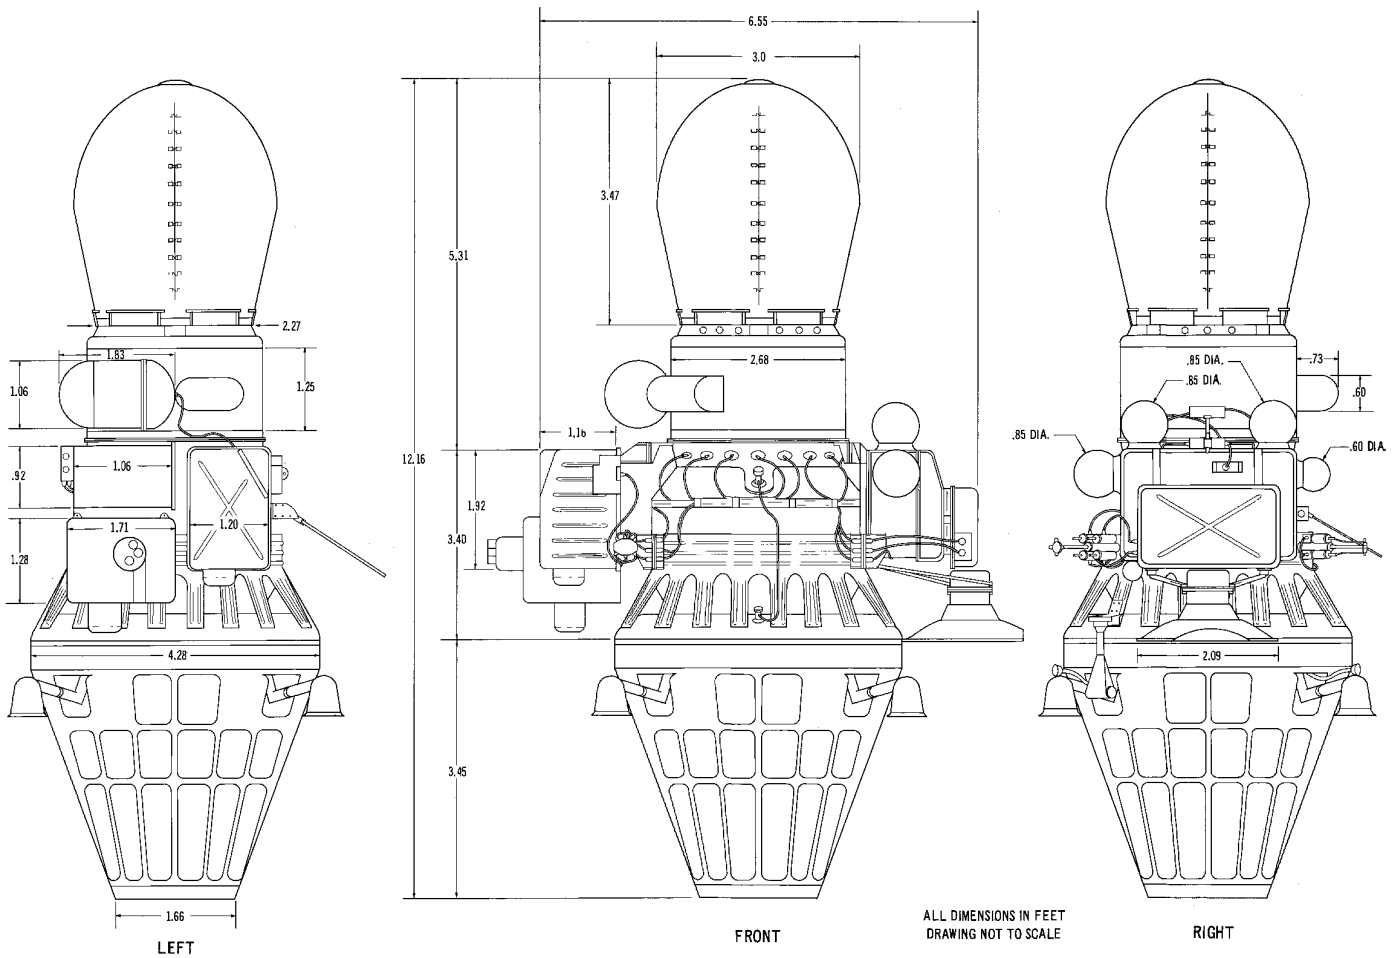

25X1

FIGURE 12. LUNA-9 SPACECRAFT.

Approved For Release 2003/08/05 : CIA-RDP02T06408R000400010015-0

SECRET

25X1

SECRET

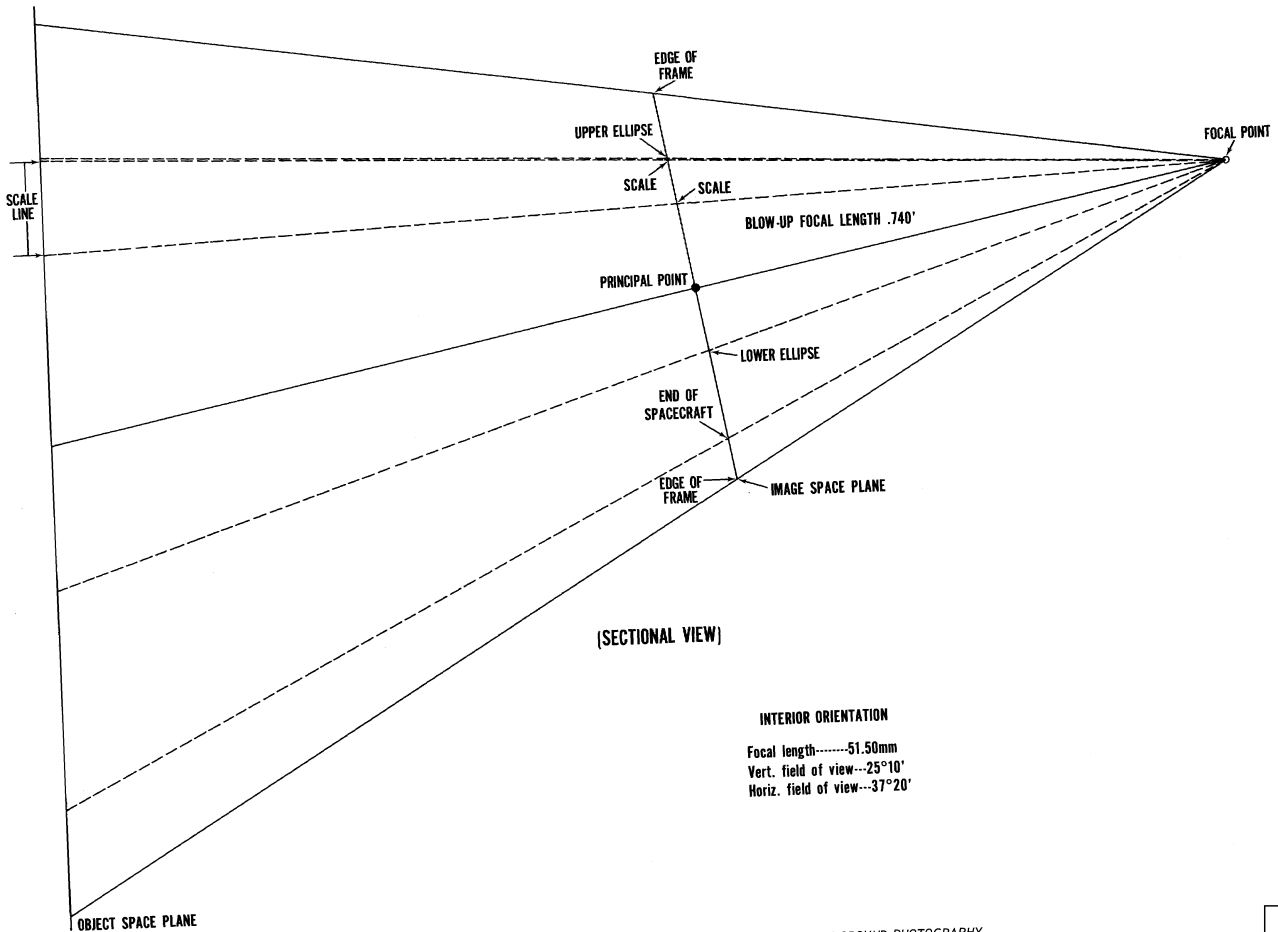


FIGURE 14. GRAPHICAL CONSTRUCTION OF PART OF LUNA-9 SPACECRAFT FROM GROUND PHOTOGRAPHY.

SECRET

25X1

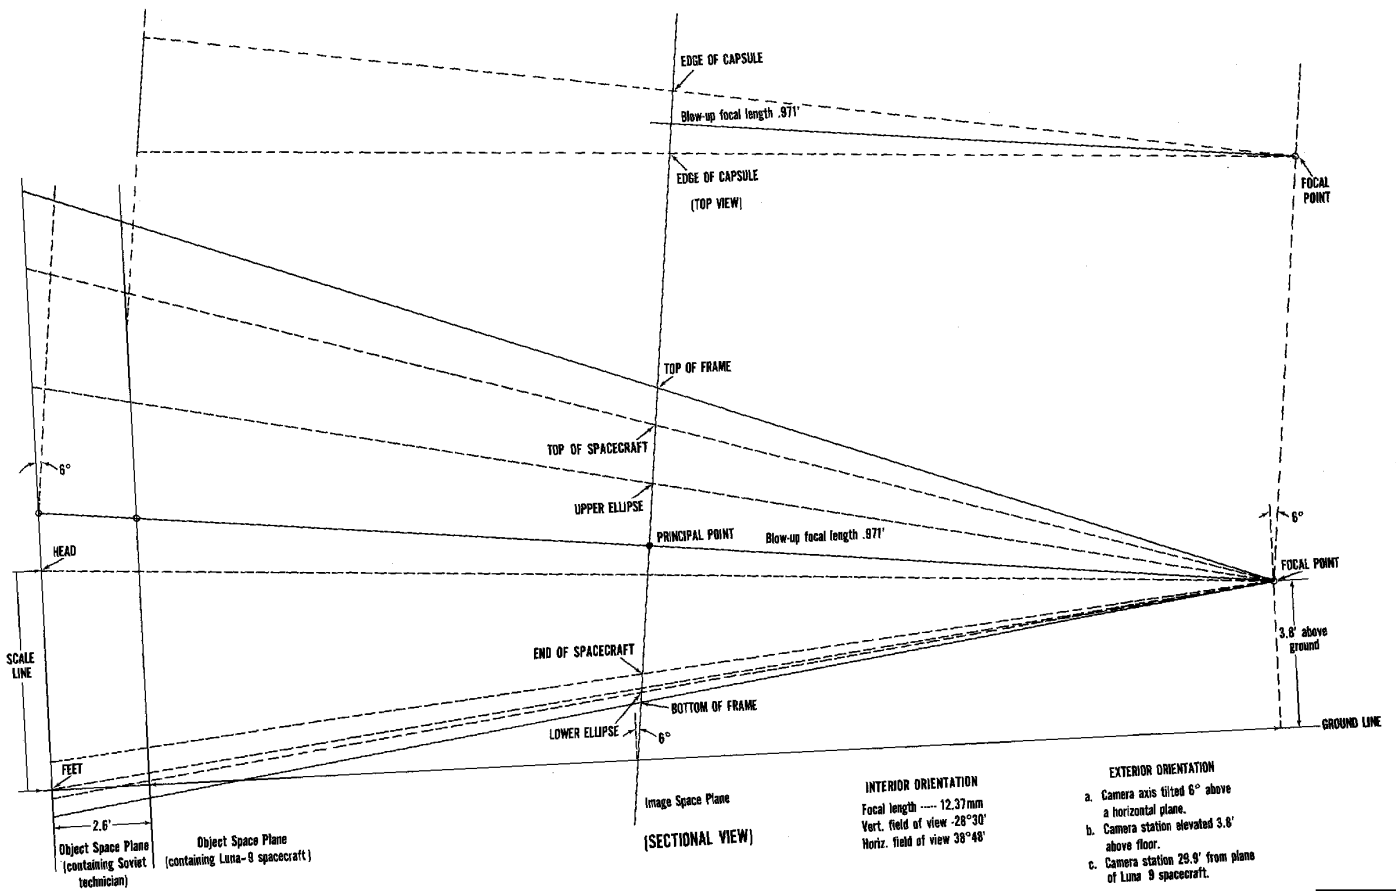


FIGURE 13. GRAPHICAL CONSTRUCTION OF LUNA-9 SPACECRAFT FROM MOVIE FILM.

SECRET

25X1

25X1

SECRET

Approved For Release 2003/08/05 : CIA-RDP02T06408R000400010015-0

NPIC/R-5022/66

25X1

REFERENCES

1. Ground Photography from Luna-9 Exhibit at the Fair of Permanent Achievement, Moscow (USSR/1 901 0070 66/A1-A17G, B1-B26G, D1-D17G) (Confidential)
2. NSA Telemetry Reports, S/O/Rugn R12-66, R14-66, R22-66 (Secret)
3. Soviet Film T-6376 ("Starry Road") (Secret)
4. JPL Technical Report 32-877, Digital Video-Data Handling (Unclassified)
5. Soviet newspaper accounts from Pravda, Tass, and others (Unclassified)
6. Soviet publication, *Aviation and Space*, Issue 3, 1966 (Unclassified)
7. Soviet Bloc Research in Geophysics, Astronomy, and Space No. 126, US Dept. of Commerce (Unclassified)
8. Eugene Shoemaker, Raymond Balson, and Kathleen Larson (USGS), "An Appreciation of Luna 9 Pictures," *Astronautics and Aeronautics*, May 1968 (Unclassified)

REQUIREMENT

CIA/FMSAC. C-DS6-63,440

NPIC PROJECT

22292/66

Approved For Release 2003/08/05 : CIA-RDP02T06408R000400010015-0

SECRET

25X1

25X1

Approved For Release 2003/08/05 : CIA-RDP02T06408R000400010015-0

Approved For Release 2003/08/05 : CIA-RDP02T06408R000400010015-0