

CENTRAL INTELLIGENCE AGENCY

INFORMATION REPORT

This Document contains information affecting the National Defense of the United States, within the meaning of Title 18, Sections 793 and 794, of the U.S. Code, as amended. Its transmission or revelation of its contents to or receipt by an unauthorized person is prohibited by law. The reproduction of this form is prohibited.

SECRET
SECURITY INFORMATION

25X1

COUNTRY USSR
SUBJECT Soviet Missile Parts and Production

REPORT

DATE DISTR. 14 August 1953

NO. OF PAGES 3

DATE OF INFO.

REQUIREMENT

25X1

PLACE ACQUIRED

REFERENCES

25X1

This is UNEVALUATED Information

THE SOURCE EVALUATIONS IN THIS REPORT ARE DEFINITIVE.
THE APPRAISAL OF CONTENT IS TENTATIVE.
(FOR KEY SEE REVERSE)

25X1

SOVIET ADAPTATION OF GERMAN MISSILES

1. [redacted] the Soviets were following a logical plan in making changes from German parts to Soviet parts; [redacted] 25X1

[redacted] At any rate, the sequence of changes in Novaya was as follows: 25X1

- a. Special plugs connecting electrical components
- b. Cables
- c. Relays
- d. Cable connection strips and terminal strips
- e. Radio tubes

2. The only cable designations used on any of the missiles [redacted] were "K-16" and "K-17". [redacted] the "K" stood for the Russian word "kabel". [redacted] either of these cables [redacted] 25X1

[redacted] contained only a single copper conductor wrapped with cotton and were covered with a plastic material which could [redacted] 25X1

25 YEAR RE-REVIEW

SECRET

STATE	#x	ARMY	#x	NAVY	#x	AIR	#x	FBI		AEC				
-------	----	------	----	------	----	-----	----	-----	--	-----	--	--	--	--

(Note: Washington Distribution Indicated By "X"; Field Distribution By "#")

307
25X1

SECRET

25X1

-2-

be in ten different colors. It was the exact equivalent of the German cable. [redacted] the nearest equivalent Soviet cable to a particular German cable, which could be ordered with 6, 12, or 20 conductors, was one having either 7 or 14 conductors. In the Soviet version, the insulation material was blue whereas the German material had been gray. The plastic insulation for both the German and the Soviet versions of these cables was very brittle at low temperatures and very soft under high temperatures. Since there were cases when the exact equivalent cable could not be procured, [redacted] there is some shortage of cables in the USSR.

25X1

25X1

3. In making tube changes, [redacted] guided by a table. [See Enclosure.] [redacted] the second and third columns of this table, under the Russian word "oboznacheniyе") are headed, respectively, "staroye" and "novoye", "old" and "new".

25X1

25X1

25X1

SOVIET BATTERIES

4. The primary electric supply in the missile was 32 volts, furnished by two batteries, each 16 volts, connected in series. The batteries used in the Soviet missiles were old German batteries; the Soviets had taken about 1,000 of these from Bleicherode. [redacted] the German batteries had been a special type that was designed during the war for use in torpedoes.

25X1

5. In addition to the main supply, there was also a reserve battery in each missile. This battery was placed in the missile dry, and about an hour before the missile was to be fired an electrolyte was poured into it, thereby energizing it. This battery could supply 50 volts and had a capacity of 1.5 ampere-hours. [redacted] This was used in the command signal system. Various types of these batteries had been made in Germany.

25X1

6.

[redacted]

25X1

SOVIET GYROS

7. Gyros for the missiles came, [redacted], from Leningrad. [redacted] For one thing, [redacted] gyroscope specialist, RUETLIN, was deported to Leningrad; [redacted] --his actual place of work may have only been near Leningrad). There was much talk, also, that the gyros used had come from Leningrad. Furthermore, the missile without the gyros installed went from Podlipki to Kapustin Yar. [redacted]

25X1

25X1

25X1

GENERAL COMMENTS ON PARTS SUPPLY

8. The Germans in Novaya had no independent plans for development

SECRET

.SECRET

-3-

25X1

work: direction for the Germans always came from the Soviet section chiefs. The Soviets also had complete control over such matters as the budget, and the German chiefs had absolutely no influence or control over it.

25X1

9. Speaking generally, [redacted] all of the Soviet parts were the exact equivalent of the German parts that had been used. [redacted] there were very few parts that were still German. The Soviets seem to have the greatest amount of difficulty in making fine mechanical parts. Soviet equipment seemed to have about the same reliability as did the German. Furthermore, the Soviet technicians seemed to be able to make repairs on components with no particular difficulty. 25X1
10. Perhaps one reason for this Soviet competence is that many of the Soviets [redacted] had been at Bleicherode right after the war and therefore had the opportunity to see the Germans working there. These people, in particular, worked both in the Institute, (NII 885) and at the test site. 25X1
11. Since certain types of German specialists were deported to specific places in the USSR, [redacted] some guesses could be made about where certain missile components are being built or are under development. [redacted] the power plant experts were deported to Khimki. [redacted] the burning chambers and nozzles as well as the outside shells of the missiles came from Khimki. 25X1

SOVIET PRODUCTION OF MISSILES

12. [redacted] there must be a large-scale building program in the USSR, with series production of missiles contemplated, if not actually accomplished. [redacted] this to be the case mostly on the evidence that Kapustinyan is being built up into quite a large and permanent installation [redacted] 25X1
13. [redacted] Podlipki is only an assembly plant. [redacted] compared with the number of buildings in a German installation of the same nature, it is not possible for it to become any more than a plant for assembly. 25X1
14. [redacted] a certain number of "Zero"-type rockets were being built. This was supposed to be either a development or a preproduction series of missiles. [redacted] 25X1

Enclosure: Table of radio tube characteristics (State 4, Army 6, Navy 3, Air 6, OCD 85)

SECRET

25X1

Page Denied

ТАБЛИЦА ПРИЕМНОУСИЛИТЕЛЬНЫХ РАДИОЛАМП

№ п/п	Обозначение		Тип лампы	Накал		Анод		Экр. сетки		См-к	Кру-К	Коз-у	Внут. сопр.	Сопр. напр.	Мощн. расц.	Вых. мощн.	Емкости			Примечания	
	старое	новое		U _г	I _г	U _а	I _а	U _с	I _с								E _г	S	r		R _г
1	954	6КЖ	Пентод УВЧ (жолуь)	6,3	0,15	250	2	100	0,7	-3	1,4	1700	4200	-	12	-	3,4	5007	5	29	
2	955	6С1Ж	Триод УВЧ (жолуь)	6,3	0,15	180	4,3	-	-	-5	2,0	251	12,3	20	15	0,75	1,0	4,4	4,6	3,0	
3	958	6К1Ж	Пентод УВЧ Варимю (жолуь)	6,3	0,15	250	6,7	100	2,7	-3	8	1250	700	-	12	-	3,4	5007	5	29	
4	9002	6С8П	Триод миниатюрный	6,3	0,15	90	2,5	-	-	-2,5	1,7	25	174	-	16	-	1,2	1,1	1,4	2,8	
5	9003	6К19П	Пентод Варимю миниат.	6,3	0,15	250	6,7	100	2,7	-3	1,8	1400	700	-	17	-	3,4	5007	5	29	
6	9004	6Д1Ж	Диод УВЧ (жолуь)	6,3	0,15	117	5,5	-	-	-	-	-	-	-	-	-	-	-	-	-	1
7	1110	1А1П	Гелтод-преобразователь	1,2	0,06	90	0,8	45	1,9	0	0	0,25	800	-	-	-	-	-	-	-	1
8	1511	1А1П	Диод-пентод низкой частоты	1,2	0,06	90	0,8	45	1,9	0	0	0,25	800	-	-	-	-	-	-	-	1
9	1511	1К1П	Пентод В4 Варимю	1,2	0,06	90	1,8	45	0,65	0	0	0,75	800	-	-	-	-	-	-	-	31
10	2011	2011	Оконечный пентод	1,2	0,12	90	3,5	90	2,1	-4,5	2,15	270	100	10	-	0,27	-	-	-	-	31
11	6A8	6A8B	Гелтод-преобразователь	6,3	0,3	250	3	100	2,7	-3	0,51	100	360	-	1	3	12,5	3006	12,5	2,6	
12	6A87	6К150	Пентод УКВ Варимю	6,3	0,45	300	12,5	200	3,2	-3	5,0	3500	700	-	3	-	8,0	0,015	5,0	1,3	
13	6A87	6К146	Пентод УКВ	6,3	0,45	300	10	150	2,5	-2	9	9000	1000	-	3	-	11	4000	5	1,3	
14	6A87	6AЖ5	Пентод УКВ миниатюрный	6,3	0,3	250	7	150	2	-8	5	4000	800	-	2	-	6,5	0,025	1,8	4	
15	6A87	6Ж45	Телевизионный видео-пентод	6,3	0,65	300	30	150	7	-3	11	1430	130	-	9	3,0	13	0,06	7,5	1,2	
16	6B8	6B8B	Двойной диод пентод	6,3	0,3	250	8,0	125	2,3	-3	1,1	730	650	-	2,5	-	6	0,005	9	2,6	
17	6С3М	6С5	Триод	6,3	0,3	250	8,0	-	-	-8	2,0	20	10	10	2,5	0,25	3	2,0	11	3	
18	6Г7	6Р7Б	Двойной диод-триод	6,3	0,3	250	1,1	-	-	-3	1,2	70	58	-	2	-	3,5	4,5	-	-	24
19	6Е5	6Е5	Электронный индикатор	6,3	0,3	250	0,1-5	-	-	-8(0)	0,8	20	25	1000	-	-	-	-	-	-	2,9
20	6Г5	6С2Б	Триод	6,3	0,3	250	9	-	-	-8	2,6	20	77	-	2,5	-	4,2	3,8	5	3	
21	6Г6	6Н1П	Двойной триод миниатюр	6,3	0,45	150	3,0	-	-	-10	5,3	38	71	-	1,5	-	2,2	1,6	0,4	5	
22	6Г7	6Ж7Б	Пентод В4	6,3	0,3	250	2	100	0,5	-3	1,2	1400	12	-	0,75	-	7	5,9	1,2	8	
23	6К7	6К7Б	Пентод В4 Варимю	6,3	0,3	250	7	100	1,7	-3	1,2	1400	12	-	2,25	0,2	7	6,0	1,2	8	
24	6К8	6Д1	Триод-гексод	6,3	0,3	250	2,5	100	2,0	-3	0,3	2,0	1600	800	-	0,8	-	6	0,03	5	27
25	6К9М	6К9	Пентод В4 Варимю	6,3	0,3	250	9	100	2,0	-3	0,3	2,0	1600	800	-	0,8	-	6	0,03	5	27
26	6Н7С	6Н7	Двойной триод класса В	6,3	0,8	300	3,5	100	2,6	-3	0,1	3,2	35	23	8	11	10	4,1	2,4	5,4	21
27	6П3	6П3	Лучевой тетрод	6,3	0,9	250	7,8	250	7	-7,4	6,7	130	21	2,5	20,5	4,5	10	4,0	8	9	
28	6П5	6С4Б	Триод	6,3	0,3	250	1	-	-	-2	1,6	100	63	-	0,4	0,06	2,2	2,8	3,2	2,3	
29	6P6C	6P6	Оконечный пентод	6,3	0,7	250	3,4	250	7	-16,5	2,5	200	80	7	10	3,2	6	0,5	0,5	9	
30	6V6	6P2	Лучевой тетрод	6,3	0,45	250	4,5	250	4,5	-12,5	4,1	250	52	5	12	4,5	9,5	0,7	7,5	9	
31	6A7	6A7B	Гелтод-преобразователь	6,3	0,5	250	3,5	100	8,5	0	0,45	-	1000	-	1	-	9,5	2,0	1,2	15	
32	6B7	6Ж7Б	Пентод В4	6,3	0,3	250	3,0	100	0,8	-3	1,65	2500	1500	-	2,5	-	6,0	0,005	7,0	1,3	
33	6B7	6К116	Пентод В4	6,3	0,3	250	3,0	100	0,8	-3	1,65	2500	1500	-	2,5	-	6,0	0,005	7,0	1,3	
34	6B7	6Н9	Двойной триод	6,3	0,3	250	10,8	150	4,1	-1	4,9	4400	900	-	3	-	8,5	0,003	7,0	1,2	
35	6B7	6Н8	Двойной триод	6,3	0,3	250	9,8	-	-	-2	1,6	70	44	-	1	-	9,2	2,8	3,5	10	
36	6B7	6К7Б	Пентод В4 Варимю	6,3	0,6	250	9	-	-	-8	2,6	20	77	-	2,5	-	4,0	4,0	1,0	10	
37	6B7	6Р7Б	Пентод В4 Варимю	6,3	0,3	250	9,2	100	2,4	-3	2,0	1600	800	-	4	-	6	0,003	7	13	
38	6B7	6Р7Б	Двойной диод триод	6,3	0,3	250	0,9	-	-	-2	1,1	100	90	-	2,5	-	3,2	1,6	3,0	1,4	
39	6B7	6Н10	Двойной триод	6,3	0,3	250	9,5	-	-	-9	1,9	16	8,5	-	2,5	0,3	3,6	2,4	2,8	1,4	
40	9B7	6К12Б	Пентод В4 Варимю	6,3	0,3	250	11,8	12,5	4,4	-7	4,7	4200	900	-	3	-	2,2	2,0	3,0	1,6	
41	6B6M	6X6	Двойной диод	6,3	0,3	125	4	-	-	-1	1,7	4200	900	-	3	-	2,5	0,003	7,0	1,2	
42	6A7C	6A10	Пентод триод с самовозбужден.	6,3	0,3	250	2,4	100	7,1	-3,0	0,35	-	1000	-	1	-	7,5	0,005	1,0	1,5	
43	6L7	6A5B	Гелтод-смеситель	6,3	0,3	250	2,4	100	6,5	-3	0,38	700	800	-	1,75	-	7,5	0,005	1,0	1,5	
44	E-111	6Д1П	Генератор тока телевизора	6,3	1,8	44	-	-	-	-200	4,4	-	-	-	5	-	9,0	1,0	2,2	2,2	
45	7B20	6ЖВ	Пентод малогабаритный УВЧ	6,3	0,5	250	10	100	2,5	-2,4	7,5	15000	2000	-	2,5	-	9,5	0,03	6,25	8	
46	6K6	6П1	Оконечный пентод	6,3	0,4	250	3,3	250	5,5	-8	2,3	160	70	-	8,5	3,4	8,5	0,03	6,25	8	
47	6C6-C	6П4	Оконечный пентод	6,3	0,3	180	1,5	180	2,5	-9	2,3	-	175	-	2,75	1,1	5,8	0,5	7,0	9	
48	6B4-C	6С6	Оконечный триод	6,3	1,0	250	6,0	-	-	-4,5	5,3	4,2	0,8	2,5	1,5	3,5	7,5	1,6	5,5	2	
49	6F7	6С17	Триод-пентод	6,3	0,3	100	3,5	-	-	-3	0,45	8	18	-	-	-	2,5	2,0	3,0	7	
50	2C40		Пентод - 250 6,5 100 1,5 -3 1,1 900 850	6,3	0,3	250	6,5	100	1,5	-3	1,1	900	850	-	-	-	2,5	2,0	3,0	7	
51	2C43		Пентод - 250 6,5 100 1,5 -3 1,1 900 850	6,3	0,75	250	16,5	-	-	-4,8	3,5	7,5	-	-	6,5	0,035	3,2	0,003	12,0	2	
52	12A6	12P6	Лучевой тетрод	6,3	0,9	300	2,6	-	-	-	2,0	45	5	-	-	-	-	-	-	-	
53	6H7-GT	12H1	Двойной триод	12,6	0,15	250	3,0	250	3,5	-12,5	3	-	70	-	7,5	3,4	9	0,3	9	9	
54	6H7-GT	12H1	Пентод универсальный	12,6	0,15	180	7,6	-	-	-6,5	1,9	16	8,4	-	7,5	-	9	9	9	11	
55	6H7-GT	12H1	Пентод универсальный	12,6	0,15	180	7,6	-	-	-6,5	1,9	16	8,4	-	7,5	-	9	9	9	11	
56	12A6-GT	12C2	Триод	12,6	0,15	250	9,0	-	-	-8	2,6	20	17	-	2,5	-	2,2	3,4	3,6	3	
57	12A6-GT	12H10	Двойной триод	12,6	0,15	250	9,0	-	-	-8	2,6	20	17	-	2,5	-	2,2	3,4	3,6	3	
58	12A6-GT	12K12B	Пентод В4 Варимю	12,6	0,15	250	2,0	-	-	-2	1,3	70	53	-	3,0	-	8,5	0,003	7,0	1,2	
59	12A6-GT	12K17B	Пентод В4	12,6	0,15	250	9,2	150	3,4	-2,5	4,0	-	1000	-	2,5	-	6,0	0,005	7,0	1,3	
60	12A6-GT	12K17B	Пентод В4 Варимю	12,6	0,15	250	9,2	100	0,8	-3	1,65	2500	1500	-	2,5	-	6,0	0,005	7,0	1,3	
61	12A6-GT	12P17B	Двойной диод-триод	12,6	0,15	250	9,2	100	2,6												

ТАБЛИЦА ПРИЕМНОУСИЛИТЕЛЬНЫХ РАДИОЛАМП

№ п/п	Обозначение		Тип лампы	Накал		Анод		Экр. сетка		Смещение	Кру. ток	Коз. ушле.	Внут. сопр.	Сопр. напр.	Мощн. вх.	Вых. мощн.	Емкости			Примечания	
	старое	новое		U _г	I _г	U _а	I _а	U _с	I _с								E _с	S	M		R _с
1	954	6К1Ж	Пентод УВ4 (жилья)	6,3	0,15	250	2	100	0,7	-3	1,4	1700	1200	-	12	-	3,4	4007	3	2,9	
2	955	6С1Ж	Триод УВ4 (жилья)	6,3	0,15	180	4,3	-	-	-5	2,0	25	12,3	20	1,5	0,13	1,0	4,9	9,6	3,0	
3	958	6К1Ж	Пентод УВ4 Варимю (жилья)	6,3	0,15	250	6,7	100	2,7	-3	1,5	1250	700	-	12	-	3,4	4007	3	2,9	
4	9002	6С8П	Триод миниатюрный	6,3	0,18	90	2,5	-	-	-2,5	1,7	2,5	174	-	1,6	-	1,2	1,1	1,4	6	
5	9003	6К19П	Пентод Варимю миниат.	6,3	0,15	250	6,7	100	2,7	-3	1,8	1400	700	-	1,7	-	3,4	4007	3	2,9	
6	9004	6Д1Ж	Диод УВ4 (жилья)	6,3	0,15	117	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
7		1А1П	Генер.-преобразователь	1,2	0,05	90	0,8	45	1,9	0	0,25	-	800	-	-	-	-	-	-	-	1
8		1Б1П	Диод-пентод низкой частоты	1,2	0,06	90	-	3мА	0	0	-	50	-	1000	-	-	-	-	-	-	31
9		1К1П	Пентод В4 Варимю	1,2	0,06	90	1,8	45	0,65	0	0,75	-	800	-	-	-	-	-	-	-	
10		2П1П	Оконечный пентод	1,2	0,12	90	9,5	90	2,1	-4,5	2,15	270	100	10	-	0,27	-	-	-	-	31
11	6А8	6А8В	Генер.-преобразователь	6,3	0,3	250	3	100	2,7	-3	0,51	100	360	-	1	-	12,5	4005	12,5	2,6	
12	6А87	6К12С	Пентод УКВ Варимю	6,3	0,45	300	12,5	200	3,2	-3	5,0	3500	700	-	3	-	8,0	6075	5,0	13	
13	6А87	6К14Б	Пентод УКВ	6,3	0,45	300	10	150	2,5	-2	9	9000	1000	-	3	-	11	6000	5	13	
14	6А85	6АЖ5	Пентод УКВ миниатюрный	6,3	0,3	250	7	150	2	-8	5	4000	800	-	2	-	6,5	0,025	1,8	4	
15	6А87	6К15	Телевизионный видео-пентод	6,3	0,65	300	30	150	7	-3	11	1430	130	-	9	3,0	13	0,06	7,5	12	
16	6В8	6В8В	Двухнодный диод пентод	6,3	0,3	250	9,0	125	2,3	-3	1,1	730	650	-	2,5	-	6	0,005	9	2,6	
17	6С5М	6С5	Триод	6,3	0,3	250	8,0	-	-	-8	2,0	20	10	10	2,5	0,25	3	2,0	11	3	
18	6Г7	6Р7Б	Двухнодный диод-триод	6,3	0,3	250	1,1	-	-	-3	1,2	70	58	-	2	-	5	1,5	4,5	24	
19	6Е5	6Е5	Электронный индикатор	6,3	0,3	250	0,1-5	-	-	-8(0)	0,8	20	25	1000	-	-	-	-	-	-	2,5
20	6Г5	6С2Б	Триод	6,3	0,3	250	9	-	-	-8	2,6	20	77	-	2,5	-	4,2	3,8	5	3	
21	6Г6	6М1П	Двухнодный триод миниатюр	6,3	0,45	150	3,0	-	-	-10	5,3	3,8	71	-	1,5	-	2,2	1,6	0,4	5	
22	6Г7	6Ж7Б	Пентод В4	6,3	0,3	250	2	100	0,5	-3	1,2	1400	12	-	0,75	-	7	5,0	12	8	
23	6К7	6К7Б	Пентод В4 Варимю	6,3	0,3	250	7	100	1,7	-3	1,45	1200	800	-	2,25	0,2	7	4,0	12	8	
24	6К8	6Д1	Триод-вакуум	6,3	0,3	250	2,5	100	6,0	-3	0,3	-	500	-	0,5	-	6	0,03	5	27	
25	6К9М	6К9	Пентод В4 Варимю	6,3	0,3	250	9	100	2,0	-3	2,0	1600	800	-	0,5	-	6	0,03	5	27	
26	6Н7С	6Н7	Двухнодный триод класса В	6,3	0,8	300	35	-	-	0	3,2	35	23	8	11	10	4,3	2,4	5,1	21	
27	6П3	6П3	Лучевой тетрод	6,3	0,9	250	7,8	250	7	-14	6,1	130	21	2,5	20,5	6,5	7,0	4,0	8	9	
28	6Р5	6С4Б	Триод	6,3	0,3	250	1	-	-	-2	1,6	100	63	-	0,4	0,06	2,2	2,8	3,2	23	
29	6Р6С	6П2	Оконечный пентод	6,3	0,7	250	3,4	250	7	-16,5	2,5	200	80	7	10	3,2	8	0,5	6,5	9	
30	6Р6	6П2	Лучевой тетрод	6,3	0,45	250	4,5	250	4,5	-12,5	4,1	250	52	5	12	4,5	3,5	0,7	7,5	9	
31	6С17	6А1ББ	Генер.-преобразователь	6,3	0,9	250	3,5	100	8,5	0	0,45	-	1000	-	1	-	3,5	5,0	12	15	
32	6С17	6Ж7Б	Пентод В4	6,3	0,3	250	3,0	100	0,8	-3	1,65	2500	1500	-	2,5	-	6,0	0,005	7,0	13	
33	6С17	6К11Б	Пентод В4	6,3	0,3	250	10,8	100	4,1	-1	4,9	4400	900	-	3	-	8,5	0,005	7,0	12	
34	6С17	6Н9	Двухнодный триод	6,3	0,3	250	2,3	-	-	-2	1,6	70	44	-	1	-	3,2	2,8	5,5	10	
35	6С17	6Н8	Двухнодный триод	6,3	0,6	250	9	-	-	-8	2,6	20	77	-	2,5	-	4,4	4,4	1,0	10	
36	6С17	6К17Б	Пентод В4 Варимю	6,3	0,3	250	9,2	100	2,4	-3	2,0	1600	800	-	4	-	6	0,005	7	13	
37	6С17	6Р7Б	Двухнодный диод-триод	6,3	0,3	250	0,9	-	-	-2	1,1	100	90	-	2,5	-	3,2	1,6	3,0	14	
38	6С17	6Р1Б	Двухнодный диод-триод	6,3	0,3	250	0,9	-	-	-2	1,1	100	90	-	2,5	-	3,6	2,4	2,8	14	
39	6С17	6Н10	Двухнодный триод	6,3	0,3	250	2,0	-	-	-9	1,9	16	8,5	-	2,5	0,3	3,6	2,4	2,8	14	
40	6С17	6К12Б	Пентод В4 Варимю	6,3	0,3	250	11,8	12,5	4,4	-1	4,7	4200	900	-	3	-	2,2	2,0	3,0	16	
41	6С17	6К6	Двухнодный диод	6,3	0,3	125	4,4	-	-	-	4,7	4200	900	-	3	-	8,5	0,005	7,0	12	
42	6С17	6А10	Пентод с самовозбуждением	6,3	0,3	250	2,4	100	7,1	-3,0	0,35	-	1000	-	1	-	7,5	0,005	11,0	15	
43	6Л7	6А5Б	Генер.-смеситель	6,3	0,3	250	2,4	100	6,5	-3	0,38	700	800	-	1,75	-	7,5	0,005	11,0	22	
44	6С17	6Д17	Генератор тока телевизора	6,3	1,8	44	-	200	1	4,4	-	-	-	-	5	-	1,5	1,5	1,0	2,2	
45	6С17	6Ж8	Пентод маломощный УВ4	6,3	0,5	250	10	100	1,5	-2,4	7,5	1500	2000	-	2,5	-	3,3	0,03	6,25	8	
46	6К6	6П1	Оконечный пентод	6,3	0,4	250	3,3	250	5,5	-8	2,3	160	70	-	8,5	3,4	8,5	3,4	9	9	
47	6С6С	6П4	Оконечный пентод	6,3	0,3	180	15	180	2,5	-9	2,3	-	175	-	2,75	1,1	5,5	9,5	7,0	9	
48	6С4С	6С6	Оконечный триод	6,3	1,0	250	6,0	-	-	-4,5	5,3	4,2	0,8	2,5	1,5	3,5	7,5	1,6	5,5	2	
49	6Ф7	6С177	Триод-пентод	6,3	0,3	100	3,5	-	-	-3	0,45	8	18	-	-	-	2,5	2,0	3,0	7	
50			пентод	6,3	0,3	250	6,5	100	1,5	-3	1,1	900	850	-	-	-	3,2	2,0	3,0	7	
51	2С40		Триод УКВ маломощный	6,3	0,75	250	16,5	-	-	-4,8	3,5	7,5	-	6,5	0,035	-	-	-	-	12,0	
52	2С43		Триод УКВ маломощный	6,3	0,9	300	2,6	-	-	-9,0	4,5	5	-	-	-	-	-	-	-	2	
53	12А6	12П6	Лучевой тетрод	12,6	0,15	250	3,0	250	3,5	-12,5	3	-	70	-	7,5	3,4	9	0,3	9	9	
54	12А7-ГТ	12Н11	Двухнодный триод	12,6	0,15	180	7,6	-	-	-6,5	1,9	16	8,4	-	2,0	-	3	3	3	11	
55	12А7-ГТ	12Ж11	Пентод универсальный	12,6	0,15	210	2,0	7,5	0,55	-2,3	1,5	2000	1400	-	2,0	-	2,0	-	-	16	
56	12С5-С1	12С2	Триод	12,6	0,15	250	9,0	-	-	-8	2,6	20	7,7	-	2,5	-	3,4	3,4	3,6	3	
57	12С67	12Н10	Двухнодный триод	12,6	0,15	250	2,0	-	-	-2	1,3	70	5,3	-	2,5	-	2,2	2,0	5,0	16	
58	12С67	12К12Б	Пентод В4 Варимю	12,6	0,15	250	9,2	150	3,4	-2,5	4,0	-	1000	-	3,0	-	6,5	0,005	7,0	12	
59	12С17	12Ж17Б	Пентод В4	12,6	0,15	250	9,2	100	0,8	-3	1,65	2500	1500	-	2,5	-	6,0	0,005	7,0	13	
60	12С17	12К17Б	Пентод В4 Варимю	12,6	0,15	250	9,2	100	2,6	-3	2,0	1600	800	-	4,0	-	6,0	0,005	7,0	13	
61	12С67	12Р17Б	Двухнодный диод-триод	12,6	0,15	250	0,9	-	-	-2	1,1	100	91	-	2,5	-	3,2	1,6	3,0	14	
62	1																				

enclosure

ТАБЛИЦА ПРИЕМНОУСИЛИТЕЛЬНЫХ РАДИОЛАМП

№ п/п	Обозначение		Тип лампы	Накал		Анод		Экр. сетка		См. экран	Кру. уш. м	Коз. уш. м	Внут. сопр.	Внут. сопр.	Мощ. расщ. а	Вых. мощ.	Емкости			Примечания		
	старое	новое		U _н	I _н	U _а	I _а	U _с	I _с								E _с	S	R _с		R _а	R _в
1	954	6Ж1Х	Пентод УВ4 (жолтый)	6,3	0,15	250	2	100	0,7	-	1,4	1700	1200	-	12	-	3,4	4007	5	29		
2	955	6С1Х	Триод УВ4 (жолтый)	6,3	0,15	180	4,3	-	-	-	2,0	25	12,3	20	1,5	0,15	1,0	4,4	4,6	30		
3	958	6Ж1Х	Пентод УВ4 Варимю (жолтый)	6,3	0,15	250	6,7	100	2,7	-	1,8	1750	700	-	1,8	-	3,4	4007	5	29		
4	9002	6С8Л	Триод миниатюрный	6,3	0,18	90	2,5	-	-	-	2,5	1,7	2,5	17,4	-	1,6	-	1,2	1,1	1,4	6	
5	9003	6К19П	Пентод Баритом миниат.	6,3	0,15	250	6,7	100	2,7	-	1,8	1400	700	-	1,7	-	3,4	4007	5	29		
6	9004	6Д1Х	Диод УВ4 (жолтый)	6,3	0,15	117	5,8	-	-	-	-	-	-	-	-	-	-	0,01	3	4		
7		1А1П	Геттод-преобразователь	1,2	0,06	90	0,8	45	1,9	0	0,25	-	-	-	-	-	-	1,3	1	7		
8		1Б1П	Диод-пентод низкой частоты	1,2	0,06	90	-	45	1,9	0	0	50 ^м	800	-	-	-	-	-	-	-		
9		1К1П	Пентод В4 Варимю	1,2	0,06	90	-	45	1,9	0	0,75	-	-	1000	-	-	-	-	-	-		
10		2П1П	Оконечный пентод	1,2	0,12	90	9,5	90	2,1	-	4,5	215	270	100	-	0,27	-	-	-	-	31	
11	6АВ	6АВ5	Геттод-преобразователь	6,3	0,3	250	3	100	2,7	-	0,51	100	360	-	1	-	1,5	4006	12,5	26		
12	6АВ7	6К155	Пентод УКВ варимю	6,3	0,45	300	12,5	200	3,2	-	3,0	3500	700	-	3	-	8,0	0,015	5,0	13		
13	6АС7	6Ж15	Пентод УКВ	6,3	0,45	300	10	150	2,5	-	2	9	9000	1000	-	3	-	11	4000	5	13	
14	6АС5	6АЖ5	Пентод УКВ миниатюрный	6,3	0,3	250	7	150	2	-	5	4000	800	-	2	-	6,5	0,025	1,8	4		
15	6АС7	6Ж15	Телевизионный видео-пентод	6,3	0,65	300	30	150	7	-	3	11	1430	130	-	9	3,0	13	0,06	7,5	12	
16	6В8	6В8В	Двойной диод пентод	6,3	0,3	250	3,0	125	2,3	-	3	11	730	650	-	2,5	-	6	0,005	9	26	
17	6С5М	6С5	Триод	6,3	0,3	250	8,0	-	-	-	8	2,0	20	10	-	2,5	0,25	3	2,0	11	3	
18	6Г7	6Р7Б	Двойной диод-триод	6,3	0,3	250	1,1	-	-	-	3	1,2	70	58	-	2	-	3	1,5	4,5	24	
19	6С5	6С5	Электронный индикатор	6,3	0,3	250	0,1-5	-	-	-	8(0)	0,8	20	25	1000	-	-	-	-	-	2,9	
20	6Г5	6С2Б	Триод	6,3	0,3	250	9	-	-	-	8	2,6	20	77	-	2,5	-	4,2	3,8	5	3	
21	6Г6	6Н1П	Двойной триод миниатюр	6,3	0,45	150	3,0	-	-	-	10	5,3	3,8	71	-	1,5	-	1,2	1,6	0,4	5	
22	6Г7	6Ж7Б	Пентод В4	6,3	0,3	250	2	100	0,5	-	3	12	1400	12	-	0,75	-	7	0,05	12	8	
23	6К7	6К7Б	Пентод В4 Варимю	6,3	0,3	250	7	100	1,7	-	3	1,45	1200	800	-	2,25	-	7	0,005	12	8	
24	6К8	6Д1	Триод-сексод	6,3	0,3	250	2,5	100	6,0	-	3	0,3	-	500	-	0,8	-	6	0,03	5	27	
25	6К9М	6К9	Пентод В4 Варимю	6,3	0,3	250	9	100	2,6	-	3	2,0	1600	800	-	4	-	6	0,005	11	8	
26	6Н7С	6Н7	Двойной триод класса В	6,3	0,8	300	3,5	-	-	0	3,2	3,5	23	8	-	11	10	4,5	4,0	11	8	
27	6П3	6П3	Лучевой тетрод	6,3	0,9	250	7,8	250	7	-	14	61	130	21	2,5	20,5	6,5	7,0	2,4	5,4	21	
28	6Р5	6С4Б	Триод	6,3	0,3	250	1	-	-	-	2	1,6	100	63	-	0,4	0,06	2,2	2,8	3,2	23	
29	6Р6С	6П6	Оконечный пентод	6,3	0,7	250	4,4	250	7	-	16,5	2,5	200	80	-	10	3,2	8	0,5	6,5	9	
30	6Р6	6П2	Лучевой тетрод	6,3	0,45	250	4,5	250	4,5	-	12,5	4,1	250	52	-	12	4,5	9,5	0,7	7,5	9	
31	6Х7	6А15Б	Геттод-преобразователь	6,3	0,3	250	3,5	100	8,5	-	0	0,45	-	1000	-	1	-	3,5	5,0	12	15	
32	6С17	6Ж17Б	Пентод В4	6,3	0,3	250	3,0	100	0,8	-	3	1,65	2500	1500	-	2,5	-	6,0	0,005	7,0	13	
33	6С17	6Ж11Б	Пентод В4	6,3	0,3	250	3,0	100	0,7	-	1	4,9	4400	900	-	3	-	8,5	0,005	7,0	12	
34	6С17	6Н9	Двойной триод	6,3	0,3	250	2,3	-	-	-	1,6	70	44	-	1	-	3,2	2,8	3,5	10	10	
35	6С17	6Н8	Двойной триод	6,3	0,6	250	9	-	-	8	2,6	2,0	77	-	2,5	-	4	4	10	10	10	
36	6С17	6К7Б	Пентод В4 Варимю	6,3	0,3	250	9,2	100	2,4	-	3	2,0	1600	800	-	4	-	6	0,005	7	13	
37	6С17	6Р17Б	Двойной диод-триод	6,3	0,3	250	0,9	-	-	-	2	1,1	100	90	-	2,5	-	3,2	1,6	3,0	14	
38	6С17	6Р15	Двойной диод-триод	6,3	0,3	250	9,5	-	-	-	9	1,9	16	8,5	-	2,5	0,3	3,6	2,4	3,0	14	
39	6С17	6Н10	Двойной триод	6,3	0,3	250	2,0	-	-	-	2	1,4	70	50	-	2,5	-	2,2	2,0	3,0	16	
40	6С17	6К12Б	Пентод В4 Варимю	6,3	0,3	250	11,8	125	4,4	-	4,7	4200	900	-	3	-	8,5	0,005	7,0	12		
41	6С17	6Х6	Двойной диод	6,3	0,3	250	1	-	-	-	2	1,6	100	63	-	0,4	0,06	2,2	2,8	3,2	23	
42	6С17	6А10	Пентагид с самовозбужден.	6,3	0,3	250	24	100	7,1	-	3,0	0,35	-	1000	-	1	-	7,5	0,005	14,0	15	
43	6С17	6А5Б	Геттод-смеситель	6,3	0,3	250	2,4	100	6,5	-	3	0,38	700	800	-	1,75	-	7,5	0,001	14,0	22	
44	6С17	6Д17	Генератор тока телевизора	6,3	1,8	44	-	-	-	2,0	1,1	4,4	-	-	-	-	-	-	-	-	2,2	
45	6С17	6Ж17	Пентод малогабаритный УВ4	6,3	0,5	250	10	100	2,5	-	2,4	7,5	15000	2000	-	2,5	-	3,3	0,03	6,25	8	
46	6С17	6П1	Оконечный пентод	6,3	0,4	250	3,3	250	5,5	-	2,3	160	70	-	8,5	3,4	8,5	3,4	9	9	9	
47	6С17	6П4	Оконечный пентод	6,3	0,3	180	15	180	2,5	-	9	2,3	-	175	-	8,75	11	5,5	9,5	7,0	9	
48	6С17	6С6	Оконечный триод	6,3	1,0	250	60	-	-	-	4,5	5,3	4,2	0,8	2,5	1,5	3,5	7,5	1,6	5,5	2	
49	6С17	6С177	Триод-пентод	6,3	0,3	100	3,5	-	-	-	3	0,45	8	18	-	-	-	2,6	2,0	3,0	7	
50	6С17	6С177	Триод-пентод	6,3	0,3	100	3,5	-	-	-	3	1,1	900	850	-	-	-	3,2	0,005	12,0	7	
51	2С40		Триод УКВ маячковый	6,3	0,75	250	16,5	-	-	-	4,8	35	7,5	-	6,5	0,035	-	-	-	-	2	
52	2С43		Триод УКВ маячковый	6,3	0,9	300	2,6	-	-	-	9,0	4,5	5	-	-	-	-	-	-	-	-	
53	12А6	12П6	Лучевой тетрод	12,6	0,15	250	3,0	250	3,5	-	12,5	3	-	70	-	7,5	3,4	9	0,3	9	9	
54	12А7-ГТ	12Н1	Двойной триод	12,6	0,15	180	7,6	-	-	4,5	1,9	16	8,4	-	2,0	-	3	3	3	3	11	
55	12А7-200	12К1Л	Пентод универсальный	12,6	0,15	210	2,0	75	0,55	-	2,3	1,5	2000	1400	-	2,0	-	2,0	-	-	16	
56	12С6-ГТ	12С2	Триод	12,6	0,15	250	9,0	-	-	-	8	2,6	20	7,7	-	2,5	-	3,4	3,4	3,6	3	
57	12С67	12Н10	Двойной триод	12,6	0,15	250	2,0	-	-	-	2	1,3	70	5,3	-	2,5	-	2,2	2,0	5,0	16	
58	12С67	12К12Б	Пентод В4 Варимю	12,6	0,15	250	9,2	150	3,4	-	2,5	40	-	10000	-	3,0	-	6,5	0,005	7,0	12	
59	12С67	12Ж17Б	Пентод В4	12,6	0,15	250	9,2	100	0,8	-	3	1,65	2500	1500	-	2,5	-	6,0	0,005	7,0	13	
60	12С67	12К17Б	Пентод В4 Варимю	12,6	0,15	250	9,2	100	0,8	-	3	2,0	1600	8								

ТАБЛИЦА ПРИЕМНОУСИЛИТЕЛЬНЫХ РАДИОЛАМП

№ п/п	Обозначение		Тип лампы	Накал		Анод		Экр. сетка		Смещение	Крутизна	Доз. ушле.	Внутр. сопр.	Сопр. напр.	Мощность	Вых. мощ.	Емкости			Примечания
	старое	новое		Ц ₁	Ц ₂	Ц ₃	Ц ₄	Ц ₅	Ц ₆								Ц ₇	Ц ₈	Ц ₉	
1	954	6К1Ж	Триод УВЧ (желез)	6,3	0,15	250	2	100	0,7	-3	1,4	1700	1200	-	12	3,4	400	5	29	
2	955	6С1Ж	Триод УВЧ (желез)	6,3	0,15	180	4,3	-	-	-5	2,0	25	12,5	20	1,5	0,13	3,0	1,4	3,6	30
3	958	6К1Ж	Пентод УВЧ Варимю (желез)	6,3	0,15	250	6,7	100	2,7	-3	1,8	1250	700	-	1,2	-	3,1	400	5	29
4	9002	6С8П	Триод миниатюрный	6,3	0,15	90	2,5	-	-	-2,5	1,7	2,5	17,5	-	1,6	-	1,2	1,1	1,4	6
5	9003	6К19П	Пентод Варимю миниат.	6,3	0,15	250	6,7	100	2,7	-3	1,8	1400	700	-	1,7	-	3,4	400	5	4
6	9004	6Д1Ж	Диод УВЧ (желез)	6,3	0,15	117	5,5	-	-	-	-	-	-	-	-	-	-	-	-	1
7		1А1П	Генлок-преобразователь	1,2	0,06	90	0,8	45	1,9	0	0,25	-	800	-	-	-	-	-	-	1,3
8		1Б1П	Диод-пентод низкой частоты	1,2	0,06	90	0,8	45	1,9	0	0,25	-	800	-	-	-	-	-	-	1,3
9		1К1П	Пентод В4 Варимю	1,2	0,06	90	0,8	45	1,9	0	0,25	-	800	-	-	-	-	-	-	1,3
10		2П1П	Оконечный пентод	1,2	0,12	90	3,5	90	2,1	-4,5	2,15	270	100	10	-	0,27	-	-	-	31
11	6А8	6А8Б	Генлок-преобразователь	6,3	0,3	250	3	100	2,7	-3	0,51	100	360	-	1	12,5	400	12,5	2,6	
12	6А8В	6К150	Пентод УКВ Варимю	6,3	0,45	300	12,5	200	3,2	-3	5,0	3500	700	-	3	8,0	0,015	5,0	13	
13	6А8Г	6К146	Пентод УКВ	6,3	0,45	300	10	150	2,5	-2	9	9000	1000	-	3	11	0,005	5	13	
14	6А8Д	6АЖ5	Пентод УКВ миниатюрный	6,3	0,3	250	7	150	2	-8	5	4000	800	-	2	6,5	0,025	1,8	4	
15	6А8Е	6АЖ5	Телевизионный видео-пентод	6,3	0,65	300	30	150	7	-3	11	1430	130	-	9	3,0	13	0,06	7,5	12
16	6В8	6В8Б	Двойной диод пентод	6,3	0,3	250	3,0	125	2,3	-3	1,1	730	650	-	2,5	-	6	0,005	9	2,6
17	6С3М	6С5	Триод	6,3	0,3	250	8,0	-	-	-8	2,0	20	10	10	2,5	0,25	3	2,0	11	3
18	6Г7	6Р7Б	Двойной диод-триод	6,3	0,3	250	1,1	-	-	-3	1,2	70	58	-	2	-	5	1,5	4,5	24
19	6Е5	6Е5	Электронный индикатор	6,3	0,3	250	0,1-5	-	-	-8(0)	0,8	20	25	1000	-	-	-	-	-	2,8
20	6Г5	6С2Б	Триод	6,3	0,3	250	9	-	-	-8	2,6	20	7,7	-	2,5	-	4,2	3,8	5	3
21	6Г6	6Н1П	Двойной триод миниатюр	6,3	0,45	150	3,0	-	-	-10	5,3	3,8	7,1	-	1,5	-	2,2	1,6	0,4	5
22	6Г7	6Ж7Б	Пентод В4	6,3	0,3	250	2	100	0,5	-3	1,2	1400	10	-	0,75	-	7	0,04	12	6
23	6Г7	6Ж7Б	Пентод В4 Варимю	6,3	0,3	250	7	100	1,7	-3	1,45	1200	800	-	2,25	0,2	7	0,04	12	6
24	6К8	6Д1	Триод-вакуум	6,3	0,3	250	2,5	100	6,0	-3	0,3	-	500	-	0,5	-	6	0,03	5	27
25	6К9М	6К9	Пентод В4 Варимю	6,3	0,3	250	9	100	2,6	-3	2,0	1600	800	-	0,5	-	6	0,005	11	8
26	6Н7С	6Н7	Двойной триод класса В	6,3	0,8	300	3,5	-	-	0	3,2	3,5	2,5	8	11	10	4,8	0,005	11	8
27	6П3	6П3	Лучевой тетрод	6,3	0,9	250	7,8	250	7	-14	6,1	130	21	2,5	20,5	6,5	7,0	4,0	8	9
28	6Р5	6С4Б	Триод	6,3	0,3	250	1	-	-	-2	1,6	100	63	-	0,4	0,06	2,2	2,8	3,2	23
29	6В6	6П2	Оконечный пентод	6,3	0,7	250	3,4	250	7	-16,5	2,5	200	80	7	10	3,2	8	0,5	6,5	9
30	6В6	6П2	Лучевой тетрод	6,3	0,45	250	4,5	250	4,5	-12,5	4,1	250	52	5	12	4,5	3,5	0,7	7,5	9
31	6А7	6А7Б	Генлок-преобразователь	6,3	0,3	250	3,5	100	8,5	0	0,45	-	1000	-	1	12,5	400	12,5	2,6	
32	6С17	6Ж17Б	Пентод В4	6,3	0,3	250	3,0	100	0,8	-3	1,65	2500	1500	-	2,5	-	6,0	0,005	7,0	13
33	6С17	6Ж17Б	Пентод В4	6,3	0,3	250	3,0	100	0,8	-3	1,65	2500	1500	-	2,5	-	6,0	0,005	7,0	13
34	6С17	6Н8	Двойной триод	6,3	0,3	250	10,8	150	4,1	-1	4,9	4400	900	-	1	-	8,5	0,005	7,0	12
35	6С17	6Н8	Двойной триод	6,3	0,3	250	23	-	-	-2	1,6	70	44	-	1	-	9,2	2,8	5,5	10
36	6С17	6К17Б	Пентод В4 Варимю	6,3	0,6	250	9	-	-	8	2,8	20	7,7	-	2,5	-	9,4	4	10,0	10
37	6С17	6Р17Б	Двойной диод триод	6,3	0,3	250	9,2	100	2,4	-3	2,0	1600	800	-	4	-	6	0,005	7	13
38	6С17	6Р17Б	Двойной диод триод	6,3	0,3	250	0,9	-	-	-2	1,1	100	90	-	2,5	-	3,2	1,6	3,0	14
39	6С17	6Н10	Двойной триод	6,3	0,3	250	9,5	-	-	-2	1,9	16	8,5	-	2,5	0,3	3,6	2,4	2,8	14
40	6Р6Т	6К12Б	Пентод В4 Варимю	6,3	0,3	250	11,8	125	4,4	-1	4,7	4200	900	-	3	-	2,2	2,0	3,0	16
41	6К6М	6К6	Двойной диод	6,3	0,3	125	4,7	-	-	-	-	-	-	-	3	-	8,5	0,005	7,0	12
42	6А7Г	6А10	Пентодриод с самовозбуждением	6,3	0,3	250	2,4	100	7,1	-3,0	0,35	-	1000	-	1	-	7,5	0,005	11,0	15
43	6Л7	6А3Б	Пентод-смеситель	6,3	0,3	250	2,4	100	6,5	-3	0,38	700	800	-	1,75	-	7,5	0,001	11,0	2,2
44	6С11	6Д1П	Генератор тока телевизион	6,3	1,8	44	-	-	-	200	+4,4	-	-	-	5	-	-	-	-	2,8
45	6С12	6Ж8	Пентод малогарнитный УВЧ	6,3	0,5	250	10	100	2,5	-2,4	7,5	15000	2000	-	2,5	-	9,5	0,03	6,25	8
46	6К6	6П1	Оконечный пентод	6,3	0,4	250	3,3	250	5,5	-8	2,3	160	70	-	8,5	3,4	-	-	-	9
47	6С6С	6П4	Оконечный пентод	6,3	0,3	180	1,5	180	2,5	-9	1,3	-	175	-	2,75	1,1	5,5	0,5	7,0	9
48	6А4С	6С6	Оконечный триод	6,3	1,0	250	6,0	-	-	-4,5	5,3	4,2	0,8	2,5	1,5	3,5	7,5	1,6	5,5	2
49	6А4С	6С6	Оконечный триод	6,3	0,3	100	3,5	-	-	-3	0,45	8	1,8	-	-	-	2,5	2,0	3,0	7
50	6А4С	6С17Т	Триод-пентод	6,3	0,3	250	6,5	100	1,5	-3	1,1	900	850	-	3,2	0,005	12,0	12,0	12	
51	2С40		Триод УКВ маячковый	6,3	0,75	250	16,5	-	-	-	4,8	35	1,5	-	6,5	0,035	-	-	-	2
52	2С43		Триод УКВ маячковый	6,3	0,9	300	2,6	-	-	-	9,0	4,5	5	-	-	-	-	-	-	2
53	12А6	12П6	Лучевой тетрод	12,6	0,15	250	3,0	250	3,5	-12,5	3	-	70	-	7,5	3,4	9	0,3	9	9
54	12А7-ГТ	12Н1	Двойной триод	12,6	0,15	180	7,6	-	-	-4,5	1,9	16	8,4	-	1,5	-	9	9	8	11
55	12А7-ГТ	12Н1	Пентод универсальный	12,6	0,15	250	3,0	250	3,5	-12,5	3	-	70	-	7,5	3,4	9	0,3	9	9
56	12С5-С1	12С2	Триод	12,6	0,075	210	2,0	75	0,55	-2,3	1,5	2000	1400	-	2,0	-	-	-	-	18
57	12С5Т	12Н10	Двойной триод	12,6	0,15	250	9,0	-	-	-8	2,6	20	7,7	-	2,5	-	3,4	3,4	3,6	3
58	12С5Т	12К12Б	Пентод В4 Варимю	12,6	0,15	250	2,0	-	-	-2	1,3	70	5,3	-	2,5	-	2,2	2,0	3,0	16
59	12С5Т	12Ж17Б	Пентод В4	12,6	0,15	250	9,2	150	3,4	-2,5	4,0	-	3000	-	3,0	-	6,5	0,005	7,0	12
60	12С5Т	12К17Б	Пентод В4 Варимю	12,6	0,15	250	3,0	100	0,8	-3	1,65	2300	1500	-	2,5	-	6,0	0,005	7,0	13
61	12С5Т	12Р17Б	Двойной диод-триод	12,6	0,15	250	9,2	100	2,6	-3	2,0	1600	800	-	4,0	-	6,0	0,005	7,0	13
62	12С5Т	12Р17Б	Двойной диод-триод	12,6	0,15	250	0,9	-	-	-2	1,1	100	91	-	-	-	3,2	1,6	3,0	14
63	12С5Т	12Р17Б	Триод генераторный ДЦВ	12,6	0,1	300	-	-	-	-9	1,9	1,6	4,5	-	2,5	0,3	3,			

ТАБЛИЦА ПРИЕМНОУСИЛИТЕЛЬНЫХ РАДИОЛАМП

№ п/п	Обозначение		Тип лампы	Накал		Анод		Экр сетка		Смес. частота	Кру. частота	Коз. усиления	Внут. сопр.	Внеш. сопр.	Мощн. ватт	Вых. частота	Емкости			Примечания		
	старое	новое		U _A	I _A	U _A	I _A	U _{с1}	I _{с1}								U _{с2}	I _{с2}	U _{с3}		I _{с3}	U _{с4}
1	954	6КЖХ	Пентод УВЧ (жолуь)	6,3	0,15	250	2	100	0,7	-3	1,4	1700	1200	-	-	12	-	3,4	4,07	3	29	
2	955	6СЖХ	Триод УВЧ (жолуь)	6,3	0,15	180	4,3	-	-	-3	2,0	2,3	12,3	20	1,5	0,13	10	4,4	4,6	4,6	30	
3	958	6КЖЕ	Пентод УВЧ Варимю (жолуь)	6,3	0,13	250	6,7	100	2,7	-3	1,8	1250	700	-	-	12	-	3,4	4,07	3	29	
4	9002	6СВЛ	Триод миниатюрный	6,3	0,15	90	2,5	-	-	-2,5	1,7	2,5	17,4	-	-	1,6	-	3,4	4,07	3	29	
5	9003	6К19П	Пентод Варимю миниат	6,3	0,15	250	6,7	100	2,7	-3	1,8	1400	700	-	-	1,7	-	3,4	4,07	3	29	
6	9004	6ДЖ	Диод УВЧ (жолуь)	6,3	0,15	117	0,8	-	-	-	50	800	-	-	-	-	-	-	-	-	1	
7		1А1П	Генлок-преобразователь	12	0,05	90	0,8	45	1,9	0	0,25	-	-	-	-	-	-	-	-	-	1	
8		1Б1П	Диод-пентод низкой частоты	12	0,06	90	0,8	-	-	0	0	-	-	-	-	-	-	-	-	-	1	
9		1К1П	Пентод ВЧ Варимю	12	0,06	90	0,8	45	1,9	0	0,25	-	-	-	-	-	-	-	-	-	1	
10		2П1П	Оконечный пентод	12	0,12	90	0,8	90	2,1	-4,5	2,15	270	100	10	-	0,27	-	-	-	-	31	
11	6А8	6А8Б	Генлок-преобразователь	6,3	0,3	250	3	100	2,7	-3	0,51	100	360	-	-	1,25	1,06	12,5	12,5	2,6	26	
12	6А8	6К155	Пентод УКВ Варимю	6,3	0,45	300	12,5	200	3,2	-3	5,0	3500	700	-	-	3,0	-	8,0	0,015	5,0	13	
13	6А8	6К14Б	Пентод УКВ	6,3	0,45	300	10	150	2,5	-2	9	9000	1000	-	-	3	-	11	6,005	5	13	
14	6А8	6АЖ	Пентод УКВ миниатюрный	6,3	0,3	250	7	150	2	-8	5	4000	800	-	-	2	-	6,5	0,025	1,8	4	
15	6А8	6Ж4Б	Телевизионный видео-пентод	6,3	0,65	300	30	150	7	-3	11	1430	130	-	-	9	30	13	0,06	7,5	12	
16	6В8	6В8Б	Двухноый диод пентод	6,3	0,3	250	8,0	125	2,3	-3	11	730	650	-	-	2,5	-	6	0,005	9	2,5	
17	6С3М	6С3	Триод	6,3	0,3	250	8,0	-	-	-8	2,0	20	10	10	2,5	0,25	3	2,0	11	2,4	24	
18	6Г7	6Г7Б	Двойной диод-триод	6,3	0,3	250	1,1	-	-	-3	1,2	70	58	-	-	2	-	3	1,5	4,5	2,5	
19	6Е5	6Е5	Электронный индикатор	6,3	0,3	250	0,1-5	-	-	-8(0)	0,8	20	25	1000	-	-	-	-	-	-	2,5	
20	6Г5	6С2Б	Триод	6,3	0,3	250	9	-	-	-8	2,6	20	77	-	-	2,5	-	4,2	3,8	5	3	
21	6Г6	6Н1П	Двойной триод миниатюр	6,3	0,45	150	3,0	-	-	-10	5,3	38	71	-	-	1,5	-	2,2	1,6	0,4	5	
22	6Г7	6Ж7Б	Пентод ВЧ	6,3	0,3	250	2	100	0,5	-3	1,2	1400	12	-	-	0,75	-	7	5,0	12	8	
23	6К7	6К7Б	Пентод ВЧ Варимю	6,3	0,3	250	7	100	1,7	-3	1,45	1200	800	-	-	2,25	0,2	7	6,0	12	8	
24	6К8	6Д1	Триод-вектор	6,3	0,3	250	2,5	100	6,0	-3	2,0	1600	800	-	-	0,8	-	6	0,03	5	27	
25	6К9М	6К9	Пентод ВЧ Варимю	6,3	0,3	250	9	100	2,6	-3	2,0	1600	800	-	-	0,8	-	6	0,03	5	27	
26	6Н7С	6Н7	Двойной триод класса В	6,3	0,8	300	35	-	-	0	3,2	35	23	8	-	1,1	-	4,8	6,0	11	8	
27	6П3	6П3	Лучевой тетрод	6,3	0,9	250	7,8	250	7	-14	6,1	130	21	2,5	-	10	-	2,4	5,4	21	9	
28	6П5	6С4Б	Триод	6,3	0,3	250	1	-	-	-2	1,6	100	63	-	-	0,4	0,06	2,2	2,8	3,2	23	
29	6П6С	6П2	Оконечный пентод	6,3	0,7	250	3,4	250	7	-16,5	2,5	200	80	7	10	3,2	8	0,5	0,5	9	9	
30	6П6	6П2	Лучевой тетрод	6,3	0,45	250	4,5	250	4,5	-12,5	4,1	250	52	5	12	4,5	9,5	0,7	7,5	9	9	
31	6А7	6А8Б	Генлок-преобразователь	6,3	0,3	250	3,5	100	8,5	0	0,45	-	1000	-	-	1	-	3,5	5,0	12	15	
32	6С17	6Ж17Б	Пентод ВЧ	6,3	0,3	250	3,0	100	0,8	-3	1,65	2500	1500	-	-	2,5	-	6,0	0,005	7,0	13	
33	6С17	6Ж11Б	Пентод ВЧ	6,3	0,3	250	10,8	150	4,1	-1	4,9	4400	900	-	-	3	-	8,5	0,005	7,0	12	
34	6С17	6Н9	Двойной триод	6,3	0,3	250	2,3	-	-	-2	1,6	70	44	-	-	1	-	3,2	2,8	1,5	10	
35	6С17	6Н8	Двойной триод	6,3	0,6	250	9	-	-	-8	2,6	2,0	7,7	-	-	2,5	-	4,4	4,0	10	10	
36	6С17	6К17Б	Пентод ВЧ Варимю	6,3	0,3	250	9,2	100	2,4	-3	2,0	1600	800	-	-	4	-	6	0,005	7	10	
37	6С17	6П17Б	Двойной диод триод	6,3	0,3	250	0,9	-	-	-2	1,1	100	90	-	-	2,5	-	3,2	1,6	3,0	14	
38	6С17	6П15Б	Двойной диод триод	6,3	0,3	250	0,9	-	-	-2	1,1	100	90	-	-	2,5	-	3,2	1,6	3,0	14	
39	6С17	6Н10	Двойной триод	6,3	0,3	250	2,0	-	-	-9	1,9	16	8,5	-	-	2,5	0,3	3,6	2,4	2,8	14	
40	6С17	6К12Б	Пентод ВЧ Варимю	6,3	0,3	250	11,8	125	4,4	-1	4,7	4200	900	-	-	3	-	2,2	2,0	3,0	16	
41	6К6М	6К6	Двойной диод	6,3	0,3	125	4	-	-	-	1,1	4,7	4200	900	-	-	3	-	5,5	0,005	7,0	12
42	6А7-СТ	6А10	Пентод с самовозбуждением	6,3	0,3	250	2,4	100	7,1	-30	0,35	-	1000	-	-	1	-	7,5	0,005	11,0	15	
43	6Л7	6А5Б	Генлок-смеситель	6,3	0,3	250	2,4	100	6,5	-3	0,38	700	800	-	-	1,75	-	7,5	0,005	11,0	15	
44	6С-111	6Д17П	Генератор тока телевизора	6,3	1,8	44	-	-	-	2,0(1)	4,4	-	-	-	-	5	-	1,5	0,001	11,0	22	
45	6С20	6Ж8	Пентод малобаритный УВЧ	6,3	0,5	250	10	100	2,5	-2,4	7,5	15000	2000	-	-	2,5	-	3,3	0,03	6,25	8	
46	6К6	6П1	Оконечный пентод	6,3	0,4	250	3,3	250	5,5	-8	2,3	160	70	-	-	8,5	3,4	8,5	3,4	9	9	
47	6С6-С	6П4	Оконечный пентод	6,3	0,3	180	15	180	2,5	-9	2,3	-	175	-	-	2,75	1,1	5,4	9,5	7,0	9	
48	6В4-С	6С6	Оконечный триод	6,3	1,0	250	6,0	-	-	-4,5	5,3	4,2	0,8	2,5	1,5	3,5	7,5	1,6	5,5	2	2	
49	6Т7	6С177	Триод-пентод	6,3	0,3	100	3,5	-	-	-3	0,45	8	18	-	-	2,5	-	2,0	3,0	7	7	
50			пентод	6,3	0,3	250	6,5	100	1,5	-3	1,1	900	850	-	-	3,2	0,005	12,0	12,0	12,0	12	
51	2С40		Триод УКВ маячковый	6,3	0,75	250	16,5	-	-	-	4,8	35	1,5	-	-	6,5	0,035	-	-	-	2	
52	2С43		Триод УКВ маячковый	6,3	0,9	300	2,6	-	-	-	9,0	4,5	5	-	-	-	-	-	-	-	2	
53	12А6	12П6	Лучевой тетрод	12,6	0,1	250	3,0	250	3,5	-12,5	3	-	70	-	-	7,5	3,4	9	0,3	9	9	
54	12А7-СТ	12Н1	Двойной триод	12,6	0,15	180	7,6	-	-	4,5	1,9	16	8,4	-	-	2,0	-	3	3	3	11	
55	12А7-200	12Ж1Л	Пентод универсальный	12,6	0,075	210	2,0	75	0,55	-2,3	1,5	2000	1400	-	-	2,0	-	2,0	-	-	16	
56	12С2	12С2	Триод	12,6	0,15	250	9,0	-	-	-8	2,6	20	7,7	-	-	2,5	-	3,4	3,4	3,6	3	
57	12С2	12Н10	Двойной триод	12,6	0,15	250	2,0	-	-	-2	1,3	70	5,3	-	-	2,5	-	3,4	3,4	3,6	3	
58	12С2	12К12Б	Пентод ВЧ Варимю	12,6	0,15	250	2,0	-	-	-2	1,3	70	5,3	-	-	2,5	-	3,4	3,4	3,6	3	
59	12С2	12Ж17Б	Пентод ВЧ	12,6	0,15	250	9,2	150	3,4	-2,5	4,0	-	1000	-	-	3,0	-	6,5	0,005	7,0	12	
60	12С2	12К17Б	Пентод ВЧ Варимю	12,6	0,15	250	3,0	100	0,8	-3	2,65	2500	1500	-	-	2,5	-	6,0	0,005	7,0	13	
61	12С2	12Р17Б	Двойной диод-триод	12,6	0,15	250	9,2	100	2,6	-3	2,0	1600	800	-	-	4,0	-	6,0				

ТАБЛИЦА ПРИЕМНОУСИЛИТЕЛЬНЫХ РАДИОЛАМП

№ п/п	Обозначение		Тип лампы	Накал		Анод		Экр. сетка		Кру. - Кр. - Коз.	Внут. сопр.	Сопр. напр.	Мощн. расщ. анод.	Вых. мощн.	Емкости			Примечания				
	старое	новое		Ц _г	J _г	Ц _а	J _а	Ц _с	J _с						Е _г	S	М		R _г	R _а	Р _г	Р _а
1	954	6Ж1Ж	Пентод 4В4 (жолты)	6,3	0,15	250	2	100	0,7	-3	1,4	1700	1200	-	12	-	3,4	4007	3	29		
2	955	6С1Ж	Триод 4В4 (жолты)	6,3	0,15	180	4,3	-	-	-3	2,0	2,5	12,3	20	1,5	0,13	1,0	4,4	0,6	3,0		
3	956	6К1Ж	Пентод 4В4 Варимю (жолты)	6,3	0,15	250	6,7	100	2,7	-3	1,8	1230	700	-	1,8	-	3,4	4007	3	29		
4	9002	6С8Л	Триод миниатюрный	6,3	0,16	90	2,5	-	-	-2,5	1,7	2,5	17,4	-	1,6	-	3,4	0,01	1,1	4,4	6	
5	9003	6К19П	Пентод Варимю миниат.	6,3	0,15	250	6,7	100	2,7	-3	1,8	1400	700	-	1,7	-	3,4	0,01	1,1	4,4	6	
6	9004	6Д1Ж	Диод 4В4 (жолты)	6,3	0,15	117	5,5	-	-	-	-	-	-	-	-	-	-	-	-	-	4	
7		1А1П	Генлок-преобразователь	1,2	0,05	90	0,8	4,5	1,9	0	0,25	-	-	-	-	-	-	-	-	-	1	
8		1Б1П	Диод-пентод низкой частоты	1,2	0,06	90	-	4,5	1,9	0	0,25	50	800	-	-	-	-	-	-	-	1	
9		1К1П	Пентод В4 Варимю	1,2	0,06	90	1,8	4,5	0,65	0	0,75	-	1000	-	-	-	-	-	-	-	1	
10		2Д1П	Оконечный пентод	1,2	0,12	90	9,5	90	2,1	-4,5	2,15	270	100	10	-	0,27	-	-	-	-	31	
11	6A8	6A85	Генлок-преобразователь	6,3	0,3	250	3	100	2,7	-3	0,31	100	360	-	1	-	12,5	4004	12,5	5	26	
12	6A87	6K155	Пентод УКВ Варимю	6,3	0,45	300	12,5	200	3,2	-3	0,30	3500	700	-	3	-	8,0	0,015	5,0	13		
13	6A87	6K176	Пентод УКВ	6,3	0,45	300	10	150	2,5	-2	9	9000	1000	-	3	-	11	0,008	5	13		
14	6A87	6AЖ5	Пентод УКВ миниатюрный	6,3	0,3	250	7	150	2	-8	5	4000	800	-	2	-	6,5	0,025	1,8	4		
15	6A87	6Ж45	Телевизионный видео-пентод	6,3	0,65	300	30	150	7	-3	11	1430	130	-	9	3,0	13	0,06	7,5	12		
16	6B6	6B6B	Двойной диод пентод	6,3	0,3	250	3,0	12,5	2,3	-3	1,1	730	650	-	2,5	-	6	0,005	9	2,6		
17	6С5М	6С5	Триод	6,3	0,3	250	8,0	-	-	-8	2,0	2,0	10	10	2,5	0,25	3	2,0	1,1	4,4		
18	6Г7	6Р7Б	Двойной диод-триод	6,3	0,3	250	1,1	-	-	-3	1,2	70	38	-	2	-	1,5	4,5	2,4	5	24	
19	6Е5	6Е5	Электронный индикатор	6,3	0,3	250	0,1-5	-	-	-8(0)	0,8	20	2,5	1000	-	-	-	-	-	-	2,9	
20	6J5	6С2Б	Триод	6,3	0,3	250	9	-	-	-8	2,6	20	7,7	-	2,5	-	4,2	3,0	5	3		
21	6J6	6Н1П	Двойной триод миниатюр	6,3	0,45	150	3,0	-	-	-10	5,3	38	11	-	1,5	-	2,2	1,6	0,4	5	3	
22	6J7	6Ж7Б	Пентод В4	6,3	0,3	250	2	100	0,5	-3	1,2	1400	12	-	0,75	-	1,6	0,4	5	3		
23	6K7	6K7Б	Пентод В4 Варимю	6,3	0,3	250	7	100	1,7	-3	1,45	1200	800	-	2,25	0,2	7	0,005	12	8		
24	6K8	6Д1	Триод-сексоид	6,3	0,3	250	2,5	100	6,0	-3	0,3	-	500	-	0,5	-	6	0,03	5	2,7		
25	6K9M	6K9	Пентод В4 Варимю	6,3	0,3	250	9	100	2,6	-3	2,0	1600	800	-	0,5	-	6	0,03	5	2,7		
26	6H7C	6H7	Двойной триод класса В	6,3	0,8	300	3,5	-	-	0	3,2	3500	800	-	1,4	-	4,8	0,005	11	8	21	
27	6П3	6П3	Лучевой тетрод	6,3	0,9	250	7,8	250	7	-1,4	6,1	130	21	2,5	1,4	10	4,3	2,4	1,5	4	21	
28	6P8	6С4Б	Триод	6,3	0,3	250	1	-	-	-2	1,6	130	21	-	20,5	6,5	7,0	6,0	8	9		
29	6P8C	6П6	Оконечный пентод	6,3	0,7	250	3,4	250	7	-16,5	2,5	100	63	-	0,4	0,06	2,2	2,8	1,3	2,3		
30	6V6	6П2	Лучевой тетрод	6,3	0,45	250	4,5	250	4,5	-12,3	4,1	250	52	5	12	4,5	3,5	0,7	7,5	9		
31	6X7	6A1B5	Генлок-преобразователь	6,3	0,3	250	3,5	100	8,5	0	0,45	-	1000	-	1	-	9,5	5,0	1,2	15		
32	6X7	6Ж17Б	Пентод В4	6,3	0,3	250	3,0	100	0,8	-3	1,65	2500	1500	-	2,5	-	6,0	0,005	7,0	13		
33	6SH7	6Ж11Б	Пентод В4	6,3	0,3	250	3,0	100	0,8	-3	1,65	2500	1500	-	2,5	-	6,0	0,005	7,0	13		
34	6SL7	6H9	Двойной триод	6,3	0,3	250	10,8	150	4,1	-1	4,9	4400	900	-	3	-	8,5	0,003	7,0	12		
35	6SN7	6H8	Двойной триод	6,3	0,3	250	2,3	-	-	-2,4	1,6	70	4,4	-	1	-	3,2	2,8	3,5	10		
36	6SK7	6K17Б	Пентод В4 Варимю	6,3	0,6	250	9	-	-	-8	2,6	2,0	7,7	-	2,5	-	9,4	4,4	1,0	10		
37	6SQ7	6P17Б	Двойной диод триод	6,3	0,3	250	9,2	100	2,4	-3	2,0	1600	800	-	4	-	6	0,003	7	13		
38	6SR7	6P15Б	Двойной диод триод	6,3	0,3	250	9,9	-	-	-2	1,1	100	90	-	2,5	-	3,2	1,6	3,0	14		
39	6SQ7	6H10	Двойной триод	6,3	0,3	250	9,5	-	-	-9	1,9	16	8,5	-	2,5	0,3	3,6	2,4	2,8	14		
40	6SQ7	6K12Б	Пентод В4 Варимю	6,3	0,3	250	20	-	-	-2	1,4	70	50	-	2,2	-	2,0	3,0	16			
41	6X6M	6X6	Двойной диод	6,3	0,3	125	4,4	-	-	-1	4,7	4200	900	-	3	-	8,5	0,003	7,0	12		
42	6SA7G	6A10	Пентод с самовозбуждением	6,3	0,3	250	2,4	100	7,1	-3,0	0,35	-	1000	-	1	-	0,02	-	-	19		
43	6L7	6A5B	Генлок-смеситель	6,3	0,3	250	2,4	100	6,5	-3	0,38	700	800	-	1,75	-	7,5	0,005	11,0	15		
44	6Y-111	6D17	Генератор тока телевизора	6,3	1,8	440	-	200	-	-	-	-	-	-	5	-	7,5	0,001	13,0	22		
45	7620	6Ж8	Пентод малобаритный 4В4	6,3	0,5	250	10	100	2,5	-2,4	7,5	1500	2000	-	2,5	-	9,3	0,03	6,25	8		
46	6K6	6П7	Оконечный пентод	6,3	0,4	250	3,3	250	5,5	-2,3	1,60	70	-	-	-	-	8,5	3,4	-	8		
47	6С6С	6П4	Оконечный пентод	6,3	0,3	180	1,5	120	2,5	-9	2,3	-	175	-	-	-	8,5	1,1	5,5	9,5	7,0	9
48	6B4-C	6С6	Оконечный триод	6,3	1,0	250	6,0	-	-	-4,5	3,3	42	0,8	2,5	1,5	3,5	7,5	1,6	5,5	2		
49	6F7	6С177	Триод-пентод	6,3	0,3	100	3,5	-	-	-3	0,45	8	1,8	-	-	-	2,6	2,0	3,0	7		
50			пентод - 250	6,3	0,3	100	3,5	-	-	-3	1,1	900	850	-	-	-	3,2	0,003	12,0	12		
51	2С40		Триод УКВ маячковый	6,3	0,15	250	16,5	-	-	-	4,8	35	7,5	-	6,5	0,035	-	-	-	-	2	
52	2С43		Триод УКВ маячковый	6,3	0,9	300	2,6	-	-	-	9,0	4,5	5	-	-	-	-	-	-	-	2	
53	12A6	12П6	Лучевой тетрод	12,6	0,15	250	3,0	250	3,5	-12,5	3	-	70	-	7,5	3,4	9	0,3	9	9		
54	12A7-GT	12Н1	Двойной триод	12,6	0,15	180	7,6	-	-	-6,5	1,9	16	8,4	-	1,5	-	3	3	8	11		
55	12AR2000	12Ж11	Пентод универсальный	12,6	0,15	180	7,6	-	-	-6,5	1,9	16	8,4	-	1,5	-	3	3	8	11		
56	12C5-GT	12С2	Триод	12,6	0,15	250	2,0	7,5	0,55	-2,3	1,5	2000	1400	-	2,0	-	2,0	-	-	18		
57	12С67	12Н10	Двойной триод	12,6	0,15	250	9,0	-	-	-8	2,6	20	7,7	-	2,5	-	3,4	3,4	3,6	3		
58	12С67	12К12Б	Пентод В4 Варимю	12,6	0,15	250	2,0	-	-	-2	1,3	70	5,3	-	2,5	-	3,4	2,0	3,0	16		
59	12С77	12Ж17Б	Пентод В4	12,6	0,15	250	9,2	150	3,4	-2,5	4,0	-	1000	-	3,0	-	0,5	0,003	7,0	12		
60	12SK7	12К17Б	Пентод В4 Варимю	12,6	0,15	250	3,0	100	0,8	-3	1,65	2500	1500	-	2,5	-	6,0	0,003	7,0	13		
61	12SQ7	12P17Б	Двойной диод-триод	12,6	0,15	250	9,2	100	2,6	-3	2,0	1600	800	-	4,0	-	6,0	0,003	7,0	13		

ТАБЛИЦА ПРИЕМНОУСИЛИТЕЛЬНЫХ РАДИОЛАМП

№ п/п	Обозначение		Тип лампы	Накал		Анод		Экр. сетка		Смещение	Крутизна	Кол-во	Внутр. сопр.	Сопр. напр.	Мощность	Вых. мощ.	Емкости			Примечания	
	старое	новое		U _г	I _г	U _а	I _а	U _с	I _с								E _с	S	M		R _в
				V	A	V	mA	V	mA	V	mA	кΩ	кΩ	кΩ	W	W	pF	pF	pF		
1	854	6К1Ж	Пентод УВЧ (жюльб)	6,3	0,75	250	2	100	0,7	-3	14	1700	1200	-	12	-	34	5007	5	29	
2	955	6С1Ж	Триод УВЧ (жюльб)	6,3	0,75	180	4,3	-	-	-5	20	25	12,5	20	15	0,75	10	44	96	30	
3	958	6К1Ж	Пентод УВЧ Бариню (жюльб)	6,3	0,75	250	6,7	100	2,7	-3	5	1250	700	-	12	-	34	5007	8	28	
4	9002	6С8Л	Триод миниатюрный	6,3	0,18	90	2,5	-	-	-2,5	4,7	25	174	-	16	-	12	1,1	14	6	
5	9003	6К19П	Пентод Бариню миниат.	6,3	0,18	250	6,7	100	2,7	-3	1,8	1400	700	-	17	-	34	5007	3	4	
6	9004	6Д1Ж	Диод УВЧ (жюльб)	6,3	0,15	117	3,5	-	-	-	-	-	-	-	-	-	-	-	-	-	1
7		1А1П	Генер.-преобразователь	1,2	0,06	90	0,8	45	1,9	0	0,25	-	800	-	-	-	-	-	-	-	-
8		1Б1П	Диод-пентод низкой частоты	1,2	0,06	90	0,8	45	1,9	0	0,25	-	800	-	-	-	-	-	-	-	-
9		1К1П	Пентод ВЧ Бариню	1,2	0,06	90	0,8	45	1,9	0	0,25	-	800	-	-	-	-	-	-	-	-
10		2Л1П	Оконечный пентод	1,2	0,12	90	2,5	90	2,1	-4,5	2,5	270	100	10	0,27	-	-	-	-	-	31
11	6А8В	6А8В	Генер.-преобразователь	6,3	0,3	250	3	100	2,7	-3	0,51	100	360	-	1	-	12,5	5006	12,5	26	
12	6А8В7	6К155	Пентод УКВ Бариню	6,3	0,45	300	12,5	200	3,2	-3	5,0	3500	700	-	3	-	8,0	6005	5,0	13	
13	6А8В7	6М146	Пентод УКВ	6,3	0,45	300	10	150	2,5	-2	9	9000	1000	-	3	-	11	5008	5	13	
14	6А8С5	6АЖ5	Пентод УКВ миниатюрный	6,3	0,3	230	7	150	2	-8	5	4000	800	-	2	-	6,5	0,025	1,8	4	
15	6А8С7	6Ж4С	Телевизионный видео-пентод	6,3	0,65	300	30	150	7	-3	11	1430	130	-	9	3,0	13	0,06	7,5	12	
16	6В6	6В6	Двойной диод пентод	6,3	0,3	250	3,0	125	2,3	-3	1,1	730	650	-	2,5	-	6	0,005	9	26	
17	6С5М	6С5	Триод	6,3	0,3	250	8,0	-	-	-8	2,0	20	10	10	2,5	0,25	3	2,0	11	3	
18	6Г7	6Р7Б	Двойной диод-триод	6,3	0,3	250	1,1	-	-	-3	1,2	70	58	-	2	-	1,5	4,5	24	24	
19	6Е5	6Е5	Электронный индикатор	6,3	0,3	250	0,1-5	-	-	-8(0)	0,8	20	25	1000	-	-	-	-	-	-	25
20	6Е5	6С2Б	Триод	6,3	0,3	250	9	-	-	-8	2,6	20	77	-	-	-	-	-	-	-	
21	6Г6	6М1П	Двойной триод миниатюр.	6,3	0,45	150	3,0	100	0,5	-3	5,3	38	71	-	2,5	-	4,2	3,8	5	3	
22	6Г7	6Ж7Б	Пентод ВЧ	6,3	0,3	250	2	100	0,5	-3	1,2	1400	12	-	1,5	-	2,2	1,6	10,4	5	
23	6К7	6К7Б	Пентод ВЧ Бариню	6,3	0,3	250	7	100	1,7	-3	1,45	1200	800	-	2,25	0,2	7	5,0	12	8	
24	6К8	6Д1	Триод-вакуум.	6,3	0,3	250	2,5	100	2,0	-3	0,3	-	500	-	0,5	-	6	0,03	5	27	
25	6К9М	6К9	Пентод ВЧ Бариню	6,3	0,3	250	9	100	2,6	-3	2,0	1600	800	-	0,5	-	4,8	0,025	11	8	
26	6Н7С	6Н7	Двойной триод класса В	6,3	0,8	300	35	100	0,4	0	3,2	35	23	8	11	10	4,3	2,4	5,4	21	
27	6П5	6П5	Лучевой тетрод	6,3	0,9	250	7,8	250	7	-14	6,1	130	21	-	20,5	6,5	7,0	4,0	8	9	
28	6П5	6С4Б	Триод	6,3	0,3	250	1	-	-	-2	1,6	100	63	-	0,4	0,06	2,2	2,8	3,2	23	
29	6П6	6П2	Оконечный пентод	6,3	0,7	250	34	250	7	-16,5	2,5	200	80	7	10	3,2	8	0,5	6,5	9	
30	6П6	6П2	Лучевой тетрод	6,3	0,45	250	4,5	250	4,5	-12,5	4,1	250	52	5	12	4,5	9,5	0,7	7,5	9	
31	6С17	6Ж7Б	Генер.-преобразователь	6,3	0,3	250	3,5	100	8,5	0	0,45	-	1000	-	1	-	9,5	5,0	12	15	
32	6С17	6Ж7Б	Пентод ВЧ	6,3	0,3	250	3,0	100	0,8	-3	1,65	2500	1500	-	2,5	-	6,0	0,005	7,0	13	
33	6С17	6Ж7Б	Пентод ВЧ	6,3	0,3	250	3,0	100	0,8	-3	1,65	2500	1500	-	2,5	-	6,0	0,005	7,0	13	
34	6С17	6Н9	Двойной триод	6,3	0,3	250	10,8	150	4,1	-1	4,9	4400	900	-	3	-	8,5	0,003	7,0	12	
35	6С17	6Н8	Двойной триод	6,3	0,3	250	23	-	-	-2	1,6	70	44	-	1	-	8,5	0,003	7,0	12	
36	6С17	6К7Б	Пентод ВЧ Бариню	6,3	0,6	250	9	100	2,6	-8	2,6	20	77	-	2,5	-	3,4	4,8	1,0	10	
37	6С17	6Р7Б	Двойной диод-триод	6,3	0,3	250	9,2	100	2,4	-3	2,0	1600	800	-	4	-	6	0,003	7	13	
38	6С17	6Р7Б	Двойной диод-триод	6,3	0,3	250	0,9	-	-	-2	1,1	100	90	-	2,5	-	3,2	1,6	3,0	14	
39	6С17	6Н10	Двойной триод	6,3	0,3	250	20	-	-	-9	1,9	16	8,5	-	2,5	0,3	3,6	2,4	2,8	14	
40	6С17	6К12Б	Пентод ВЧ Бариню	6,3	0,3	250	11,8	125	4,4	-1	4,7	4200	900	-	3	-	2,2	2,0	3,0	16	
41	6Х6М	6Х6	Двойной диод	6,3	0,3	125	4,4	-	-	-1	4,7	4200	900	-	3	-	8,5	0,003	7,0	12	
42	6Х6М	6А10	Пентод с самовозбуждением	6,3	0,3	250	24	100	7,1	-3,0	0,35	-	1000	-	1	-	7,5	0,005	11,0	15	
43	6Л7	6А5Б	Генер.-смеситель	6,3	0,3	250	24	100	6,5	-3	0,38	700	800	-	1,75	-	7,5	0,001	11,0	22	
44	6С-111	6Д1П	Генератор тока телевизора	6,3	1,8	44	-	-	-	2000	+44	-	-	-	5	-	-	-	-	-	2,8
45	6С6С	6ЖВ	Пентод маловысокой УВЧ	6,3	0,5	250	10	100	2,5	-24	7,5	15000	2000	-	2,5	-	3,5	0,03	6,25	8	
46	6С6С	6П1	Оконечный пентод	6,3	0,4	250	3,3	250	5,5	-8	2,3	160	70	-	8,5	3,4	-	-	-	9	
47	6С6С	6П4	Оконечный пентод	6,3	0,3	180	15	180	2,5	-9	2,3	-	175	-	2,75	11	5,5	0,5	7,0	9	
48	6С6С	6С6	Оконечный триод	6,3	1,0	250	60	-	-	-45	5,3	42	0,8	2,5	15	3,5	7,5	1,6	5,5	2	
49	6С6С	6С17	Триод-пентод	6,3	0,3	100	3,5	-	-	-3	0,45	8	18	-	-	-	2,6	2,0	3,0	7	
50			пентод	6,3	0,3	250	6,5	100	1,5	-3	1,1	900	650	-	-	-	3,2	0,003	12,0	12	
51	2С40		Триод УКВ маячковый	6,3	0,75	250	16,5	-	-	-	4,8	35	5	-	6,5	0,035	-	-	-	-	
52	2С43		Триод УКВ маячковый	6,3	0,9	300	2,6	-	-	-	8,0	45	5	-	-	-	-	-	-	-	
53	12А6	12П6	Лучевой тетрод	12,6	0,15	250	30	250	3,5	-12,5	3	-	70	-	7,5	3,4	9	0,3	9	9	
54	12АК7-61	12Н1	Двойной триод	12,6	0,15	250	30	250	3,5	-12,5	3	-	70	-	7,5	3,4	9	0,3	9	9	
55	12АК12004	12К1П	Пентод универсальный	12,6	0,15	180	7,6	-	-	-6,5	1,9	16	24	-	1,5	-	3	3	8	11	
56	12С5-61	12С2	Триод	12,6	0,075	210	2,0	75	0,55	-2,3	1,5	2000	1400	-	2,0	-	-	-	-	18	
57	12С67	12Н10	Двойной триод	12,6	0,15	250	9,0	-	-	-8	2,6	20	7,7	-	2,5	-	3,4	3,4	3,6	3	
58	12С67	12К12Б	Пентод ВЧ Бариню	12,6	0,15	250	2,0	-	-	-2	1,3	70	5,3	-	3,0	-	8,2	2,0	5,0	16	
59	12С17	12К17Б	Пентод ВЧ	12,6	0,15	250	9,2	150	3,4	-2,5	4,0	-	1000	-	3,0	-	6,5	0,003	7,0	12	
60	12С17	12К17Б	Пентод ВЧ Бариню	12,6	0,15	250	9,2	100	2,6	-3	2,0	1600	800	-	2,5	-	6,0	0,003	7,0	13	
61	12С17	12Р7Б	Двойной диод-триод	12,6	0,15	250	9,9	-	-	-2	1,7	100	91	-	4,0	-	6,0	0,003			

Enclosure

ТАБЛИЦА ПРИЕМНОУСИЛИТЕЛЬНЫХ РАДИОЛАМП

№ п/п	Обозначение		Тип лампы	Накал		Анод		Экр. сетка		Сме-Кру	Коз	Внут. сопр.	Сопр. напр.	Мощн. расч. напр.	Вых. мощн.	Емкости			Примечания		
	старое	новое		U _г	I _г	U _а	I _а	U _с	I _с							E _г	S	г		R _г	R _а
1	954	6КЖ	Пентод 2В4 (желез)	6,3	0,15	250	2	100	0,7	-3	1,4	1700	4200	-	12	-	3,4	4007	3	2,9	
2	955	6СЖ	Триод 2В4 (желез)	6,3	0,15	180	4,3	-	-	-3	2,0	25	12,5	20	1,5	0,13	1,0	4,4	4,6	3,0	
3	958	6КЖ	Пентод 2В4 Варимю (желез)	6,3	0,15	250	6,7	100	2,7	-3	1,8	1250	700	-	12	-	3,4	4007	3	2,9	
4	9002	6СВ1П	Триод миниатюрный	6,3	0,15	90	2,5	-	-	-2,5	1,7	25	174	-	1,6	-	1,2	1,1	1,4	6	
5	9003	6К19П	Пентод Варимю миниат.	6,3	0,15	250	6,7	100	2,7	-3	1,8	1400	700	-	1,7	-	3,4	4007	3	4	
6	9004	6ДЖ	Диод 2В4 (желез)	6,3	0,15	117	3,5	-	-	-	-	-	-	-	-	-	-	-	-	1	
7		1А1П	Гелтод-преобразователь	1,2	0,06	90	0,8	45	1,9	0	0,25	-	800	-	-	-	-	-	-	1	
8		1Б1П	Диод-пентод низкой частоты	1,2	0,06	90	0,8	45	1,9	0	0	150	1000	-	-	-	-	-	-	1	
9		1К1П	Пентод В4 Варимю	1,2	0,06	90	1,8	45	0,65	0	0,75	-	800	-	-	-	-	-	-	1	
10		2П1П	Оконечный пентод	1,2	0,12	90	9,5	90	2,1	-4,5	2,9	270	100	10	0,27	-	-	-	-	31	
11	6A8	6A8B	Гелтод-преобразователь	6,3	0,3	250	3	100	2,7	-3	0,51	100	360	-	1	12,5	4006	12,5	2,6		
12	6A87	6К150	Пентод УКВ Варимю	6,3	0,45	300	12,5	200	3,2	-3	5,0	3500	700	-	3	-	8,0	4005	5,0	13	
13	6A87	6К146	Пентод УКВ	6,3	0,45	300	10	150	2,5	-2	9	9000	1000	-	3	-	11	4005	5	13	
14	6A85	6Ж15	Пентод УКВ миниатюрный	6,3	0,3	250	7	150	2	-8	5	4000	800	-	2	-	4,5	4005	4,5	4	
15	6A87	6Ж15	Телевизионный видео-пентод	6,3	0,65	300	30	150	7	-3	11	1430	130	-	9	3,0	13	406	3,5	12	
16	6B8	6B8B	Двойной диод пентод	6,3	0,3	250	8,0	12,5	2,3	-3	1,1	730	650	-	2,5	-	8	4005	8	2,6	
17	6С3М	6С5	Триод	6,3	0,3	250	8,0	-	-	-8	2,0	20	10	10	2,5	9,25	3	2,0	11	2,6	
18	6Г7	6Р7Б	Двойной диод-триод	6,3	0,3	250	1,1	-	-	-3	1,2	70	58	-	2	-	5	1,5	4,5	2,4	
19	6Е5	6Е5	Электронный индикатор	6,3	0,3	250	0,1-5	-	-	-8(0)	0,8	20	25	1000	-	-	-	-	-	2,3	
20	6Г5	6С2Б	Триод	6,3	0,3	250	9	-	-	-8	2,6	20	7,7	-	2,5	-	-	-	-	2,9	
21	6Г6	6Н1П	Двойной триод миниатюр	6,3	0,45	150	3,0	-	-	-7,0	5,3	38	7,1	-	1,5	-	4,2	3,8	5	3	
22	6Г7	6Ж7Б	Пентод В4	6,3	0,3	250	2	100	0,5	-3	1,2	1400	12	-	0,75	-	2,2	1,6	0,4	5	
23	6К7	6К7Б	Пентод В4 Варимю	6,3	0,3	250	7	100	1,7	-3	1,2	1400	12	-	0,75	-	7	2,0	12	8	
24	6К8	6Д1	Триод-вакуум	6,3	0,3	250	2,5	100	2,6	-3	1,45	1200	800	-	2,25	9,2	7	4,0	12	8	
25	6К9М	6К9	Пентод В4 Варимю	6,3	0,3	250	3	100	6,0	-3	0,3	-	500	-	0,8	-	6	0,03	5	27	
26	6Н7С	6Н7	Двойной триод класса В	6,3	0,8	300	3,5	100	2,6	-3	0,1	3,2	1600	800	-	0,8	-	4,8	4,0	11	8
27	6П3	6П3	Лучевой тетрод	6,3	0,9	250	7,8	250	7	-14	6,1	130	21	2,5	1,1	10,1	4,3	2,4	5,4	21	
28	6П5	6С4Б	Триод	6,3	0,3	250	1	-	-	-2	1,6	100	63	-	0,4	0,06	2,2	2,8	3,2	23	
29	6P8C	6П2	Оконечный пентод	6,3	0,7	250	3,4	250	7	-16,5	2,5	200	80	7	10	3,2	8	0,5	0,5	9	
30	6V6	6П2	Лучевой тетрод	6,3	0,45	250	4,5	250	4,5	-12,5	4,1	250	52	5	12	4,5	9,5	0,7	7,5	9	
31	6X7	6A1B5	Гелтод-преобразователь	6,3	0,5	250	3,5	100	8,5	0	0,43	-	1000	-	1	-	9,5	2,0	1,2	15	
32	6X7	6Ж7Б	Пентод В4	6,3	0,3	250	3,0	100	0,8	-3	1,65	2500	1500	-	2,5	-	6,0	0,005	7,0	13	
33	6SH7	6К116	Пентод В4	6,3	0,3	250	3,0	100	0,8	-3	1,65	2500	1500	-	2,5	-	6,0	0,005	7,0	13	
34	6SL7	6Н9	Двойной триод	6,3	0,3	250	10,8	150	4,1	-1	4,9	4400	900	-	3	-	8,5	0,003	7,0	12	
35	6SL7	6Н8	Двойной триод	6,3	0,3	250	23	-	-	-2	1,8	70	44	-	1	-	8,5	0,003	7,0	12	
36	6SK7	6К17Б	Пентод В4 Варимю	6,3	0,6	250	9	-	-	-8	2,6	20	7,7	-	2,5	-	3,9	4,7	1,0	10	
37	6SQ7	6Р7Б	Двойной диод-триод	6,3	0,3	250	9,2	100	2,4	-3	2,0	1600	800	-	4	-	6	0,003	7	13	
38	6SR7	6Р7Б	Двойной диод-триод	6,3	0,3	250	9,9	-	-	-2	1,1	100	90	-	2,5	-	3,2	1,6	3,0	14	
39	6SC7	6Н10	Двойной триод	6,3	0,3	250	9,5	-	-	-9	1,9	16	8,5	-	2,5	0,3	3,6	2,4	2,8	14	
40	6SE7	6К12Б	Пентод В4 Варимю	6,3	0,3	250	11,8	12,5	4,4	-2	1,4	70	50	-	2,2	-	2,2	2,0	3,0	16	
41	6X6M	6Х6	Двойной диод	6,3	0,3	125	4	-	-	-1	4,7	4200	900	-	3	-	8,5	0,003	7,0	12	
42	6SA7CT	6A10	Пентод триод с самовозбуждением	6,3	0,3	250	2,4	100	7,1	-3,0	0,35	-	1000	-	1	-	7,5	0,005	11,0	15	
43	6L7	6A5B	Гелтод-смеситель	6,3	0,3	250	2,4	100	6,5	-3	0,38	700	800	-	1,75	-	7,5	0,001	11,0	22	
44	6E3-7M	6Д1П	Генератор тока телевизиион	6,3	1,8	44	-	-	-	-200	4,4	-	-	-	5	-	-	-	-	-	
45	7620	6ЖВ	Пентод малобаритный 2В4	6,3	0,5	250	10	100	2,5	-2,4	7,5	15000	2000	-	2,5	-	9,5	0,03	6,25	8	
46	6K6	6П1	Оконечный пентод	6,3	0,4	250	3,3	250	5,5	-8	2,3	160	70	-	8,5	3,4	-	-	-	9	
47	6С6-С	6П4	Оконечный пентод	6,3	0,3	180	1,5	180	2,5	-9	2,3	-	175	-	2,75	1,1	5,8	0,5	7,0	9	
48	6B4-С	6С6	Оконечный триод	6,3	1,0	250	6,0	-	-	-4,5	5,3	4,2	0,8	2,5	1,5	3,5	7,5	1,6	5,5	2	
49	6F7	6С17	Триод-пентод	6,3	0,3	100	3,5	-	-	-3	0,45	8	18	-	-	-	2,5	2,0	3,0	7	
50			пентод	2,50	6,5	100	1,5	-3	1,1	900	850	-	-	-	-	-	3,2	4008	12,0	2	
51	2C40		Триод УКВ маячковый	6,3	0,75	250	16,5	-	-	-	4,2	35	7,5	-	6,5	0,035	-	-	-	2	
52	2C43		Триод УКВ маячковый	6,3	0,9	300	2,6	-	-	-	9,0	4,5	5	-	-	-	-	-	-	2	
53	12A6	12П6	Лучевой тетрод	12,6	0,2	250	3,0	250	3,5	-12,5	3	-	70	-	7,5	3,4	9	0,3	9	9	
54	12A7-CT	12Н1	Двойной триод	12,6	0,15	180	7,6	-	-	-6,5	1,9	16	8,4	-	7,5	-	9	9	9	11	
55	12A7-CT	12Н1Л	Пентод универсальный	12,6	0,15	210	2,0	7,5	0,53	-2,3	1,5	2000	1400	-	2,0	-	-	-	-	18	
56	12A7-CT	12С2	Триод	12,6	0,15	250	9,0	-	-	-2	2,6	20	7,7	-	2,5	-	3,4	3,4	3,6	3	
57	12A7-CT	12Н10	Двойной триод	12,6	0,15	250	2,0	-	-	-2	1,3	70	5,3	-	2,2	-	2,0	3,0	3,0	16	
58	12A7-CT	12К12Б	Пентод В4 Варимю	12,6	0,15	250	2,0	-	-	-2,5	4,0	-	1000	-	3,0	-	0,5	0,003	7,0	12	
59	12A7-CT	12К17Б	Пентод В4	12,6	0,15	250	9,2	150	3,4	-2,5	4,0	-	2500	1500	-	2,5	-	6,0	0,005	7,0	13
60	12A7-CT	12К17Б	Пентод В4 Варимю	12,6	0,15	250	9,2	100	9,8	-3	1,65	2500	1500	-	2,5	-	6,0	0,005	7,0	13	
61	12A7-CT	12Р17Б	Двойной диод-триод	12,6	0,15	250	9,9	-	-	-3	2,0	1600	800	-	4,0	-	6,0	0,003	7,0	13	
62	12A7-CT	12Р18	Двойной диод-триод	12,6	0,15	250	9,5	-	-	-2	1,1	100	9,1	-	-	-	3,2	1,6	3,0	14	
63	12B-1		Триод генераторный ДЦВ	12,6	0,1	300	-	-	-	-9	1,9	1,6	8,5	-	2,6	0,3	3,6</				

ТАБЛИЦА ПРИЕМНОУСИЛИТЕЛЬНЫХ РАДИОЛАМП

№ п/п	Обозначение		Тип лампы	Накал		Анод		Экр. сетка		Смес.	Кру.	Коз.	Внут. сопр.	Сопр. напр.	Мощн. расч. инд.	Вых. мощн.	Емкости			Примечания		
	старое	новое		U _г	I _г	U _а	I _а	U _с	I _с								U _з	I _з	U _с		I _с	U _п
1	954	6К1Ж	Пентод 4В4 (жгульб)	6,3	0,75	250	2	100	0,7	-3	1,4	1700	1200	-	12	-	3,4	500	3	2,9		
2	955	6С1Ж	Триод 4В4 (жгульб)	6,3	0,75	180	4,3	-	-	-5	2,0	25	12,5	20	1,5	0,75	1,0	1,4	1,4	1,4	3,0	
3	958	6К1Ж	Пентод 4В4 Варимю (жгульб)	6,3	0,75	250	6,7	100	2,7	-3	1,8	1750	700	-	12	-	3,4	500	3	2,9		
4	9002	6С8П	Триод миниатюрный	6,3	0,16	90	2,5	-	-	-2,5	1,7	25	174	-	1,6	-	1,2	1,1	1,4	1,4	6	
5	9003	6К19П	Пентод Варимю миниат.	6,3	0,15	250	6,7	100	2,7	-3	1,8	1400	700	-	1,7	-	3,4	500	3	4		
6	9004	6Д1Ж	Двуд. 4В4 (жгульб)	6,3	0,15	117	5,4	-	-	-	-	-	-	-	-	-	-	-	-	-	1	
7		1А1П	Гелтод-преобразователь	1,2	0,06	90	0,8	45	1,9	0	0,25	-	800	-	-	-	-	-	-	-	4	
8		1Б1П	Двуд. пентод низкой частоты	1,2	0,06	90	0,8	45	1,9	0	0	50	1000	-	-	-	-	-	-	-	7	
9		1К1П	Пентод 6Ч Варимю	1,2	0,06	90	1,8	45	0,65	0	0,75	-	800	-	-	-	-	-	-	-	31	
10		2А1П	Оконечный пентод	1,2	0,12	90	9,5	90	2,1	-4,5	2,15	270	100	10	1	0,27	-	-	-	-		
11	6A8B	6A8B	Гелтод-преобразователь	6,3	0,3	250	3	100	2,7	-3	0,51	100	360	-	3	-	12,5	400	12,5	2,6		
12	6A87	6К150	Пентод УКВ Варимю	6,3	0,45	300	12,5	200	3,2	-3	5,0	3500	700	-	3	-	8,0	0,015	5,0	13		
13	6A87	6К146	Пентод укв	6,3	0,45	300	10	150	2,5	-2	9	9000	1000	-	3	-	11	5000	5	13		
14	6A85	6A85	Пентод укв миниатюрный	6,3	0,3	250	7	150	2	-8	5	4000	800	-	2	-	4,5	0,025	1,8	4		
15	6A87	6Ж15	Телевизионный видео-пентод	6,3	0,65	300	30	150	7	-3	11	1430	130	-	9	3,0	13	0,06	7,5	12		
16	6B8	6B8B	Двойной диод пентод	6,3	0,3	250	8,0	12,5	2,3	-3	1,1	730	650	-	2,5	-	6	0,005	9	2,6		
17	6C5M	6C5	Триод	6,3	0,3	250	8,0	-	-	-8	2,0	20	10	10	2,5	0,25	5	2,0	1,1	3		
18	6F7	6P7B	Двойной диод-триод	6,3	0,3	250	11,1	-	-	-3	1,2	70	58	-	2	-	5	1,5	4,5	24		
19	6E5	6E5	Электронный индикатор	6,3	0,3	250	0,1-5	-	-	-8(0)	0,8	20	2,5	1000	-	-	-	-	-	-	2,9	
20	6J6	6C2B	Триод	6,3	0,3	250	9	-	-	-8	2,6	20	7,7	-	2,5	-	4,2	3,8	5	3		
21	6J6	6H1P	Двойной триод миниатюр	6,3	0,45	150	3,0	-	-	-10	5,3	38	7,1	-	1,5	-	2,2	1,6	0,4	5		
22	6J7	6Ж7B	Пентод 6Ч	6,3	0,3	250	2	100	0,5	-3	1,2	1400	12	-	0,75	-	7	500	12	6		
23	6J7	6K7B	Пентод 4В4 Варимю	6,3	0,3	250	7	100	1,7	-3	1,45	1200	800	-	2,25	0,2	7	500	12	6		
24	6K8	6D1	Триод-вакуум	6,3	0,3	230	2,5	100	2,6	-3	0,3	-	500	-	0,5	-	6	0,03	5	27		
25	6K9M	6K9	Пентод 4В4 Варимю	6,3	0,3	250	9	100	2,6	-3	0,3	2,0	1600	800	-	0,5	-	4,8	0,005	11	8	
26	6N7C	6N7	Двойной триод класса В	6,3	0,8	300	3,5	-	-	0,9	3,2	35	23	8	1,1	1,0	4,3	2,4	5,4	21		
27	6P3	6P3	Лучевой тетрод	6,3	0,9	250	7,8	250	7	-14	6,1	130	21	2,5	20,5	6,5	10	4,0	8	9		
28	6P5	6C4B	Триод	6,3	0,3	250	1	-	-	-2	1,6	100	63	-	0,4	0,06	2,2	2,8	3,2	23		
29	6P6C	6P6	Оконечный пентод	6,3	0,7	250	3,4	250	7	-16,5	2,5	200	80	7	10	3,2	8	0,5	6,5	9		
30	6P6	6P2	Лучевой тетрод	6,3	0,45	250	4,5	250	4,5	-12,5	4,1	250	52	5	12	4,5	9,5	0,7	7,5	9		
31	6A7	6A1B5	Гелтод-преобразователь	6,3	0,5	250	3,5	100	8,5	0	0,45	-	1000	-	1	-	9,5	5,0	1,2	15		
32	6S7	6Ж7B	Пентод 4В4	6,3	0,3	250	3,0	100	0,8	-3	1,65	2500	1500	-	2,5	-	6,0	0,005	7,0	13		
33	6S7	6Ж116	Пентод 4В4	6,3	0,3	250	3,0	100	0,8	-3	1,65	2500	1500	-	2,5	-	6,0	0,005	7,0	13		
34	6S17	6H9	Двойной триод	6,3	0,3	250	10,8	150	4,1	-1	4,9	4400	900	-	3	-	8,5	0,003	7,0	12		
35	6S17	6H8	Двойной триод	6,3	0,3	250	23	-	-	-2,4	1,6	70	44	-	1	-	8,2	2,8	3,5	10		
36	6K7	6K7B	Пентод 4В4 Варимю	6,3	0,3	250	9	-	-	-8	2,6	20	7,7	-	2,5	-	5,0	2,0	1,0	10		
37	6Q7	6P7B	Двойной диод триод	6,3	0,3	250	9,2	100	2,4	-3	2,0	1600	800	-	4	-	6	0,003	7	13		
38	6R7	6P15	Двойной диод триод	6,3	0,3	250	9,5	-	-	-2	1,1	100	90	-	2,5	-	3,2	1,6	3,0	14		
39	6SC7	6H10	Двойной триод	6,3	0,3	250	2,0	-	-	-9	1,9	16	8,5	-	2,5	0,3	3,6	2,4	2,0	14		
40	6P67	6K125	Пентод 4В4 Варимю	6,3	0,3	250	11,8	12,5	4,4	-1	4,7	4200	900	-	3	-	2,2	2,0	3,0	16		
41	6X6M	6X6	Двойной диод	6,3	0,3	125	4	-	-	-7	4,7	4200	900	-	3	-	8,5	0,003	7,0	12		
42	6A7C	6A10	Пентодриг с самовозбужден	6,3	0,3	250	2,4	100	7,1	-3,0	0,35	-	1000	-	1	-	-	0,02	-	19		
43	6L7	6A5B	Гелтод-смеситель	6,3	0,3	250	2,4	100	6,5	-3	0,38	-	700	800	-	1,75	-	7,5	0,005	11,0	15	
44	6S-111	6D17	Генератор тока телевизион	6,3	1,8	44	-	-	-	200	4,4	-	-	-	5	-	7,5	0,001	11,0	22		
45	6Z20	6Ж8	Пентод малобаритный 4В4	6,3	0,5	250	10	100	2,5	-2,4	7,5	15000	2000	-	2,5	-	9,5	0,03	6,25	8		
46	6K6	6P1	Оконечный пентод	6,3	0,4	250	3,3	250	5,5	-8	2,3	160	70	-	8,5	3,4	-	-	-	9		
47	6C6-C	6P4	Оконечный пентод	6,3	0,3	180	1,5	180	2,5	-9	2,3	-	175	-	2,5	1,1	5,6	9,5	7,0	9		
48	6A4-C	6C6	Оконечный триод	6,3	1,0	250	6,0	-	-	-4,5	5,3	4,2	0,8	2,5	1,5	3,5	7,5	1,6	5,5	2		
49	6F1	6C177	Триод-пентод	6,3	0,3	100	3,5	-	-	-3	0,45	8	1,8	-	-	-	2,6	2,0	3,0	7		
50	2C40		Триод укв маячковый	6,3	0,75	250	16,5	-	-	-	4,8	3,5	7,5	-	6,5	0,035	3,2	0,001	12,0	2		
51	2C43		Триод укв маячковый	6,3	0,9	300	2,6	-	-	-	9,0	4,5	5	-	-	-	-	-	-	-		
52	12A6	12P6	Лучевой тетрод	12,6	0,15	250	3,0	250	3,5	-12,5	3	-	70	-	7,5	3,4	9	0,3	9	9		
53	12A7-GT	12H1	Двойной триод	12,6	0,15	180	7,6	-	-	-6,5	1,9	16	8,4	-	1,5	-	9	9	9	11		
54	12A7-100	12H1	Пентод универсальный	12,6	0,15	210	2,0	7,5	0,55	-2,3	1,5	2000	1400	-	2,0	-	2,5	-	-	18		
55	12S5-CT	12C2	Триод	12,6	0,15	250	9,0	-	-	-8	2,6	20	7,7	-	2,5	-	3,4	3,4	3,6	3		
56	12S57	12H10	Двойной триод	12,6	0,15	250	2,0	-	-	-2	1,3	70	5,3	-	2,5	-	2,2	2,0	5,0	16		
57	12S57	12K125	Пентод 4В4 Варимю	12,6	0,15	250	9,2	150	3,4	-2,5	4,0	-	1000	-	3,0	-	0,5	0,003	7,0	12		
58	12S77	12H17B	Пентод 4В4	12,6	0,15	250	9,2	100	0,8	-3	1,65	2500	1500	-	2,5	-	6,0	0,005	7,0	13		
59	12S77	12K17B	Пентод 4В4 Варимю	12,6	0,15	250	9,2	100	0,8	-3	1,65	2500	1500	-	2,5	-	6,0	0,005	7,0	13		
60	12S77	12P17B	Двойной диод-триод	12,6	0,15	250	9,9	-	-	-2	1,1	1000	600	-	4,0	-	6,0	0,003	7,0	13		
61	12S77	12P17B	Двойной диод-триод	12,6	0,15	250	9,9	-														

Classification

ТАБЛИЦА ПРИЕМНОУСИЛИТЕЛЬНЫХ РАДИОЛАМП

№ п/п	Обозначение		Тип лампы	Накал		Анод		Экр сетка		Смещение	Крутизна	Код	Внутр. сопр.	Сопр. напр.	Мощн. вх.	Вых. мощн.	Емкости			Примечания		
	старое	новое		U _г	I _г	U _а	I _а	U _с	I _с								-E _г	S	М		R _с	R _в
1	954	6Ж1Ж	Пентод УВ4 (железь)	6,3	0,15	250	2	100	0,7	-3	1,4	1700	1200	-	12	-	34	400	3	29		
2	955	6С1Ж	Триод УВ4 (железь)	6,3	0,15	180	4,3	-	-	-3	2,0	25	12,3	20	1,5	0,13	1,0	44	46	30		
3	956	6Ж1Ж	Пентод УВ4 Бариню (железь)	6,3	0,15	250	6,7	100	2,7	-3	5	1250	700	-	12	-	34	400	3	29		
4	9002	6С8П	Триод миниатюрный	6,3	0,16	90	2,5	-	-	-2,5	1,7	25	174	-	1,6	-	1,2	1,1	1,4	6		
5	9003	6К19П	Пентод Бариню миниат	6,3	0,15	250	6,7	100	2,7	-3	1,8	1400	700	-	1,7	-	34	400	3	29		
6	9004	6Д1Ж	Диод УВ4 (железь)	6,3	0,15	117	0,8	-	-	-	-	-	-	-	-	-	-	1,5	-	4		
7		1А1П	Генлок-преобразователь	1,2	0,06	90	0,8	45	1,9	0	0,25	-	800	-	-	-	-	-	-	1		
8		1Б1П	Диод-пентод низкой частоты	1,2	0,06	90	-	-	-	0	0	50 ^м	-	1000	-	-	-	-	-	-		
9		1К1П	Пентод В4 Бариню	1,2	0,06	90	1,8	45	0,65	0	0,75	-	800	-	-	-	-	-	-	31	используется в качестве лампы накаливания для лампы	
10		2П1П	Оконечный пентод	1,2	0,12	90	2,5	90	2,1	-4,5	2,15	270	100	10	-	0,27	-	-	-	-		
11	6А8	6А8Б	Генлок-преобразователь	6,3	0,3	250	3	100	2,7	-3	0,51	100	360	-	1	-	12,5	400	12,5	2,6		
12	6АВ7	6К15Б	Пентод УКВ Бариню	6,3	0,45	300	12,5	200	3,2	-3	3,0	3500	700	-	3	-	8,0	0,075	5,0	13		
13	6АС7	6К14Б	Пентод укв	6,3	0,45	300	10	150	2,5	-2	9	9000	1000	-	3	-	11	0,005	5	13		
14	6АС5	6АЖ5	Пентод укв миниатюрный	6,3	0,3	250	7	150	2	-8	5	4000	800	-	2	-	6,5	0,025	1,8	4		
15	6АС7	6Ж15Б	Телевизионный видео-пентод	6,3	0,65	300	30	150	7	-3	11	1430	130	-	9	3,0	13	0,06	7,5	12		
16	6В6	6В6Б	Двойной диод пентод	6,3	0,3	250	3,0	125	2,3	-3	1,1	730	650	-	2,5	-	6	0,005	9	2,6		
17	6С5М	6С5	Триод	6,3	0,3	250	8,0	-	-	-8	2,0	20	10	10	2,5	0,25	3	2,0	11	3		
18	6Г7	6Р7Б	Двойной диод-триод	6,3	0,3	250	1,1	-	-	-3	1,2	70	58	-	2	-	8	1,5	4,5	2,4		
19	6Е5	6Е5	Электронный индикатор	6,3	0,3	250	0,1-5	-	-	-8(0)	0,8	20	25	1000	-	-	-	-	-	-	2,9	
20	6Д5	6С2Б	Триод	6,3	0,3	250	9	-	-	-8	2,6	20	7,7	-	2,5	-	4,2	3,8	5	3		
21	6Д6	6Н1П	Двойной триод миниатюр	6,3	0,45	150	3,0	-	-	-10	5,3 ^м	38	7,1	-	1,5 ^м	-	2,2	1,6	0,6	5		
22	6Д7	6Ж7Б	Пентод В4	6,3	0,3	250	2	100	0,5	-3	1,2	1400	12	-	0,75	-	7	2,9	12	8		
23	6К7	6К7Б	Пентод В4 Бариню	6,3	0,3	250	7	100	1,7	-3	1,45	1200	800	-	2,25	0,2	7	0,005	1,2	8		
24	6К8	6Д1	Триод-вакуум	6,3	0,3	250	2,5	100	6,0	-3	0,3 ^м	-	500	-	0,5	-	6	0,03	5	2,7		
25	6К9М	6К9	Пентод В4 Бариню	6,3	0,3	250	9	100	2,6	-3	2,0	1600	800	-	3	-	4,8	0,005	1,1	8		
26	6Н7С	6Н7	Двойной триод класса В	6,3	0,8	300	3,5 ^м	-	-	0 ^м	3,2 ^м	35 ^м	23 ^м	8 ^м	11 ^м	10 ^м	4,3	2,4	3,4	2,1		
27	6П3	6П3	Лучевой тетрод	6,3	0,9	250	7,8	250	7	-14	6,1	130	21	2,5	20,5	6,5	1,0	6,0	8	9		
28	6П5	6С4Б	Триод	6,3	0,3	250	1	-	-	-2	1,6	100	63	-	0,4	0,06	2	2,8	3,2	2,3		
29	6В6Б	6П6	Оконечный пентод	6,3	0,7	250	3,4	250	7	-16,5	2,5	200	80	7	10	3,2	8	0,5	6,5	9		
30	6В6	6П2	Лучевой тетрод	6,3	0,45	250	4,5	250	4,5	-12,5	4,1	250	52	5	12	4,5	9,5	0,7	7,5	9		
31	6АХ7	6АХ5Б	Генлок-преобразователь	6,3	0,3	250	3,5	100	8,5	0	0,45	-	1000	-	1	-	9,5	0,005	1,2	15		
32	6С17	6Ж17Б	Пентод В4	6,3	0,3	250	3,0	100	0,8	-1	1,65	2500	1500	-	2,5	-	6,0	0,005	7,0	13		
33	6СМ7	6К11Б	Пентод В4	6,3	0,3	250	9	150	4,1	-1	4,9	4400	900	-	3	-	8,5	0,005	1,0	12		
34	6СЛ7	6Н9	Двойной триод	6,3	0,3	250	2,3 ^м	-	-	-2 ^м	1,6	70	44 ^м	-	1	-	3,2	2,8	3,5	10		
35	6СН7	6Н8	Двойной триод	6,3	0,6	250	9 ^м	-	-	-8 ^м	2,6	20 ^м	7,7 ^м	-	2,5	-	3,4	4 ^м	1,0 ^м	10		
36	6СК7	6К17Б	Пентод В4 Бариню	6,3	0,3	250	9,2	100	2,4	-3	2,0	1600	800	-	4	-	6	0,005	7	13		
37	6СЛ7	6Р17Б	Двойной диод триод	6,3	0,3	250	0,9	-	-	-2	1,1	100	90	-	2,5	-	3,2	1,6	3,0	14		
38	6СР7	6Р15Б	Двойной диод триод	6,3	0,3	250	9,5	-	-	-9	1,9	16	8,5	-	2,5	0,3	3,6	2,4	2,8	14		
39	6СГ7	6Н10	Двойной триод	6,3	0,3	250	2,0 ^м	-	-	-2	1,4	70	50	-	2,2	-	2,2	2,0	3,0	16		
40	6СВ7	6К12Б	Пентод В4 Бариню	6,3	0,3	250	11,8	125	4,4	-1	4,7	4200	900	-	3	-	8,5	0,005	7,0	12		
41	6Х6М	6Х6	Двойной диод	6,3	0,3	125	4 ^м	-	-	-	-	-	-	-	-	-	0,02	-	-	19		
42	6АХ7С	6А10	Пентод с самовозбуждением	6,3	0,3	250	2,4	100	7,1	-3,0	0,35 ^м	-	1000	-	1	-	7,5	0,005	1,0	15		
43	6Л7	6А2Б	Пентод-смеситель	6,3	0,3	250	2,4	100	6,5	-3	0,38 ^м	700	800	-	1,75	-	7,5	0,005	1,0	22		
44	6А-111	6Д11П	Генератор тока телевизии	6,3	1,8	44	-	-	-	200 ^м	+44	-	-	-	5	-	2,5	-	-	-	2,8	
45	6В20	6ЖВ	Пентод малобаритный УВ4	6,3	0,5	250	10	100	2,5	-2,4	7,5	15000	2000	-	2,5	-	9,5	0,03	6,25	8		
46	6К8	6П1	Оконечный пентод	6,3	0,4	250	3,3	250	5,5	-9	2,3	160	70	-	8,5	3,4	-	-	-	9		
47	6С6-С	6П4	Оконечный пентод	6,3	0,3	180	15	180	2,5	-9	2,2	175	-	-	2,75	1,1	5,5	9,5	7,0	9		
48	6В4-С	6С6	Оконечный триод	6,3	1,0	250	6,0	-	-	-4,5	5,3	4,2	0,8	2,5	1,5	3,5	7,5	1,6	5,5	2		
49	6Ф7	6С177	Триод-пентод	6,3	0,3	100	3,5	-	-	-3	0,45	8	1,8	-	2,5	-	2,5	2,0	3,0	7		
50	2С40		Триод УКВ маячковый	6,3	0,75	250	16,5	-	-	-4,8	3,5	7,5	-	6,5	0,035	-	-	-	-	2		
51	2С43		Триод УКВ маячковый	6,3	0,9	300	2,6	-	-	-	8,0	4,5	5	-	-	-	-	-	-	-		
52	12А6	12П6	Лучевой тетрод	12,6	0,15	250	3,0	250	3,5	-12,5	3	-	70	-	7,5	3,4	9	0,3	9	9		
53	12Н7-ГТ	12Н1	Двойной триод	12,6	0,15	180	7,6	-	-	-6,5	1,9	16	8,4	-	1,5	-	9	9	9	11		
54	12Н7-200	12К11	Пентод универсальный	12,6	0,15	180	7,6	-	-	-6,5	1,9	16	8,4	-	1,5	-	9	9	9	11		
55	12С15-С1	12С2	Триод	12,6	0,075	210	2,0	75	0,55	-2,3	1,5	2000	1400	-	8,0	-	9	9	9	18		
56	12С17	12Н10	Двойной триод	12,6	0,15	250	9,0	-	-	-8	2,6	20	7,7	-	2,5	-	3,4	3,4	3,6	3		
57	12С17	12К12Б	Пентод В4 Бариню	12,6	0,15	250	2,0	-	-	-2	1,3	70	5,3	-	2,5	-	2,2	2,0	3,0	16		
58	12С17	12Ж17Б	Пентод В4	12,6	0,15	250	9,2	150	3,4	-2,5	4,0	-	1000	-	3,0	-	8,5	0,005	7,0	12		
59	12С17	12К17Б	Пентод В4 Бариню	12,6	0,15	250	3,0	100	0,8	-3	1,65	2500	1500	-	2,5	-	6,0	0,005	7,0	13		
60	12С17	12Р17Б	Двойной диод-триод	12,6	0,15	250	3,2	100	2,6	-3	2,0	1600	800	-	4,0	-	6,0	0,005	7,0	13		
61	12С17	12Р17Б	Двойной диод-триод	12,6	0,15																	

ТАБЛИЦА ПРИЕМНОУСИЛИТЕЛЬНЫХ РАДИОЛАМП

№ п/п	Обозначение		Тип лампы	Накал		Анод		Экр. сетка		Смещение	Крутизна	Доз. усил.	Внут. сопр.	Сопр. напр.	Мощность	Вых. мощ.	Емкости			Примечания		
	старое	новое		U _н	I _н	U _а	I _а	U _с	I _с								E _с	S	Г		R _с	R _о
1	954	6Ж1Ж	Пентод УВЧ (жолды)	6,3	0,15	250	2	100	0,7	-3	1,4	1700	1200	-	12	-	3,4	500	5	29		
2	955	6С1Ж	Триод УВЧ (жолды)	6,3	0,15	180	4,3	-	-	-5	2,0	25	12,5	20	1,5	0,13	1,0	1,4	0,6	30		
3	958	6Ж1Ж	Пентод УВЧ Варимю (жолды)	6,3	0,15	250	6,7	100	2,7	-3	1,8	7200	700	-	12	-	3,4	500	5	29		
4	9002	6С1Ж	Триод миниатюрный	6,3	0,15	90	2,5	-	-	-2,5	1,7	25	17,4	-	1,6	-	1,2	1,1	1,4	6		
5	9003	6К19П	Пентод Варимю миниат.	6,3	0,15	250	6,7	100	2,7	-3	1,8	1400	700	-	1,7	-	3,4	500	5	4		
6	9004	6Д1Ж	Диод УВЧ (жолды)	6,3	0,15	117	5,5	-	-	-	-	-	-	-	-	-	-	-	-	7		
7	1117	1А1П	Диод-преобразователь	1,2	0,06	90	0,8	45	1,9	0	0,25	-	800	-	-	-	-	-	-	-	7	
8	1517	1К1П	Диод-пентод низкой частоты	1,2	0,06	90	-	3	0,5	0	0	50	1000	-	-	-	-	-	-	-	7	
9	1К1П	1К1П	Пентод В4 Варимю	1,2	0,06	90	1,8	45	0,65	0	0,75	-	800	-	-	-	-	-	-	-	7	
10	211П	211П	Оконечный пентод	1,2	0,12	90	9,3	90	2,1	-4,5	2,5	270	100	10	-	-	0,27	-	-	31		
11	6А8	6А8Б	Пентод-преобразователь	6,3	0,3	250	3	100	2,7	-3	0,51	100	360	-	1	-	12,5	400	12,5	26		
12	6А8В	6А15Б	Пентод УКВ Варимю	6,3	0,45	300	125	200	3,2	-3	5,0	3500	700	-	3	-	8,0	0,015	5,0	13		
13	6А8В	6Ж17Б	Пентод УКВ	6,3	0,45	300	10	150	2,5	-2	9	9000	1000	-	3	-	11	0,005	5	13		
14	6А8В	6АЖ5	Пентод УКВ миниатюрный	6,3	0,3	250	7	150	2	-8	5	4000	800	-	2	-	6,5	0,025	1,8	4		
15	6А8В	6Ж15	Телевизионный видео-пентод	6,3	0,65	300	30	150	7	-3	11	1430	130	-	9	3,0	13	0,06	7,5	12		
16	6В8	6В8Б	Двойной диод пентод	6,3	0,3	250	30	125	2,3	-3	1,1	730	650	-	2,5	-	6	0,005	9	26		
17	6С3М	6С3	Триод	6,3	0,3	250	8,0	-	-	-8	2,0	20	10	10	2,5	0,25	3	2,0	11	3		
18	6Г7	6Г7Б	Двойной диод-триод	6,3	0,3	250	1,1	-	-	-3	1,2	70	58	-	2,5	-	5	1,5	4,5	24		
19	6Е5	6Е5	Электронный индикатор	6,3	0,3	250	0,1-5	-	-	-8(0)	0,8	20	25	1000	-	-	-	-	-	23		
20	6Л8	6С2Б	Триод	6,3	0,3	250	9	-	-	-8	2,6	20	7,7	-	2,5	-	4,2	3,8	5	3		
21	6Л8	6Н1П	Двойной триод миниатюр	6,3	0,45	250	30	-	-	-10	5,3	38	7,1	-	1,5	-	2,2	1,6	0,6	5		
22	6Л8	6Ж7Б	Пентод В4	6,3	0,3	250	2	100	0,5	-3	1,2	1400	12	-	0,75	-	7	0,01	12	8		
23	6Л8	6К7Б	Пентод В4 Варимю	6,3	0,3	250	7	100	1,7	-3	1,45	1200	800	-	2,25	0,2	7	4,0	1,2	8		
24	6Л8	6Д1	Триод-вакуум	6,3	0,3	250	2,5	100	6,0	-3	0,3	-	500	-	0,8	-	6	0,03	5	27		
25	6Л8	6К9	Пентод В4 Варимю	6,3	0,3	250	9	100	2,6	-3	2,0	1600	800	-	0,8	-	8	0,03	5	27		
26	6Л7С	6Л7	Двойной триод класса В	6,3	0,8	300	35	-	-	0	3,2	35	23	0,4	11	10	1,8	0,03	11	8		
27	6Л7С	6Л7	Лучевой тетрод	6,3	0,9	250	78	250	7	-14	6,1	130	21	2,5	20,5	6,5	7,0	4,0	8	9		
28	6Л7С	6С4Б	Триод	6,3	0,3	250	1	-	-	-2	1,6	100	63	-	0,4	0,06	2,2	2,8	3,2	23		
29	6Ф8С	6П2	Оконечный пентод	6,3	0,7	250	34	250	7	-16,5	2,5	200	80	7	10	3,2	8	0,5	6,5	9		
30	6В8	6П2	Лучевой тетрод	6,3	0,45	250	45	250	4,5	-12,5	4,1	250	52	5	12	4,5	9,5	0,7	7,5	9		
31	6А7	6А15Б	Пентод-преобразователь	6,3	0,3	250	3,5	100	8,5	0	0,45	1000	-	-	1,5	-	5,5	2,0	12	15		
32	6С17	6Ж17Б	Пентод В4	6,3	0,3	250	3,0	100	0,8	-3	1,65	2500	1500	-	2,5	-	6,0	0,005	7,0	13		
33	6С17	6Н9	Двойной триод	6,3	0,3	250	10,8	150	4,1	-1	4,9	4400	900	-	3	-	8,5	0,003	7,0	12		
34	6С17	6Н8	Двойной триод	6,3	0,3	250	23	-	-	-2	1,6	70	4,4	-	1	-	3,2	2,8	5,5	10		
35	6С17	6Н8	Двойной триод	6,3	0,6	250	9	-	-	-8	2,6	20	7,7	-	2,5	-	3,4	4,0	1,0	10		
36	6С17	6К17Б	Пентод В4 Варимю	6,3	0,3	250	9,2	100	2,4	-3	2,0	1600	800	-	4	-	6	0,003	7	13		
37	6С17	6Р17Б	Двойной диод триод	6,3	0,3	250	0,9	-	-	-2	1,1	100	90	-	2,5	-	3,2	1,6	3,0	14		
38	6С17	6Р15	Двойной диод триод	6,3	0,3	250	9,5	-	-	-9	1,9	16	8,5	-	2,5	0,3	3,6	2,4	2,8	14		
39	6С17	6Н10	Двойной триод	6,3	0,3	250	20	-	-	-2	1,4	70	50	-	2,5	-	2,2	2,0	3,0	16		
40	6С17	6К12Б	Пентод В4 Варимю	6,3	0,3	250	11,8	125	4,4	-1	4,7	4200	900	-	3	-	8,5	0,003	7,0	12		
41	6Л6М	6Л6	Двойной диод	6,3	0,3	125	4,8	-	-	-	-	-	-	-	-	-	-	-	-	17		
42	6А16С1	6А10	Пентод триод с самовозбуждением	6,3	0,3	250	2,4	100	7,1	-3,0	0,35	-	1000	-	1	-	7,5	0,005	11,0	15		
43	6Л7	6А15Б	Пентод-преобразователь	6,3	0,3	250	2,4	100	6,5	-3	0,38	700	800	-	1,75	-	7,5	0,004	11,0	22		
44	6С3-111	6П1	Генератор тока телевизион	6,3	1,8	44	-	-	-	200	+4	-	-	-	-	-	-	-	-	22		
45	6С17	6ЖВ	Пентод малобаритный УВЧ	6,3	0,5	250	10	100	2,5	-2,4	7,5	1500	2000	-	2,5	-	3,5	0,03	6,25	8		
46	6К8	6П1	Оконечный пентод	6,3	0,4	250	33	250	5,5	-2	2,3	160	70	-	8,5	3,4	8,5	0,03	6,25	8		
47	6С6-6	6П4	Оконечный пентод	6,3	0,3	180	15	180	2,5	-9	2,3	-	175	-	8,5	11	5,5	9,5	7,0	9		
48	6А4-6	6С6	Оконечный триод	6,3	1,0	250	60	-	-	-4,5	3,3	42	0,8	2,5	1,5	3,5	7,5	1,6	5,5	2		
49	6А7	6С177	Триод-пентод	6,3	0,3	100	3,5	-	-	-3	0,45	8	18	-	-	-	2,5	2,0	3,0	7		
50	2С40	2С40	Триод УКВ маячковый	6,3	0,75	250	16,5	100	1,5	-3	1,1	900	850	-	-	-	3,2	0,003	12,0	7		
51	2С43	2С43	Триод УКВ маячковый	6,3	0,9	300	2,6	-	-	-	4,8	35	7,5	-	6,5	0,035	-	-	-	2		
52	12А6	12П6	Лучевой тетрод	12,6	0,15	250	30	250	3,5	-12,5	3	-	70	-	7,5	3,4	9	0,3	9	9		
53	12А7-6Т	12К11	Двойной триод	12,6	0,15	180	7,6	-	-	-5,5	1,9	16	8,4	-	8,0	-	8,0	-	-	11		
54	12А7-6Т	12К11	Пентод универсальный	12,6	0,15	180	7,6	-	-	-5,5	1,9	16	8,4	-	8,0	-	8,0	-	-	11		
55	12А7-6Т	12С2	Триод	12,6	0,075	210	2,0	75	0,55	-2,3	1,5	2000	1400	-	1,5	-	3	3	3	11		
56	12С67	12Н10	Двойной триод	12,6	0,15	250	9,0	-	-	-8	2,6	20	7,7	-	2,5	-	3,4	3,4	3,6	3		
57	12С67	12К12Б	Пентод В4 Варимю	12,6	0,15	250	2,0	-	-	-2	1,3	70	53	-	3,0	-	2,2	2,0	3,0	16		
58	12С77	12К17Б	Пентод В4	12,6	0,15	250	9,2	150	3,4	-2,5	4,0	-	1000	-	3,0	-	0,5	0,003	7,0	12		
59	12С77	12К17Б	Пентод В4 Варимю	12,6	0,15	250	30	100	0,8	-3	1,65	2500	1500	-	2,5	-	6,0	0,003	7,0	13		
60	12С77	12Р17Б	Двойной диод-триод	12,6	0,15	250	9,2	100	2,6	-3	2,0	1600	800	-	4,0	-	6,0	0,003	7,0	13		
61	12С77	12Р17Б	Двойной диод-триод	12,6	0,15	250	0,9	-	-	-2	1,1	100	91	-	2,5	-	3,2	1,6	3,0	14		
62	12С77	12Р15	Двойной диод-триод	12,6	0,15	250	9,5	-	-	-2	1,1	100	91	-	2,5	-	3,2	1,6	3,0	14		
63	1Б-1	1Б-1	Триод генераторный ДЦВ	12,6	0,1	300	-	-	-	-9	1,9	1,6	8,5	-	2,5	0,3	3,6	2,4	2,8	14		
64	1Б-12	1Б-12	Триод генераторный ДЦВ	12,6	0,1	300	-	-	-	-9	1,9	1,6	8,5	-	2,5	0,3	3,6	2,4	2,8	14		
65	6Д9	6Д9	Двойной пентод генераторный	12,6	0,8	800	-	-	-	-	3	11	-	5	-	1,35	-	-	-	11		
66	6Д12	6Д12	Двойной пентод генераторный	12,6	0,8	800	-	-	-	-	3	11	-	5	-	1,35	-	-	-	11		
67	6А12	6А12	Двойной пентод генераторный	12,6	0,8	800	-	-	-	-	3	11	-	5	-	1,35	-	-	-	11		
68	6А12	6А12	Двойной пентод генераторный	12,6	0,8	800	-	-	-	-	3	11	-	5	-	1,35	-	-	-	11		
69	6А12	6А12	Двойной пентод генераторный	12,6	0,8	800	-	-	-	-	3	11	-	5	-	1,35	-	-	-	11		
70	6А12	6А12	Двойной пентод генераторный	12,6	0,8	800	-	-	-	-	3	11	-	5	-	1,35	-	-	-	11		
71	6А12	6А12	Двойной пентод генераторный	12,6	0,8																	

Microfilm

ТАБЛИЦА ПРИЕМНОУСИЛИТЕЛЬНЫХ РАДИОЛАМП

№ п/п	Обозначение		Тип лампы	Накал		Анод		Экр. сетка		Сме- же	Кру- же	Доз- же	Внутр. сопр.	сопр. нагр.	Мощн. вых.	Вых. сопр.	Емкости			Примечания		
	старое	новое		U _г	I _г	U _а	I _а	U _с	I _с								-E _г	S	Г		R _г	R _а
				V	A	V	mA	V	mA	V	mA	кВ	кВ	кВ	кВ	кВ	кВ	кВ	кВ	кВ	кВ	кВ
1	954	6Ж1Ж	Пентод УВ4 (жолуь)	6,3	0,15	250	2	100	0,7	-3	1,4	1700	1200	-	12	-	3,4	5007	3	29		
2	955	6С1Ж	Триод УВ4 (жолуь)	6,3	0,15	180	4,3	-	-	-3	2,0	25	12,3	20	1,5	0,75	1,0	4,4	0,6	30		
3	956	6Ж1Ж	Пентод УВ4 Варимю (жолуь)	6,3	0,15	250	6,7	100	2,7	-3	1,8	1250	700	-	12	-	3,4	5007	3	29		
4	9002	6СВ1П	Триод миниатюрный	0,3	0,18	90	2,5	-	-	-2,5	1,7	2,5	17,4	-	1,6	-	3,4	0,01	1,4	6		
5	9003	6К19П	Пентод Варимю миниат	6,3	0,15	250	6,7	100	2,7	-3	1,8	1400	700	-	12	-	3,4	0,01	1,4	6		
6	9004	6Д1Ж	Диод УВ4 (жолуь)	6,3	0,15	117	0,8	-	-	-	-	-	-	-	1,7	-	3,4	0,01	1,4	4		
7		1А1П	Пентод-преобразователь	1,2	0,06	90	0,8	45	1,9	0	0,25	-	800	-	-	-	-	-	-	1,4	7	
8		1В1П	Диод-пентод низкой частоты	1,2	0,06	90	-	-	-	-	-	50 ^м	-	-	-	-	-	-	-	-	-	
9		1К1П	Пентод В4 Варимю	1,2	0,06	90	1,8	45	0,65	0	0,75	-	800	1000	-	-	-	-	-	-	-	
10		2П1П	Оконечный пентод	1,2	0,12	90	9,5	90	2,1	-4,5	2,15	270	100	10	-	0,27	-	-	-	-	-	31
11	6А8	6А8Б	Пентод-преобразователь	6,3	0,3	250	3	100	2,7	-3	0,51	100	360	-	1	1,25	4006	12,5	2,6	26	Имеется в комплекте с трансформатором. Макс. мощность 100 Вт. U _а = 250 В.	
12	6А87	6К15Б	Пентод УКВ Варимю	6,3	0,45	300	12,5	200	3,2	-3	5,0	3500	700	-	3	-	8,0	0,015	5,0	13		
13	6А87	6Ж15Б	Пентод УКВ	6,3	0,45	300	10	150	2,5	-2	9	9000	1000	-	3	-	11	5000	5	13		
14	6А85	6АЖ5	Пентод УКВ миниатюрный	6,3	0,3	250	7	150	2	-8	5	4000	800	-	2	-	6,5	0,025	1,8	4		
15	6А87	6Ж15	Телевизионный видео-пентод	6,3	0,65	300	30	150	7	-3	11	1430	130	-	9	3,0	13	0,06	7,5	12		
16	6В8	6В8Б	Двухнодный диод пентод	6,3	0,3	250	3,0	125	2,3	-3	1,1	730	650	-	2,5	-	6	0,005	9	2,6		
17	6С5М	6С5	Триод	6,3	0,3	250	8,0	-	-	-8	2,0	20	10	10	2,5	0,25	3	2,0	11	3		
18	6Г7	6Р7Б	Двухнодный диод-триод	6,3	0,3	250	1,1	-	-	-3	1,2	70	58	-	2	-	3	1,5	4,5	2,4		
19	6Е5	6Е5	Электронный индикатор	6,3	0,3	250	0,1-5	-	-	-8(0)	0,8	20	25	1000	-	-	-	-	-	-	-	
20	6Г6	6С2Б	Триод	6,3	0,3	250	9	-	-	-8	2,6	20	77	-	2,5	-	4,2	3,8	5	3		
21	6Г6	6М1П	Двухнодный триод миниатюр	6,3	0,45	150	30	-	-	-10	5,3	3,8	7,1	-	1,5	-	2,2	1,6	0,4	5	Имеется в комплекте с трансформатором.	
22	6К7	6Ж7Б	Пентод В4	6,3	0,3	250	2	100	0,5	-3	1,2	1400	12	-	0,75	-	7	500	12	8		
23	6К7	6К7Б	Пентод В4 Варимю	6,3	0,3	250	7	100	1,7	-3	1,45	1200	800	-	2,25	0,2	7	600	12	8		
24	6К8	6Д1	Триод-сексод	6,3	0,3	250	2,5	100	6,0	-3	0,3	-	500	-	0,8	-	6	0,03	5	2,7	Имеется в комплекте с трансформатором.	
25	6К9М	6К9	Пентод В4 Варимю	6,3	0,3	250	9	100	2,6	-3	2,0	1600	800	-	0,8	-	6	0,03	5	2,7		
26	6Н7С	6Н7	Двухнодный триод класса В	6,3	0,8	300	3,5	-	-	0,1	3,2	35	23	8	11,4	10	4,8	600	11	8	Имеется в комплекте с трансформатором. Макс. мощность 100 Вт. U _а = 250 В.	
27	6П5	6П5	Лучевой тетрод	6,3	0,9	250	7,8	250	7	-14	6,1	130	21	2,5	20,5	6,5	7,0	3,4	5,4	21		
28	6П6	6С4Б	Триод	6,3	0,3	250	1	-	-	-2	1,6	100	63	-	0,4	0,06	2,2	2,8	3,2	2,3		
29	6П6	6П2	Оконечный пентод	6,3	0,7	250	3,4	250	7	-16,5	2,5	200	80	7	10	3,2	8	0,5	6,5	9		
30	6В6	6П2	Лучевой тетрод	6,3	0,45	250	4,5	250	4,5	-12,5	4,1	250	52	5	12	4,5	9,0	0,7	7,5	9		
31	6С17	6А15Б	Пентод В4	6,3	0,3	250	3,5	100	8,5	0	0,45	-	1000	-	1	-	9,5	2,0	1,2	15		
32	6С17	6Ж17Б	Пентод В4	6,3	0,3	250	3,0	100	0,8	-3	1,65	2500	1500	-	2,5	-	6,0	0,005	7,0	13		
33	6С17	6Ж17Б	Пентод В4	6,3	0,3	250	3,0	100	0,8	-3	1,65	2500	1500	-	2,5	-	6,0	0,005	7,0	13		
34	6С17	6Н9	Двухнодный триод	6,3	0,3	250	10,8	150	4,1	-1	4,9	4400	900	-	3	-	8,5	0,003	7,0	12		
35	6С17	6Н8	Двухнодный триод	6,3	0,3	250	2,3	-	-	-2,4	1,6	70	44	-	1	-	3,2	2,8	5,5	10	Имеется в комплекте с трансформатором.	
36	6С17	6К17Б	Пентод В4 Варимю	6,3	0,3	250	9	-	-	-8	2,6	20	77	-	2,5	-	4,4	4,0	10,0	10	Имеется в комплекте с трансформатором.	
37	6С17	6Р17Б	Двухнодный диод-триод	6,3	0,3	250	9,2	100	2,4	-3	2,0	1600	800	-	4	-	6	0,003	7	13		
38	6С17	6Р15	Двухнодный диод-триод	6,3	0,3	250	0,9	-	-	-2	1,1	100	90	-	2,5	-	3,2	1,6	3,0	14		
39	6С17	6Н10	Двухнодный триод	6,3	0,3	250	9,5	-	-	-9	1,9	16	8,5	-	2,5	0,3	3,6	2,4	2,8	14		
40	6С17	6К12Б	Пентод В4 Варимю	6,3	0,3	250	20	-	-	-2	1,4	70	50	-	2,2	-	2,2	2,0	3,0	16		
41	6Х6М	6Х6	Двухнодный диод	6,3	0,3	250	11,8	12,5	4,4	-1	4,7	4800	900	-	3	-	8,5	0,003	7,0	12		
42	6С17-СТ	6А10	Пентод с самовозбуждением	6,3	0,3	250	2,4	100	7,1	-30	0,35	-	1000	-	1	-	7,5	0,003	11,0	15	Имеется в комплекте с трансформатором. Макс. мощность 100 Вт. U _а = 250 В.	
43	6Л7	6А5Б	Пентод-смеситель	6,3	0,3	250	2,4	100	6,5	-3	0,38	700	800	-	1,75	-	7,5	0,001	11,0	22	Имеется в комплекте с трансформатором.	
44	6С-111	6Д17П	Генератор тока телевизора	6,3	1,8	44	-	-	-	200 ^м	4,4	-	-	-	5	-	1,5	0,001	11,0	22	Имеется в комплекте с трансформатором.	
45	6С20	6Ж7Б	Пентод малобаритный УВ4	6,3	0,5	250	10	100	2,5	-2,4	7,5	15000	2000	-	2,5	-	3,5	0,03	6,25	8		
46	6К6	6П7	Оконечный пентод	6,3	0,4	250	3,3	250	5,5	-8	2,3	160	70	-	8,5	3,4	-	-	-	9		
47	6С5-С	6П4	Оконечный пентод	6,3	0,3	180	1,5	180	2,5	-9	2,3	-	175	-	8,75	1,1	5,5	9,5	7,0	9		
48	6В4-С	6С6	Оконечный триод	6,3	1,0	250	6,2	-	-	-4,5	5,3	4,2	0,8	2,5	1,5	3,5	7,5	1,6	5,5	2		
49	6Г7	6С177	Триод-пентод	6,3	0,3	100	3,5	-	-	-3	0,45	8	1,8	-	-	-	2,6	2,0	3,0	7		
50			пентод	-	-	250	6,5	100	1,5	-3	1,1	900	850	-	-	-	3,2	0,003	12,0	7		
51	2С40		Триод УКВ маячковый	6,3	0,75	250	16,5	-	-	-4,8	3,5	7,5	-	-	6,5	0,035	-	-	-	2		
52	2С43		Триод УКВ маячковый	6,3	0,9	300	2,6	-	-	-	3,0	4,5	5	-	-	-	-	-	-	-	-	
53	12А6	12П6	Лучевой тетрод	12,6	0,1	250	30	250	3,5	-12,5	3	-	70	-	7,5	3,4	9	0,3	9	9		
54	12А17-СТ	12Н1	Двухнодный триод	12,6	0,15	180	7,6	-	-	-6,5	1,9	16	8,4	-	2,0	-	3	3	3	11		
55	12А17-200	12Ж1Л	Пентод универсальный	12,6	0,15	250	9,0	-	-	-8	2,6	20	7,7	-	2,0	-	3,4	3,4	3,6	3		
56	12С17-СТ	12С2	Триод	12,6	0,075	210	2,0	7,5	0,55	-2,3	1,5	2000	1400	-	2,0	-	3,4	3,4	3,6	3		
57	12С17	12Н10	Двухнодный триод	12,6	0,15	250	9,0	-	-	-8	2,6	20	7,7	-	2,0	-	3,4	3,4	3,6	3		
58	12С17	12К12Б	Пентод В4 Варимю	12,6	0,15	250	2,0	-	-	-2	1,3	70	5,3	-	2,5	-	3,4	3,4	3,6	3		
59	12С17	12Ж17Б	Пентод В4	12,6	0,15	250	9,2	150	3,4	-2,5	4,0	-	1000	-	2,2	-	2,0	5,0	1,6	16		
60	12С17	12К17Б	Пентод В4 Варимю	12,6	0,15	250	3,0	100	0,8	-3	1,65	2500	1500	-	3,0	-	6,5	0,003	7,0	12		
61	12С17	12Р17Б	Двухнодный диод-триод	12,6	0,15	250	9,2	100	2,6	-3	2,0	1600	800	-	2,5	-	6,0	0,003	7,0	13		
62	12В87	12Р15	Двухнодный диод-триод	12,6	0,15	250	0,9	-	-	-2	1,1	100	9,4	-	4,0	-	6,0	0,003	7,0	13		
63	1Б-1		Двухнодный диод-триод	12,6	0,15	250	9,5	-	-	-9	1,9	1,6	2,5	-	-	-	3,2	1,6	3,0	14		
64	10-12		Триод генераторный ДЦВ	12,6	0,1	300	-	-	-	-9	1,9	1,6	2,5	-	2,6	0,3	3,6	2,4	2,8	14		
65	6Д2		Триод генераторный ДЦВ	12,6	0,8	800	-	-	-	-	3	11	-	-	5	-	-	-	-	-	-	
66	6Д2		Двухнодный пентод генераторный	12,6	0,8	800	-	-	-	-	10	-	-	-	8,5	2,0	10	0,04	2,5	-	Имеется в комплекте с трансформатором. Макс. мощность 100 Вт. U _а = 250 В.	
67	6Д2		Двухнодный пентод генераторный	12,6	0,8	800	-	-	-	-	10	-	-	-	8,5	2,0	10	0,04	2,5	-		
68	6Д1	6Ж1	Пентод																			

ENCLOSURE

ТАБЛИЦА ПРИЕМНОУСИЛИТЕЛЬНЫХ РАДИОЛАМП

№ п/п	Обозначение		Тип лампы	Накал		Анод		Экр. сетка		Смещение	Крутизна	Коз. усиления	Внутр. сопр.	Сопр. нагр.	Потр. васс. ток	Вых. мощ.	Вых. волн.	Емкости			Примечания
	старое	новое		U _н	I _н	U _а	I _а	U _с	I _с									E _с	S	Г	
1	954	6Ж1Ж	Пентод УВЧ (жолуы)	6,3	0,15	250	2	100	0,7	-3	14	1700	1200	-	12	-	34	4007	5	29	
2	955	6С1Ж	Триод УВЧ (жолуы)	6,3	0,15	180	4,3	-	-	-3	20	25	12,5	20	1,5	0,75	10	14	4,6	30	
3	956	6К1Ж	Пентод УВЧ Баримю (жолуы)	6,3	0,15	250	6,7	100	2,7	-3	8	1250	700	-	18	-	34	4007	5	29	
4	9002	6С8П	Триод миниатюрный	6,3	0,16	90	2,5	-	-	-2,5	1,7	25	174	-	1,6	-	12	1,1	1,4	6	
5	9003	6К19П	Пентод Баримю миниат.	6,3	0,15	250	6,7	100	2,7	-3	1,8	1400	700	-	1,7	-	34	4007	5	29	
6	9004	6Д1Ж	Диод УВЧ (жолуы)	6,3	0,15	117	5,8	-	-	-	-	-	-	-	-	-	-	3,4	1,3	4	
7		1А1П	Гетто-преобразователь	12	0,06	90	0,8	45	1,9	0	0,25	-	800	-	-	-	-	-	-	1	
8		1Б1П	Диод-пентод низкой частоты	12	0,06	90	-	3,5	0	0	-	50 ^м	-	1000	-	-	-	-	-	-	
9		1К1П	Пентод В4 Варимю	12	0,06	90	1,8	45	0,65	0	0,75	-	800	-	-	-	-	-	-	-	
10		2П1П	Оконечный пентод	12	0,12	90	9,5	90	2,1	-4,5	2,5	270	100	-10	-	0,27	-	-	-	-	31
11	6A8	6A8B	Гетто-преобразователь	6,3	0,3	250	3	100	2,7	-3	0,51	100	360	-	1	-	12,5	4006	12,5	2,6	
12	6A7	6K155	Пентод УКВ Баримю	6,3	0,45	300	125	200	3,2	-3	9,0	3500	700	-	3	-	8,0	0,015	5,0	13	
13	6A7	6K146	Пентод УКВ	6,3	0,45	300	10	150	2,5	-2	9	9000	1000	-	3	-	11	0,008	5	13	
14	6A5	6A5X	Пентод УКВ миниатюрный	6,3	0,3	250	7	150	2	-8	5	4000	800	-	2	-	6,5	0,025	1,8	4	
15	6A7	6K145	Телевизионный видео-пентод	6,3	0,65	300	30	150	7	-3	11	1430	130	-	9	3,0	13	0,06	7,5	12	
16	6A6	6B85	Двойной диод пентод	6,3	0,3	250	3,0	125	2,3	-3	1,1	730	650	-	2,5	-	6	0,005	9	2,6	
17	6С5М	6С5	Триод	6,3	0,3	250	8,0	-	-	-8	2,0	20	10	10	2,5	0,25	3	2,0	11	3	
18	6Г1	6Р7Б	Двойной диод-триод	6,3	0,3	250	1,1	-	-	-3	1,2	70	58	-	2	-	3	1,5	4,5	2,4	
19	6Е5	6Е5	Электронный индикатор	6,3	0,3	250	0,1-5	-	-	-8(0)	0,8	20	25	1000	-	-	-	-	-	-	2,9
20	6Г5	6С2Б	Триод	6,3	0,3	250	9	-	-	-8	2,6	20	77	-	2,5	-	4,2	3,8	5	3	
21	6Г6	6Н1П	Двойной триод миниатюр	6,3	0,45	150	30	-	-	-10	5,3	38	21	-	1,5	-	2,2	1,6	0,4	5	
22	6Г7	6Ж7Б	Пентод В4	6,3	0,3	250	2	100	0,5	-3	1,2	1400	12	-	0,75	-	7	2,05	1,2	8	
23	6Г7	6К7Б	Пентод В4 Варимю	6,3	0,3	250	7	100	1,7	-3	1,45	1200	800	-	2,25	-	9,2	7	4,05	1,2	8
24	6К8	6Д1	Триод-сексод	6,3	0,3	250	2,5	100	6,0	-3	2,0	1600	800	-	3	-	6	0,03	5	2,7	
25	6К9М	6К9	Пентод В4 Варимю	6,3	0,3	250	9	100	2,6	-3	2,0	1600	800	-	3	-	6	0,03	5	2,7	
26	6Н7С	6Н7	Двойной триод класса В	6,3	0,8	300	3,5	-	-	0	3	35	23 ^м	8 ^м	1,4	-	10 ^м	4,5	0,005	11	8
27	6П3	6П3	Лучевой тетрод	6,3	0,9	250	7,8	250	7	-14	6,1	130	21	2,5	20,5	6,5	10	2,4	5,4	21	
28	6Р6	6С4Б	Триод	6,3	0,3	250	1	-	-	-2	1,6	100	63	-	0,4	0,06	2,2	2,8	3,2	2,3	
29	6Р6С	6П6	Оконечный пентод	6,3	0,7	250	3,4	250	7	-16,5	2,5	200	80	7	10	3,2	8	0,5	6,5	9	
30	6Р6	6П2	Лучевой тетрод	6,3	0,45	250	4,5	250	4,5	-12,5	4,1	250	52	5	12	4,5	9,5	0,7	7,5	9	
31	6A7	6A15B	Гетто-преобразователь	6,3	0,3	250	3,5	100	8,5	0	0,45	-	1000	-	1	-	5	0,08	1,2	15	
32	6S17	6Ж17Б	Пентод В4	6,3	0,3	250	30	100	0,8	-3	1,65	2500	1500	-	2,5	-	6,0	0,005	7,0	13	
33	6S17	6К11Б	Пентод В4	6,3	0,3	250	30	100	0,8	-3	1,65	2500	1500	-	2,5	-	6,0	0,005	7,0	13	
34	6S17	6Н9	Двойной триод	6,3	0,3	250	10,8	150	4,1	-1	4,9	4400	900	-	3	-	8,5	0,003	7,0	12	
35	6S17	6Н8	Двойной триод	6,3	0,3	250	9 ^м	-	-	-2,4	1,6	70	44 ^м	-	1	-	3,2	2,8	3,5	10	
36	6S17	6К17Б	Пентод В4 Варимю	6,3	0,6	250	9 ^м	-	-	-8 ^м	2,6	20 ^м	7,7 ^м	-	2,5	-	9 ^м	4 ^м	1,0 ^м	10	
37	6S17	6Р17Б	Двойной диод триод	6,3	0,3	250	9,2	100	2,4	-3	2,0	1600	800	-	4	-	6	0,003	7	13	
38	6S17	6Р15	Двойной диод триод	6,3	0,3	250	9,9	-	-	-2	1,1	100	90	-	2,5	-	3,2	1,6	3,0	14	
39	6S17	6Н10	Двойной триод	6,3	0,3	250	9,5	-	-	-9	1,9	16	8,5	-	2,5	0,3	3,6	2,4	2,8	14	
40	6S67	6К12Б	Пентод В4 Варимю	6,3	0,3	250	2,0 ^м	-	-	-2	1,4	70	50	-	2,2	-	2,0	3,0	1,6	16	
41	6X6M	6X6	Двойной диод	6,3	0,3	250	11,8	12,5	4,4	-1	4,7	4200	900	-	3	-	8,5	0,003	7,0	12	
42	6A7C	6A10	Пентод с самовозбуждением	6,3	0,3	125	4	-	-	-	-	-	-	-	-	-	-	-	0,02	-	19
43	6A7	6A5B	Гетто-смеситель	6,3	0,3	250	2,4	100	7,1	-3,0	0,55	-	1000	-	1	-	7,5	0,008	11,0	15	
44	6A7	6Д1П	Генератор тока телевизора	6,3	0,3	250	2,4	100	6,5	-3	0,38	700	800	-	1,75	-	7,5	0,001	13,0	22	
45	7620	6ЖВ	Пентод малобаритный УВЧ	6,3	0,5	250	10	100	2,5	-2,4	7,5	1500	2000	-	2,5	-	9,5	0,08	6,25	8	
46	6K6	6П1	Оконечный пентод	6,3	0,4	250	3,3	250	5,5	-8	2,3	160	70	-	8,5	3,4	-	-	-	9	
47	6С6С	6П4	Оконечный пентод	6,3	0,3	180	15	180	2,5	-9	2,3	-	175	-	2,75	1,1	5,5	9,5	7,0	9	
48	6A4-C	6С6	Оконечный триод	6,3	1,0	250	6,0	-	-	-4,5	5,3	42	0,8	2,5	1,5	3,5	7,5	1,6	5,5	2	
49	6F7	6С17П	Триод-пентод	6,3	0,3	100	3,5	-	-	-3	0,45	8	18	-	-	-	2,6	2,0	3,0	7	
50	2С40		Триод УВЧ маячковый	6,3	0,75	250	16,5	-	-	-	4,8	35	7,5	-	6,5	0,035	3,2	0,008	12,0	2	
51	2С43		Триод УВЧ маячковый	6,3	0,9	300	2,6	-	-	-	9,0	4,5	5	-	-	-	-	-	-	-	
52	12A6	12П6	Лучевой тетрод	12,6	0,15	250	30	250	3,5	-12,5	3	-	70	-	7,5	3,4	9	0,3	9	9	
53	12A7-CT	12Н1	Двойной триод	12,6	0,15	180	7,6	-	-	-6,5	1,9	16	8,4	-	1,5	-	9	3	3	11	
54	12A7-CT	12Ж11	Пентод универсальный	12,6	0,075	270	20	75	0,55	-2,3	1,5	2000	1400	-	2,0	-	8,0	3	3	11	
55	12A7-CT	12С2	Триод	12,6	0,15	250	9,0	-	-	-8	2,6	20	7,7	-	2,5	-	3,4	3,4	3,6	3	
56	12A7-CT	12Н10	Двойной триод	12,6	0,15	250	2,0	-	-	-2	1,3	70	5,3	-	2,2	-	2,0	2,0	3,0	16	
57	12A7-CT	12К12Б	Пентод В4 Варимю	12,6	0,15	250	3,2	150	3,4	-2,5	4,0	-	1000	-	3,0	-	0,5	0,003	7,0	12	
58	12A7-CT	12Ж17Б	Пентод В4	12,6	0,15	250	3,2	100	4,8	-3	1,65	2500	1500	-	2,5	-	6,0	0,003	7,0	13	
59	12A7-CT	12К17Б	Пентод В4 Варимю	12,6	0,15	250	3,2	100	2,6	-3	2,0	1600	800	-	4,0	-	6,0	0,003	7,0	13	
60	12A7-CT	12Р17Б	Двойной диод-триод	12,6	0,15	250	9,9	-	-	-2	1,1	100	91	-	-	-	3,2	1,6	3,0	14	
61	12A7-CT	12Р15	Двойной диод-триод	12,6	0,15	250	9,5	-	-												

Enclosure

ТАБЛИЦА ПРИЕМНОУСИЛИТЕЛЬНЫХ РАДИОЛАМП

№ п/п	Обозначение		Тип лампы	Накал		Анод		Экр. сетка		Степень	Крутизна	Коеф. усилен.	Внутр. сопр.	Площадь	Вых. мощ.	Емкости			Примечания			
	старое	новое		нагр. ток	напр. ток	нагр. ток	напр. ток	U _г	J _г							U _с	J _с	U _к		J _к	U _р	J _р
				Ц _г	J _г	Ц _а	J _а	Ц _с	J _с	E _г	S	κ	R _в	R _с	W	W	U _в	C _к	C _с	C _в		
				V	A	V	mA	V	mA	V	μA	-	кΩ	кΩ	W	W	pF	pF	pF			
1	954	6ЖКЖ	Пентод УВЧ (желез)	6,3	0,15	250	2	100	0,7	-3	1,4	1700	1200	-	12	-	3,4	400	5	29		
2	955	6С1Ж	Триод УВЧ (желез)	6,3	0,15	180	4,3	-	-	-3	2,0	2,5	12,3	20	1,5	0,15	1,0	1,4	0,6	30		
3	958	6К1Ж	Пентод УВЧ Варимю (желез)	6,3	0,15	250	6,7	100	2,7	-3	1,8	1250	700	-	12	-	3,4	400	5	29		
4	9002	6С8Л	Триод миниатюрный	6,3	0,15	90	2,5	-	-	-2,5	1,7	2,5	17,4	-	1,6	-	1,2	1,1	1,4	6		
5	9003	6К19Л	Пентод Варимю миниат.	6,3	0,15	117	5,0	100	2,7	-3	1,8	1400	700	-	1,7	-	3,4	400	5	29		
6	9004	6Д1Ж	Диод УВЧ (желез)	6,3	0,15	117	5,0	100	2,7	-3	1,8	1400	700	-	1,7	-	3,4	400	5	29		
7		1А1П	Пентод-преобразователь	1,2	0,05	90	0,8	4,5	1,9	0	0,25	500	800	-	-	-	-	-	-	1,3	1	
8		1Б1П	Диод-пентод низкой частоты	1,2	0,06	90	0,8	4,5	1,9	0	0,25	500	800	-	-	-	-	-	-	-	-	
9		1К1П	Пентод ВЧ Варимю	1,2	0,06	90	1,8	4,5	0,65	0	0,75	500	800	-	-	-	-	-	-	-	-	
10		2П1П	Оконечный пентод	1,2	0,12	90	3,5	90	2,1	-4,5	2,15	270	100	10	-	0,27	-	-	-	-	-	31
11	6А8	6А8Б	Пентод-преобразователь	6,3	0,3	250	3	100	2,7	-3	0,31	100	360	-	1	-	12,5	400	12,5	26		
12	6АВ7	6К150	Пентод УКВ Варимю	6,3	0,45	300	12,5	200	3,2	-3	3,0	3500	700	-	3	-	8,0	0,015	5,0	13		
13	6АС7	6К116	Пентод УКВ	6,3	0,45	300	10	150	2,5	-2	9	9000	1000	-	3	-	11	0,005	5	13		
14	6АС7	6АЖ5	Пентод УКВ миниатюрный	6,3	0,3	250	7	150	2	-8	5	4000	800	-	2	-	6,5	0,025	1,8	4		
15	6АС7	6Ж-85	Телевизионный видео-пентод	6,3	0,65	300	30	150	7	-3	11	1430	130	-	9	30	13	0,06	7,5	12		
16	6В8	6В8Б	Двухнодный диод пентод	6,3	0,3	250	8,0	12,5	2,3	-3	1,1	730	650	-	2,5	-	6	0,005	9	2,6		
17	6С3М	6С5	Триод	6,3	0,3	250	8,0	-	-	-8	2,0	2,0	10	10	2,5	0,25	3	2,0	1,1	3		
18	6Г7	6Р7Б	Двойной диод-триод	6,3	0,3	250	1,1	-	-	-3	1,2	70	58	-	2	-	1,5	4,5	2,4	2,4		
19	6Е5	6Е5	Электронный индикатор	6,3	0,3	250	0,1-5	-	-	-8(0)	0,8	2,0	2,5	1000	-	-	-	-	-	-	-	2,9
20	6Л8	6С2Б	Триод	6,3	0,3	250	9	-	-	-8	2,6	2,0	7,7	-	2,5	-	4,2	3,8	5	3		
21	6Л8	6Н1П	Двойной триод миниатюр	6,3	0,45	150	30	-	-	-10	5,3	3,8	7,1	-	1,5	-	2,2	2,6	0,4	5		
22	6Л7	6Ж7Б	Пентод ВЧ	6,3	0,3	250	2	100	0,5	-3	1,2	1400	12	-	0,75	-	7	0,005	12	8		
23	6К7	6К7Б	Пентод ВЧ Варимю	6,3	0,3	250	7	100	1,7	-3	1,45	1200	800	-	2,25	0,2	7	0,005	12	8		
24	6К8	6Д1	Триод-вексоод	6,3	0,3	250	2,5	100	2,0	-3	0,3	1600	800	-	0,5	-	6	0,005	5	2,7		
25	6К9М	6К9	Пентод ВЧ Варимю	6,3	0,3	250	9	100	2,6	-3	2,0	1600	800	-	0,5	-	6	0,005	5	2,7		
26	6Н7С	6Н7	Двойной триод класса В	6,3	0,8	300	3,5	-	-	0	3,2	3,5	2,1	8	11	10	4,8	0,005	11	8		
27	6П3	6П3	Лучевой тетрод	6,3	0,9	250	7,8	250	7	-1,4	6,1	130	21	2,5	20,5	6,5	10	4,0	8	9		
28	6Р5	6С4Б	Триод	6,3	0,3	250	1	-	-	-2	1,6	100	63	-	0,4	0,06	2,2	2,8	3,2	2,3		
29	6Р8С	6П2	Оконечный пентод	6,3	0,7	250	3,4	250	7	-16,5	2,5	200	80	7	10	3,2	8	0,5	6,5	9		
30	6В6	6П2	Лучевой тетрод	6,3	0,45	250	4,5	250	4,5	-12,5	4,1	250	52	5	12	4,5	3,5	0,7	7,5	9		
31	6А7	6А15Б	Пентод-преобразователь	6,3	0,3	250	3,5	100	8,5	0	0,45	-	1000	-	-	-	9,5	0,005	12	15		
32	6С17	6Ж17Б	Пентод ВЧ	6,3	0,3	250	3,0	100	0,8	-3	1,65	2300	1500	-	2,5	-	6,0	0,005	7,0	13		
33	6С17	6Ж17Б	Пентод ВЧ	6,3	0,3	250	10,8	150	4,1	-1	4,9	4400	900	-	3	-	8,5	0,005	7,0	12		
34	6С17	6Н9	Двойной триод	6,3	0,3	250	23	-	-	-2,4	1,6	70	4,4	-	1	-	3,2	2,8	3,5	10		
35	6С17	6Н9	Двойной триод	6,3	0,6	250	9	-	-	8	2,6	20	7,7	-	2,5	-	3,4	4,0	1,0	10		
36	6С17	6К17Б	Пентод ВЧ Варимю	6,3	0,3	250	9,2	100	2,4	-3	2,0	1600	800	-	4	-	6	0,005	7	13		
37	6С17	6Р17Б	Двойной диод-триод	6,3	0,3	250	0,9	-	-	-2	1,1	100	9,0	-	2,5	-	3,2	1,6	3,0	14		
38	6С17	6Р17Б	Двойной диод-триод	6,3	0,3	250	9,5	-	-	-9	1,9	16	8,5	-	2,5	0,3	3,6	2,4	2,8	14		
39	6С17	6Н10	Двойной триод	6,3	0,3	250	20	-	-	-2	1,4	70	5,0	-	-	-	2,2	2,0	3,0	16		
40	6Р67	6К12Б	Пентод ВЧ Варимю	6,3	0,3	250	11,8	12,5	4,4	-1	4,7	4200	900	-	3	-	8,5	0,005	7,0	12		
41	6К6М	6К6	Двойной диод	6,3	0,3	125	4	-	-	-	2,6	20	11	-	-	-	3,2	2,0	3,0	7		
42	6СА7СГ	6А10	Пентод с самовозбуждением	6,3	0,3	250	2,4	100	7,1	-3,0	0,35	-	1000	-	1	-	7,5	0,005	11,0	15		
43	6Л7	6А5Б	Пентод-смеситель	6,3	0,3	250	2,4	100	6,5	-3	0,38	700	800	-	1,75	-	7,5	0,001	11,0	22		
44	6С-141	6ДП1	Генератор тока телевизора	6,3	1,8	44	-	-	-	-	2,0	4,4	-	-	5	-	-	-	-	-	-	
45	2620	6ЖВ	Пентод малобаритный УВЧ	6,3	0,5	250	10	100	2,5	-2,4	7,5	15000	2000	-	2,5	-	9,5	0,03	6,25	8		
46	6К6	6П1	Оконечный пентод	6,3	0,4	250	3,3	250	5,5	-8	2,3	160	70	-	8,5	3,4	-	-	-	-	9	
47	6С6-6	6П4	Оконечный пентод	6,3	1,0	180	15	180	2,5	-9	2,3	-	175	-	8,75	1,1	5,5	9,5	7,0	9		
48	6А4-6	6С6	Оконечный триод	6,3	1,0	250	60	-	-	-4,5	3,3	4,2	0,8	2,5	1,5	3,5	7,5	1,6	5,5	2		
49	6Ф7	6С177	Триод-пентод	6,3	0,3	100	3,5	-	-	-3	0,45	8	18	-	-	-	2,6	2,0	3,0	7		
50			пентод	-	-	250	6,5	100	1,5	-3	1,1	900	850	-	-	-	3,2	0,005	12,0	2		
51	2С40		Триод УКВ малочувств.	6,3	0,75	250	16,5	-	-	-	4,8	35	7,5	-	6,5	0,035	-	-	-	-	-	
52	2С43		Триод УКВ малочувств.	6,3	0,9	300	2,6	-	-	-	3,0	4,5	5	-	-	-	-	-	-	-	-	
53	12А6	12П6	Лучевой тетрод	12,6	0,15	250	3,0	250	3,5	-12,5	3	-	70	-	7,5	3,4	9	0,3	9	9		
54	12А7-6Т	12Н1	Двойной триод	12,6	0,15	180	7,6	-	-	-4,5	1,9	16	8,4	-	1,5	-	9	9	8	11		
55	12А7-6Т	12К11	Пентод универсальный	12,6	0,15	180	7,6	-	-	-4,5	1,9	16	8,4	-	1,5	-	9	9	8	11		
56	12С5-6Т	12С2	Триод	12,6	0,075	210	2,0	75	0,55	-2,3	1,5	2000	1400	-	2,0	-	-	-	-	-	-	11
57	12С5-6Т	12Н10	Двойной триод	12,6	0,15	250	9,0	-	-	-8	2,6	20	7,7	-	2,5	-	3,4	3,4	3,6	3		
58	12С5-6Т	12К12Б	Пентод ВЧ Варимю	12,6	0,15	250	9,2	150	3,4	-2,5	4,0	-	53	-	3,0	-	0,5	9,005	7,0	12		
59	12С5-6Т	12К17Б	Пентод ВЧ	12,6	0,15	250	9,2	100	0,8	-3	1,65	2500	1500	-	2,5	-	6,0	0,005	7,0	13		
60	12С5-6Т	12К17Б	Пентод ВЧ Варимю	12,6	0,15	250	9,2	100	2,6	-3	2,0	1600	800	-	4,0	-	6,0	0,005	7,0	13		
61	12С5-6Т	12Р17Б	Двойной диод-триод	12,6	0,15	250	0,9	-	-	-2	1,1	100	9,4	-	-	-	-	-	-	-	-	
62	12С5-6Т	12Р17Б	Двойной диод-триод	12,6	0,15	250	9,5	-	-	-9	1,9	16	8,5	-	2,5	0,3	3,6	2,4	2,8	14		
63	12С5-6Т	12Р17Б	Триод генераторный ДЦВ	12,6	0,1	300	-	-	-	-9	1,9	16	8,5	-	2,5	0,3	3,6	2,4	2,8	14		
64	12С5-6Т	12Р17Б	Триод генераторный ДЦВ	12,6	0,8	800	-	-	-	-	7	11	-	-	-	-	-	-	-	-	-	
65	6С2		Двойной пентод генераторный	6,3	0,3	250	1,1	-	-	-	1,0	-	-	-	-	-	2,7	10	9,04	2,5		
66	6С2		Двойной пентод генераторный	6,3	0,3	250	1,1	-	-	-	1,0	-	-	-	-	-	2,7	10	9,04	2,5		
67	6-441	ЮК1	Пентод генераторный	10	0,6	400	9,5	250	8	-6,5	-	-	-	-	15	2,6	-	-	-	-		
68	807	КЖ2	Тетрод лучевой	6,3	0,9	60	80-200															

ТАБЛИЦА ПРИЕМНОУСИЛИТЕЛЬНЫХ РАДИОЛАМП

№ п/п	Обозначение		Тип лампы	Накал		Анод		Экр. сетка		Смещение	Крутизна	Коз. усиления	Внутр. сопр.	Сопр. нагр.	Мощность	Вых. мощ.	Вход. сопротивление	Емкости			Примечания
	старое	новое		U _г	I _г	U _а	I _а	U _с	I _с									U _с	I _с	C _{вх}	
1	954	6Ж1Ж	Пентод УВЧ (жк. ш. в)	6,3	0,15	250	2	100	0,7	-	1,4	1700	1200	-	12	-	3,4	4007	3	29	
2	955	6С1Ж	Триод УВЧ (жк. ш. в)	6,3	0,15	180	4,3	-	-	-3	2,0	25	12,5	20	1,5	0,73	1,0	1,4	4,6	3,0	
3	958	6К1Ж	Пентод УВЧ Варимю (жк. ш. в)	6,3	0,15	250	6,7	100	2,7	-3	1,8	1400	700	-	1,8	-	3,4	4007	3	29	
4	9002	6С8П	Триод миниатюрный	6,3	0,16	90	2,5	-	-	-2,5	1,7	25	17,4	-	1,6	-	1,2	1,1	1,4	6	
5	9003	6К19П	Пентод Варимю миниат.	6,3	0,15	250	6,7	100	2,7	-3	1,8	1400	700	-	1,7	-	3,4	4007	3	29	
6	9004	6Д1Ж	Диод УВЧ (жк. ш. в)	6,3	0,15	117	5,5	-	-	-	-	-	-	-	-	-	-	4,3	-	7	
7		1А1П	Пентод преобразователь	1,2	0,06	90	0,8	4,5	1,9	0	0,25	-	800	-	-	-	-	-	-	-	
8		1Б1П	Диод пентод низкой частоты	1,2	0,06	90	-	4,5	1,9	0	0	50	-	1000	-	-	-	-	-	-	
9		1К1П	Пентод Вч Варимю	1,2	0,06	90	1,8	4,5	0,65	0	0,75	-	800	-	-	-	-	-	-	-	
10		2П1П	Оконечный пентод	1,2	0,12	90	9,5	90	2,1	-4,5	2,45	270	100	-	10	0,27	-	-	-	-	31
11	6A8	6A8B	Пентод преобразователь	6,3	0,3	250	3	100	2,7	-3	0,91	100	360	-	-	-	12,5	4006	12,5	26	
12	6A7	6K15B	Пентод УКВ Варимю	6,3	0,45	300	12,5	200	3,2	-3	3,0	3500	700	-	3	-	8,0	0,015	5,0	13	
13	6A5	6K14B	Пентод УКВ	6,3	0,45	300	10	150	2,5	-2	9	9000	1000	-	3	-	11	0,008	5	13	
14	6A5	6AЖ5	Пентод УКВ миниатюрный	6,3	0,3	250	7	150	2	-8	5	4000	800	-	2	-	6,5	0,025	1,8	4	
15	6A7	6Ж75	Телевизионный видео-пентод	6,3	0,65	300	30	150	7	-3	11	1430	130	-	9	3,0	13	0,06	7,5	12	
16	6B8	6B8B	Двойной диод пентод	6,3	0,3	250	8,0	12,5	2,3	-3	1,1	730	650	-	2,5	-	6	0,005	9	2,6	
17	6С3М	6С5	Триод	6,3	0,3	250	8,0	-	-	-8	2,0	20	10	-	2,5	0,25	3	2,0	1,1	3	
18	6Г7	6Р7Б	Двойной диод-триод	6,3	0,3	250	1,1	-	-	-3	1,2	70	38	-	2,5	-	5	1,5	4,5	2,4	
19	6Е5	6Е5	Электронный индикатор	6,3	0,3	250	0,1-5	-	-	-8(0)	0,8	20	2,5	1000	-	-	-	-	-	-	2,9
20	6Д5	6С2Б	Триод	6,3	0,3	250	9	-	-	-8	2,6	20	7,7	-	2,5	-	4,2	3,8	5	3	
21	6Д6	6Н1П	Двойной триод миниатюр	6,3	0,45	150	30	-	-	-10	5,3	38	7,1	-	1,5	-	2,2	1,6	0,4	5	
22	6Ж7	6Ж7Б	Пентод Вч	6,3	0,3	250	2	100	0,5	-3	1,2	1400	12	-	0,75	-	7	2,0	1,2	8	
23	6К7	6К7Б	Пентод Вч Варимю	6,3	0,3	250	7	100	1,7	-3	1,45	1200	800	-	2,25	0,2	7	4,0	1,2	8	
24	6К8	6Д1	Триод-сексод	6,3	0,3	250	2,5	100	6,0	-3	0,3	-	800	-	0,5	-	6	0,03	5	2	
25	6К9М	6К9	Пентод Вч Варимю	6,3	0,3	250	9	100	2,6	-3	2,0	1600	800	-	0,5	-	4,8	4,0	1,1	8	
26	6Л7С	6Н7	Двойной триод класса В	6,3	0,6	300	35	-	-	0	3,2	35	23	8	11	10	4,3	2,4	5,4	21	
27	6П3	6П3	Лучевой тетрод	6,3	0,9	250	7,8	250	7	-14	6,1	130	21	2,5	20,5	6,5	10	4,70	8	2	
28	6Р8	6С4Б	Триод	6,3	0,3	250	1	-	-	-2	1,6	100	63	-	0,4	0,06	2,2	2,8	3,2	23	
29	6С6С	6П2	Оконечный пентод	6,3	0,7	250	3,4	250	7	-16,5	2,5	200	80	7	10	3,2	8	0,5	6,5	9	
30	6V8	6П2	Лучевой тетрод	6,3	0,45	250	4,5	250	4,5	-12,5	4,4	250	52	5	12	4,5	9,5	0,7	1,5	9	
31	6A7	6A7B	Пентод преобразователь	6,3	0,3	250	3,5	100	8,5	0	0,45	-	1000	-	1,2	-	9,5	2,0	1,2	15	
32	6A7	6K17B	Пентод Вч	6,3	0,3	250	3,0	100	0,8	-3	1,65	2500	1500	-	2,5	-	6,0	0,005	7,0	13	
33	6A7	6K17B	Пентод Вч	6,3	0,3	250	3,0	100	0,8	-3	1,65	2500	1500	-	2,5	-	6,0	0,005	7,0	13	
34	6A7	6H7	Двойной триод	6,3	0,3	250	10,8	150	4,7	-2	1,9	4400	900	-	3	-	8,5	0,003	7,0	12	
35	6A7	6H7	Двойной триод	6,3	0,3	250	23	-	-	-2	1,6	70	4,4	-	1	-	3,2	2,8	3,5	10	
36	6A7	6H7	Двойной триод	6,3	0,6	250	9	-	-	-8	2,6	20	7,7	-	2,5	-	3,4	4,0	1,0	10	
37	6A7	6K17B	Пентод Вч Варимю	6,3	0,3	250	9,2	100	2,4	-3	2,0	1600	800	-	4	-	6	0,003	7	13	
38	6A7	6P7B	Двойной диод триод	6,3	0,3	250	0,9	-	-	-2	1,1	100	90	-	2,5	-	3,2	1,6	3,0	14	
39	6A7	6P7B	Двойной диод триод	6,3	0,3	250	9,5	-	-	-9	1,9	16	8,5	-	2,5	0,3	3,6	2,4	2,8	14	
40	6A7	6H10	Двойной триод	6,3	0,3	250	20	-	-	-2	1,4	70	5,0	-	2,2	-	2,2	2,0	3,0	16	
41	6A7	6K12B	Пентод Вч Варимю	6,3	0,3	250	11,8	12,5	4,4	-1	4,7	4200	900	-	3	-	8,5	0,003	7,0	12	
42	6A7	6X6	Двойной диод	6,3	0,3	125	4	-	-	-	-	-	-	-	-	-	-	-	-	10	
43	6A7	6A10	Пентод с самовозбуждением	6,3	0,3	250	2,4	100	7,1	-3,0	0,35	-	1000	-	1	-	7,5	0,005	11,0	15	
44	6A7	6A5B	Пентод-смеситель	6,3	0,3	250	2,4	100	6,5	-3	0,38	700	800	-	1,75	-	7,5	0,001	11,0	22	
45	6A7	6ДП1	Генератор тока телевизора	6,3	1,8	44	-	-	-	-200	+4	-	-	-	-	-	-	-	-	-	2,8
46	6A7	6ЖВ	Пентод малобаритный УВЧ	6,3	0,5	250	10	100	3,5	-2	7,5	1500	2000	-	2,5	-	9,5	0,03	6,25	8	
47	6A7	6П4	Оконечный пентод	6,3	0,4	250	3,3	250	5,5	-8	2,3	160	70	-	8,5	3,4	-	-	-	9	
48	6A7	6П4	Оконечный пентод	6,3	0,3	180	1,5	180	2,5	-9	2,3	-	175	-	8,5	1,1	5,5	9,5	7,0	9	
49	6A7	6С6	Оконечный триод	6,3	1,0	250	60	-	-	-4,5	9,3	4,2	0,8	2,5	1,5	3,5	7,5	1,6	5,5	2	
50	6A7	6С177	Триод-пентод	6,3	0,3	100	3,5	-	-	-3	0,45	8	1,8	-	-	-	2,5	2,0	3,0	7	
51	2C40		Триод УКВ маячковый	6,3	0,75	250	16,5	-	-	-	4,8	35	7,5	-	6,5	0,035	-	-	-	2	
52	2C43		Триод УКВ маячковый	6,3	0,9	300	2,6	-	-	-	9,0	4,5	5	-	-	-	-	-	-	-	
53	12A6	12П6	Лучевой тетрод	12,6	0,15	250	30	250	3,5	-12,5	3	-	70	-	1,5	3,4	9	0,3	2	9	
54	12A7-CT	12К11	Двойной триод	12,6	0,15	180	7,6	-	-	-6,5	1,9	16	8,4	-	7,5	-	9	3	8	11	
55	12A7-CT	12К11	Пентод универсальный	12,6	0,075	210	2,0	75	0,55	-2,3	1,5	2000	1400	-	8,0	-	-	-	-	10	
56	12A7-CT	12C2	Триод	12,6	0,15	250	9,0	-	-	-8	2,6	20	7,7	-	2,5	-	3,4	3,4	3,6	9	
57	12A7-CT	12H40	Двойной триод	12,6	0,15	250	2,0	-	-	-2	1,3	70	5,3	-	2,5	-	2,2	2,0	3,0	16	
58	12A7-CT	12K12B	Пентод Вч Варимю	12,6	0,15	250	9,2	150	3,4	-2,5	4,0	-	1000	-	3,0	-	8,5	0,003	7,0	12	
59	12A7-CT	12K17B	Пентод Вч	12,6	0,15	250	3,0	100	0,8	-3	1,65	2500	1500	-	2,5	-	6,0	0,005	7,0	13	
60	12A7-CT	12K17B	Пентод Вч Варимю	12,6	0,15	250	9,2	100	2,6	-3	2,0	1600	800	-	4,0	-	6,0	0,003	7,0	13	
61	12A7-CT	12P17B	Двойной диод-триод	12,6	0,15	250	0,9	-	-	-2	1,1	100	90	-	2,5	-	3,2	1,6	3,0	14	
62	12A7-CT	12P17B	Двойной диод-триод	12,6	0,15	250	9,5	-	-	-2	1,9	16									

ТАБЛИЦА ПРИЕМНОУСИЛИТЕЛЬНЫХ РАДИОЛАМП

№ п/п	Обозначение		Тип лампы	Накал		Анод		Экр сетка		Смещение	Кру. Коз	Внутр. сопр.	Внутр. нагр.	Сопр. нагр.	Мощн. расч.	Вых. мощн.	Емкости			Примечания		
	старое	новое		U _A	I _A	U _к	I _к	U _с	I _с								U _с	I _с	U _{св}		I _{св}	U _{св}
1	954	6КЖХ	Пентод УВЧ (жюльб)	6,3	0,15	250	2	100	0,7	-3	1,4	1700	1200	-	12	-	3,4	4007	3	29		
2	955	6СЖХ	Триод УВЧ (жюльб)	6,3	0,15	180	4,3	-	-	-5	2,0	25	12,5	20	1,5	0,15	1,0	4,4	1,6	3,0	30	
3	956	6КЖ	Пентод УВЧ Бариню (жюльб)	6,3	0,15	250	6,7	100	2,7	-3	1,8	1250	700	-	1,8	-	3,4	4007	3	29		
4	9002	6СВН	Триод миниатюрный	6,3	0,15	90	2,5	-	-	-2,5	1,7	2,5	174	-	1,6	-	3,4	4007	3	29		
5	9003	6К19П	Пентод Бариню миниат.	6,3	0,15	250	6,7	100	2,7	-3	1,8	1400	700	-	1,7	-	3,4	4007	3	29		
6	9004	6ДЖ	Диод УВЧ (жюльб)	6,3	0,15	117	5,8	-	-	-	-	-	-	-	-	-	-	-	-	-	4	
7		1А1П	Пентод-преобразователь	1,2	0,04	90	0,8	45	1,9	0	0,25	-	-	-	-	-	-	-	-	-	4	
8		1В1П	Диод-пентод низкой частоты	1,2	0,06	90	0,8	45	1,9	0	0,25	-	-	-	-	-	-	-	-	-	4	
9		1К1П	Пентод ВЧ Вариню	1,2	0,06	90	0,8	45	1,9	0	0,25	-	-	-	-	-	-	-	-	-	4	
10		2П1П	Оконечный пентод	1,2	0,12	90	0,5	90	2,1	-4,5	2,15	270	100	10	-	-	0,27	-	-	-	31	
11	6А8	6АВ5	Пентод-преобразователь	6,3	0,3	250	3	100	2,7	-3	0,51	100	360	-	1	-	12,5	4006	12,5	2,6		
12	6А7	6К155	Пентод УКВ Вариню	6,3	0,45	300	12,5	200	3,2	-3	3,0	3500	700	-	3	-	8,0	4015	5,0	1,3		
13	6А5	6К146	Пентод укв	6,3	0,45	300	10	150	2,5	-2	9	9000	1000	-	3	-	11	4005	5	1,3		
14	6А6	6АЖ5	Пентод укв миниатюрный	6,3	0,3	250	7	130	2	-8	5	4000	800	-	2	-	6,5	0,025	1,8	4		
15	6А6	6Ж-45	Телевизионный видео-пентод	6,3	0,65	300	30	150	7	-3	11	1430	130	-	9	3,0	13	406	7,5	1,2		
16	6В8	6ВВ8	Двухнодный диод пентод	6,3	0,3	250	9,0	125	2,3	-3	1,1	730	650	-	2,5	-	6	0,005	9	2,6		
17	6С5М	6С5	Триод	6,3	0,3	250	8,0	-	-	-6	2,0	20	10	10	2,5	0,25	3	2,0	1,1	3		
18	6Г1	6Р75	Двухнодный диод-триод	6,3	0,3	250	1,1	-	-	-3	1,2	70	58	-	2	-	3	1,5	4,5	2,4		
19	6Е5	6Е5	Электронный индикатор	6,3	0,3	250	0,1-5	-	-	-8(0)	0,8	20	25	1000	-	-	-	-	-	-	2,9	
20	6Г5	6С25	Триод	6,3	0,3	250	9	-	-	-8	2,6	20	7,7	-	2,5	-	4,2	3,8	5	3		
21	6Г6	6Н1П	Двухнодный триод миниатюр	6,3	0,45	150	3,0	-	-	-10	5,3	38	7,1	-	1,5	-	2,2	1,6	0,5	5		
22	6Г7	6Ж75	Пентод ВЧ	6,3	0,3	250	2	100	0,5	-3	1,2	1400	10	-	0,75	-	7	4045	12	6		
23	6Г7	6К75	Пентод ВЧ Вариню	6,3	0,3	250	7	100	1,7	-3	1,45	1200	800	-	2,25	0,2	7	4045	12	6		
24	6КВ	6Д1	Триод-вектор	6,3	0,3	250	2,5	100	6,0	-3	0,3	-	500	-	0,8	-	6	0,03	5	2,7		
25	6К9М	6К9	Пентод ВЧ Вариню	6,3	0,3	250	9	100	2,6	-3	2,0	1600	800	-	1,9	-	4,8	4005	7,1	8		
26	6Н7С	6Н7	Двухнодный триод класса В	6,3	0,8	300	3,5	-	-	0,1	3,2	35	23	8	1,9	10	4,3	2,4	5,4	2,1		
27	6П3	6Л3	Лучевой тетрод	6,3	0,9	250	7,8	250	7	-14	6,1	130	21	2,5	20,5	6,5	10	4,0	8	9		
28	6Р5	6С45	Триод	6,3	0,3	250	1	-	-	-2	1,6	100	63	-	0,4	0,06	2,2	2,0	3,2	2,3		
29	6Р6С	6Р6	Оконечный пентод	6,3	0,7	250	3,4	250	7	-16,5	2,5	200	80	7	10	3,2	8	0,5	6,5	9		
30	6Р6	6П2	Лучевой тетрод	6,3	0,45	250	4,5	250	4,5	-12,5	4,1	250	52	5	12	4,5	9,5	0,7	7,5	9		
31	6А7	6АВ5	Пентод-преобразователь	6,3	0,3	250	3,5	100	8,5	0	0,45	-	1000	-	1	-	9,5	4,0	1,2	1,5		
32	6С7	6Ж75	Пентод ВЧ	6,3	0,3	250	3,0	100	0,8	-3	1,65	2500	1500	-	2,5	-	6,0	0,005	7,0	1,3		
33	6С7	6К116	Пентод ВЧ	6,3	0,3	250	3,0	100	0,8	-3	1,65	2500	1500	-	2,5	-	6,0	0,005	7,0	1,3		
34	6С7	6Н9	Двухнодный триод	6,3	0,3	250	10,8	150	4,1	-1	4,9	4400	900	-	3	-	8,5	0,003	7,0	1,2		
35	6С7	6Н8	Двухнодный триод	6,3	0,3	250	2,3	-	-	-2,8	1,6	70	44	-	1	-	3,2	2,8	3,5	10		
36	6С7	6К75	Пентод ВЧ Вариню	6,3	0,6	250	9	-	-	8	2,6	20	7,7	-	2,5	-	9	2,0	1,0	10		
37	6С7	6Р75	Двухнодный диод триод	6,3	0,3	250	9,2	100	2,4	-3	2,0	1600	800	-	4	-	6	0,003	7	1,3		
38	6С7	6Р75	Двухнодный диод триод	6,3	0,3	250	0,9	-	-	-2	1,1	100	90	-	2,5	-	3,2	1,6	3,0	1,4		
39	6С7	6Н10	Двухнодный триод	6,3	0,3	250	3,5	-	-	-9	1,9	16	8,5	-	2,5	0,3	3,6	2,4	2,8	1,4		
40	6С7	6К125	Пентод ВЧ Вариню	6,3	0,3	250	2,0	-	-	-2	1,4	70	50	-	-	-	2,2	2,0	3,0	1,6		
41	6С7	6Х6	Двухнодный диод	6,3	0,3	125	4	-	-	-1	4,7	4200	900	-	3	-	8,5	0,003	7,0	1,2		
42	6С7	6А10	Пентод с самовозбуждением	6,3	0,3	250	2,4	100	7,1	-3,0	0,35	-	1000	-	1	-	7,5	0,005	7,0	1,5		
43	6С7	6А5	Пентод-смеситель	6,3	0,3	250	2,4	100	6,5	-3	0,38	700	800	-	1,75	-	7,5	0,005	7,0	1,5		
44	6С7	6Д1П	Генератор тока телевизиион	6,3	1,8	44	-	-	-	-200	4,4	-	-	-	-	-	-	7,5	0,001	1,0	2,2	
45	6С7	6ЖВ	Пентод малогабаритный УВЧ	6,3	0,5	250	10	100	2,5	-24	7,5	1500	2000	-	2,5	-	9,5	0,03	6,25	8		
46	6К6	6П7	Оконечный пентод	6,3	0,4	250	3,3	250	5,5	-8	2,3	160	70	-	8,5	3,4	-	-	-	9		
47	6С6С	6П4	Оконечный пентод	6,3	0,3	180	1,5	180	2,5	-9	2,3	-	175	-	8,75	1,1	5,5	9,5	7,0	9		
48	6А4С	6С6	Оконечный триод	6,3	1,0	250	6,0	-	-	-4,5	5,3	42	0,8	2,5	1,5	3,5	7,5	1,6	5,5	2		
49	6Г7	6С177	Триод-пентод	6,3	0,3	100	3,5	-	-	-3	0,45	8	1,8	-	-	-	2,5	2,0	3,0	7		
50	6С7	6С7	Пентод	6,3	0,3	250	6,5	100	1,5	-3	1,1	900	850	-	-	-	3,2	4007	12,0	2		
51	2С40		Триод УКВ маячковый	6,3	0,75	250	16,5	-	-	-	4,8	35	7,5	-	6,5	0,035	-	-	-	-	2	
52	2С43		Триод УКВ маячковый	6,3	0,9	300	2,6	-	-	-	3,0	4,5	5	-	-	-	-	-	-	-	2	
53	12А6	12П6	Лучевой тетрод	12,6	0,15	250	3,0	250	3,5	-12,5	3	-	70	-	7,5	3,4	9	0,3	9	9		
54	12А7-С	12Н1	Двухнодный триод	12,6	0,15	180	7,6	-	-	-6,5	1,9	16	8,4	-	1,5	-	9	3	3	11		
55	12А7-С	12Ж1П	Пентод универсальный	12,6	0,15	250	2,0	7,5	0,53	-2,3	1,5	2000	1400	-	2,0	-	2,0	-	-	1,8		
56	12С2		Триод	12,6	0,15	250	2,0	-	-	-8	2,6	20	7,7	-	2,5	-	3,4	3,4	3,6	3		
57	12С7	12Н10	Двухнодный триод	12,6	0,15	250	2,0	-	-	-2	1,3	70	5,3	-	3,0	-	6,5	0,003	7,0	1,2		
58	12С7	12К125	Пентод ВЧ Вариню	12,6	0,15	250	2,0	-	-	-2	1,3	70	5,3	-	3,0	-	6,5	0,003	7,0	1,2		
59	12С7	12Ж175	Пентод ВЧ	12,6	0,15	250	9,2	150	3,4	-2,5	4,0	-	1000	-	2,5	-	6,0	0,005	7,0	1,3		
60	12С7	12К175	Пентод ВЧ Вариню	12,6	0,15	250	3,0	100	0,8	-3	1,65	2500	1500	-	2,5	-	6,0	0,005	7,0	1,3		
61	12С7	12Р175	Двухнодный диод-триод	12,6	0,15	250	9,2	100	2,6	-3	2,0	1600	800	-	4,0	-	6,0	0,003	7,0	1,3		

Enclosure

ТАБЛИЦА ПРИЕМНОУСИЛИТЕЛЬНЫХ РАДИОЛАМП

№ п/п	Обозначение		Тип лампы	Накал		Анод		Экр. сетка		См. элемент	Кру. диаметр	Коз. диаметр	Внутр. сопр. диаметр	Сопр. нагр.	Мощн. вых.	Вход. сопротивление	Емкости			Примечания			
	старое	новое		Ц ₁	J ₁	Ц ₂	J ₂	Ц ₃	J ₃								Е ₁	S	R		R ₀	R ₁	C ₁
				V	A	V	mA	V	mA	V	mm	mm	mm	mm	W	Ω	пФ	пФ	пФ				
1	954	6Ж1Ж	Пентод УВЧ (желез)	6,3	0,15	250	2	100	0,7	-3	1,4	1700	1200	-	12	-	3,4	600	3	29			
2	955	6С1Ж	Триод УВЧ (желез)	6,3	0,15	180	4,3	-	-3	2,0	2,3	12,5	20	1,5	0,13	4,0	1,4	0,6	3,0				
3	958	6Ж1Ж	Пентод УВЧ Варимю (желез)	6,3	0,15	250	6,7	100	2,7	-3	1,8	1250	700	-	12	-	3,4	600	3	29			
4	9002	6С8П	Триод миниатюрный	6,3	0,18	90	2,5	-	-2,5	1,7	2,5	17,4	-	1,6	-	1,2	1,1	1,4	4				
5	9003	6К19П	Пентод Варимю миниат	6,3	0,15	250	6,7	100	2,7	-3	1,8	1400	700	-	12	-	3,4	600	3	29			
6	9004	6Д1Ж	Диод УВЧ (желез)	6,3	0,15	117	5,8	-	-	-	-	-	-	1,7	-	3,4	600	3	29				
7		1А1П	Пентод-преобразователь	1,2	0,06	90	0,8	45	1,9	0	0,25	-	800	-	-	-	4,3	-	-	1			
8		1Б1П	Диод-пентод низкой частоты	1,2	0,06	90	-	3мА	0	0	0	50 ^{mm}	-	1000	-	-	-	-	-	1			
9		1К1П	Пентод ВЧ Варимю	1,2	0,06	90	1,8	45	0,65	0	0,75	-	800	-	-	-	-	-	-	31	Внимание! В работе лампы М. Железные на СССР.		
10		2П1П	Оконечный пентод	1,2	0,12	90	9,5	90	2,1	-4,5	2,15	270	100	10	-	0,27	-	-	-	31	Внимание! В работе лампы М. Железные на СССР.		
11	6А8	6А8Б	Пентод-преобразователь	6,3	0,3	250	3	100	2,7	-3	0,51	100	360	-	1	-	12,5	600	12,5	26	Внимание! В работе лампы М. Железные на СССР.		
12	6А87	6К15Б	Пентод УКВ Варимю	6,3	0,45	300	12,5	200	3,2	-3	5,0	3500	700	-	3	-	11	6000	5	13	Внимание! В работе лампы М. Железные на СССР.		
13	6А87	6Ж14Б	Пентод УКВ	6,3	0,45	300	10	150	2,5	-2	9	9000	1000	-	3	-	11	6000	5	13	Внимание! В работе лампы М. Железные на СССР.		
14	6А85	6АЖ5	Пентод УКВ миниатюрный	6,3	0,3	250	7	150	2	-8	5	4000	800	-	2	-	6,5	0,025	1,8	4	Внимание! В работе лампы М. Железные на СССР.		
15	6А87	6Ж15	Телевизионный видео-пентод	6,3	0,65	300	30	150	7	-3	11	1430	130	-	9	3,0	13	0,06	7,5	12	Внимание! В работе лампы М. Железные на СССР.		
16	6А8	6Б8Б	Двойной диод пентод	6,3	0,3	250	9,0	125	2,3	-3	1,1	730	650	-	2,5	-	6	0,005	9	26	Внимание! В работе лампы М. Железные на СССР.		
17	6С3М	6С5	Триод	6,3	0,3	250	8,0	-	-8	2,0	2,0	10	10	2,5	0,25	3	2,0	1,1	3				
18	6Г7	6Р7Б	Двойной диод-триод	6,3	0,3	250	1,1	-	-3	1,2	7,0	58	-	2,5	-	3	1,5	4,5	2,4	3			
19	6С7	6С5	Электронный индикатор	6,3	0,3	250	0,1-5	-	-8	0,8	2,0	2,5	1000	-	-	-	-	-	-	2,9			
20	6Л5	6С2Б	Триод	6,3	0,3	250	9	-	-8	2,6	2,0	7,7	-	2,5	-	-	-	-	3,8	5	3		
21	6Л6	6Н1П	Двойной триод миниатюр	6,3	0,45	150	30	-	-10	5,3	3,8	11	-	1,5	-	2,2	2,6	1,0	4	5		Внимание! В работе лампы М. Железные на СССР.	
22	6Л7	6Ж7Б	Пентод ВЧ	6,3	0,3	250	2	100	0,5	-3	1,2	1400	12	-	0,75	-	-	-	7	8			
23	6К7	6К7Б	Пентод ВЧ Варимю	6,3	0,3	250	7	100	1,7	-3	1,5	1200	800	-	2,25	0,2	7	6,0	0,05	1,2	8		
24	6К8	6Д1	Триод-вектор	6,3	0,3	250	2,5	100	6,0	-3	0,3	-	800	-	0,5	-	6	0,03	5	27			
25	6К9М	6К9	Пентод ВЧ Варимю	6,3	0,3	250	9	100	2,6	-3	2,0	1600	800	-	3	-	6,5	0,005	7,0	13			
26	6Л7С	6Н1	Двойной триод класса В	6,3	0,8	300	35	0	0	3,2	3,5	25	80	11	10	2,3	2,4	5,4	21			Внимание! В работе лампы М. Железные на СССР.	
27	6П3	6Л3	Лучевой тетрод	6,3	0,9	250	7,8	250	7	-1,4	6,1	130	21	2,5	20,5	6,5	10	4,0	8	9			
28	6П5	6С4Б	Триод	6,3	0,3	250	1	-	-2	1,6	1,0	63	-	0,4	0,06	2,2	2,8	3,2	2,3				
29	6Ф8С	6П2	Оконечный пентод	6,3	0,7	250	3,4	250	7	-16,5	2,5	200	80	7	10	3,2	8	0,5	6,5	9			
30	6В8	6П2	Лучевой тетрод	6,3	0,45	250	4,5	250	4,5	-12,5	4,1	250	52	5	12	4,5	9,5	0,7	7,5	9			
31	6А7	6А15Б	Пентод-преобразователь	6,3	0,3	250	3,5	100	8,5	0	0,45	-	1000	-	1	-	9,5	0,03	1,2	15			
32	6С17	6Ж17Б	Пентод ВЧ	6,3	0,3	250	3,0	100	0,8	-3	1,65	2500	1500	-	2,5	-	6,0	0,005	7,0	13			
33	6С17	6Ж17Б	Пентод ВЧ	6,3	0,3	250	10,8	100	4,1	-1	4,9	4400	900	-	3	-	8,5	0,005	7,0	12			
34	6С17	6Ч3	Двойной триод	6,3	0,3	250	2,3	-	-2,4	1,6	7,0	4,4	-	1	-	3,2	2,8	3,5	10			Внимание! В работе лампы М. Железные на СССР.	
35	6С17	6Ч3	Двойной триод	6,3	0,6	250	9	-	-8	2,6	2,0	7,7	-	2,5	-	3,4	4,0	1,0	10			Внимание! В работе лампы М. Железные на СССР.	
36	6С17	6К17Б	Пентод ВЧ Варимю	6,3	0,3	250	9,2	100	2,4	-3	2,0	1600	800	-	4	-	6	0,003	7	13			
37	6С17	6Р17Б	Двойной диод триод	6,3	0,3	250	0,9	-	-2	1,1	10,0	9,0	-	2,5	-	3,2	1,6	3,0	14				
38	6С17	6Р17Б	Двойной диод триод	6,3	0,3	250	9,5	-	-2	1,9	1,6	8,5	-	2,5	0,3	3,6	2,4	2,8	14				
39	6С17	6Н10	Двойной триод	6,3	0,3	250	2,0	-	-9	1,4	7,0	5,0	-	2,5	-	2,2	2,0	3,0	16			Внимание! В работе лампы М. Железные на СССР.	
40	6С17	6К12Б	Пентод ВЧ Варимю	6,3	0,3	250	11,8	125	4,4	-1	4,7	4200	900	-	3	-	8,5	0,003	7,0	12			
41	6К6М	6К6	Двойной диод	6,3	0,3	125	4,8	-	-3	0,45	8	180	-	-	-	-	-	-	-	7			
42	6А7С7	6А10	Пентод-триод с самовозбуждением	6,3	0,3	250	2,4	100	7,1	-3,0	0,35	-	1000	-	1	-	7,5	0,005	11,0	15		Внимание! В работе лампы М. Железные на СССР.	
43	6Л7	6А5Б	Пентод-смеситель	6,3	0,3	250	2,4	100	6,5	-3	0,38	700	300	-	1,75	-	7,5	0,005	11,0	15		Внимание! В работе лампы М. Железные на СССР.	
44	6С-111	6ДП7	Генератор тока телевизора	6,3	1,8	44	-	-	-	2,0	1,4	-	-	-	5	-	7,5	0,001	11,0	2,2		Внимание! В работе лампы М. Железные на СССР.	
45	6С20	6ЖВ	Пентод малогабаритный УВЧ	6,3	0,5	250	10	100	2,5	-2,4	7,5	15000	2000	-	2,5	-	9,5	0,03	6,25	8			
46	6К6	6П1	Оконечный пентод	6,3	0,4	250	3,3	250	5,5	-8	2,3	160	70	-	8,5	3,4	-	-	-	9			
47	6С6-6	6П4	Оконечный пентод	6,3	0,3	180	15	180	2,5	-9	2,3	-	175	-	8,75	1,1	5,5	9,5	7,0	9			
48	6А4-6	6С6	Оконечный триод	6,3	1,0	250	6,0	-	-4,5	5,3	4,2	0,8	2,5	-	7,5	3,5	7,5	1,6	5,5	2			
49	6Ф7	6С177	Триод-пентод	6,3	0,3	100	3,5	-	-3	0,45	8	180	-	-	-	-	-	-	-	7			
50			Пентод	6,3	0,25	250	6,5	100	1,5	-3	1,1	900	850	-	-	-	2,5	2,0	3,0	7			
51	2С40		Триод УВЧ маячковый	6,3	0,75	250	16,5	-	-	4,8	3,5	7,5	-	6,5	0,035	-	-	-	-	2			
52	2С43		Триод УКВ маячковый	6,3	0,9	300	2,6	-	-	9,0	4,5	5	-	-	-	-	-	-	-	-			
53	12А6	12П6	Лучевой тетрод	12,6	0,15	250	3,0	250	3,5	-12,5	3	-	-	7,5	3,4	9	0,3	9	9				
54	12А7-6Т	12Н1	Двойной триод	12,6	0,15	180	7,6	-	-4,5	1,9	1,6	8,4	-	1,5	-	9	9	8	11				
55	12А7-6Т	12Н1	Пентод универсальный	12,6	0,15	180	7,6	-	-4,5	1,9	1,6	8,4	-	1,5	-	9	9	8	11				
56	12С5-6Т	12С2	Триод	12,6	0,075	210	2,0	75	0,55	-2,3	1,5	2000	1400	-	2,0	-	-	-	-	1,6			
57	12С67	12Н10	Двойной триод	12,6	0,15	250	9,0	-	-8	2,6	2,0	7,7	-	2,5	-	3,4	3,4	3,6	3				
58	12С67	12К12Б	Пентод ВЧ Варимю	12,6	0,15	250	9,2	150	3,4	-2,5	4,0	-	1000	-	3,0	-	8,2	2,0	3,0	16			
59	12С67	12К17Б	Пентод ВЧ	12,6	0,15	250	9,2	100	0,8	-3	1,65	2500	1500	-	2,5	-	6,0	0,005	7,0	12			
60	12С67	12К17Б	Пентод ВЧ Варимю	12,6	0,15	250	9,2	100	2,6	-3	2,0	1600	800	-	4,0	-	6,0	0,005	7,0	13			
61	12С67	12Р17Б	Двойной диод-триод	12,6	0,15	250	0,9	-	-2	1,1	10,0	9,0	-	2,5	-	3,2	1,6	3,0	14				
62	12С67	12Р17Б	Двойной диод-триод	12,6	0,15	250	9,5	-	-9	1,9	1,6	8,5	-	2,5	0,3	3,6	2,4	2,8	14				
63	12С-1		Триод генераторный ЦВ	12,6	0,1	300	-	-	-	5	1,1	-	-	2,5	-	3,6	2,4	2,8	14				
64	12С-1		Триод генераторный ЦВ	12,6	0,1	300	-	-	-	5	1,1	-	-	2,5	-	3,6	2,4	2,8	14				
65	6С2		Двойной пентод генераторный	6,3	0,2	500	240	200	3,2	-4,5	-	-	-	4,0	2,3	10	0,04	2,5	-			Внимание! В работе лампы М. Железные на СССР.	
66	6С2		Двойной пентод генераторный	6,3	0,2	500	720	200	1,7	-6,5	-	-	-	15	2,6	-	-	-	-	-		Внимание! В работе лампы М. Железные на СССР.	
67	F-411	ЮК1	Пентод генераторный	10	0,6	400	9,5	250	5	-30	5,5	2,0	110	-									

ТАБЛИЦА ПРИЕМНОУСИЛИТЕЛЬНЫХ РАДИОЛАМП

№ п/п	Обозначение		Тип лампы	Накал		Анод		Экр. сетка		Смещение	Кру. уш.	Кол. уш.	Внут. сопр.	Сопр. напр.	Полн. расщ. анод	Вых. мощ.	Вых. Р	Емкости			Примечания	
	старое	новое		U _A	I _A	U _A	I _A	U _с	I _с									E _с	S	M		R _с
1	954	6Ж1Ж	Пентод УВ4 (жолуы)	6,3	0,15	250	2	100	0,7	-3	1,4	1700	1200	-	12	-	3,4	4007	3	29		
2	955	6С1Ж	Триод УВ4 (жолуы)	6,3	0,15	180	4,3	-	-	-5	2,0	2,5	12,5	20	1,5	0,75	1,0	4,4	9,6	3,0		
3	956	6К1Ж	Пентод УВ4 Варимю (жолуы)	6,3	0,15	250	6,7	100	2,7	-3	1,5	12,5	700	-	12	-	3,4	4007	3	29		
4	9002	6СВ1П	Триод миниатюрный	0,3	0,16	90	2,5	-	-	-2,5	1,7	2,5	174	-	1,6	-	1,2	1,1	1,4	6		
5	9003	6К19П	Пентод Варимю миниат	6,3	0,15	250	6,7	100	2,7	-3	1,8	1400	700	-	1,7	-	3,4	4007	3	29		
6	9004	6Д1Ж	Диод УВ4 (жолуы)	6,3	0,15	117	0,8	-	-	-	-	-	-	-	-	-	-	-	-	1,3		
7		1А1П	Генлок-преобразователь	1,2	0,05	90	0,8	45	4,9	0	0,25	-	800	-	-	-	-	-	-	-		
8		1Б1П	Диод-пентод низкой частоты	1,2	0,06	90	0,8	45	0,65	0	0,75	-	800	-	-	-	-	-	-	-		
9		1К1П	Пентод В4 Варимю	1,2	0,06	90	1,5	90	2,1	-4,5	2,15	270	100	10	-	0,27	-	-	-	-		
10		2П1П	Оконечный пентод	1,2	0,12	90	2,5	90	2,1	-4,5	2,15	270	100	10	-	0,27	-	-	-	-		
11	6А8	6А8Б	Генлок-преобразователь	6,3	0,3	250	3	100	2,7	-3	0,51	100	360	-	1	-	12,5	4006	12,5	2,6		
12	6А87	6К15Б	Пентод УКВ Варимю	6,3	0,45	300	12,5	200	3,2	-3	5,0	3500	700	-	3	-	8,0	6015	5,0	1,3		
13	6А87	6Ж1Б	Пентод УКВ	6,3	0,45	300	10	150	2,5	-2	9	9000	1000	-	3	-	11	4008	5	1,3		
14	6А85	6АЖБ	Пентод УКВ миниатюрный	6,3	0,3	250	7	150	2	-8	5	4000	800	-	2	-	6,5	0,025	1,8	4		
15	6А87	6Ж1Б	Телевизионный видео-пентод	6,3	0,65	300	30	150	7	-3	11	1430	130	-	9	3,0	13	0,06	2,5	1,2		
16	6В8	6В8Б	Двухногий диод пентод	6,3	0,3	250	3,0	125	2,3	-3	11	730	650	-	2,5	-	6	0,005	9	2,6		
17	6С9М	6С5	Триод	6,3	0,3	250	8,0	-	-	-8	2,0	2,0	10	10	2,5	0,25	3	2,0	1,1	3		
18	6Г1	6Р7Б	Двойной диод-триод	6,3	0,3	250	1,1	-	-	-3	1,2	70	58	-	2	-	1,5	4,5	2,4	2,4		
19	6Е5	6Е5	Электронный индикатор	6,3	0,3	250	0,1-5	-	-	-8(0)	0,8	2,0	2,5	1000	-	-	-	-	-	-	2,4	
20	6Г8	6С2Б	Триод	6,3	0,3	250	9	-	-	-8	2,6	2,0	7,7	-	2,5	-	4,2	3,8	5	3		
21	6Г8	6Н1П	Двойной триод миниатюр	6,3	0,45	150	3,0	-	-	-10	5,3	3,8	7,1	-	1,5	-	2,2	1,6	0,4	5		
22	6Г7	6Ж7Б	Пентод В4	6,3	0,3	250	2	100	0,5	-3	1,2	1400	42	-	0,75	-	7	2,9	1,2	8		
23	6К7	6К7Б	Пентод В4 Варимю	6,3	0,3	250	7	100	1,7	-3	1,45	1200	800	-	2,25	0,2	7	4,0	1,2	8		
24	6К8	6Д1	Триод-вектор	6,3	0,3	250	2,5	100	2,0	-3	2,0	1600	800	-	0,5	-	6	0,03	5	2,7		
25	6К9М	6К9	Пентод В4 Варимю	6,3	0,3	250	9	100	2,6	-3	3,2	35	23	8	11	10	4,3	2,4	5,4	2,1		
26	6Н7С	6Н7	Двойной триод класса В	6,3	0,8	300	3,5	100	6,0	-3	2,0	1600	800	-	3	-	4,8	4,0	1,1	8		
27	6П7	6П3	Лучевой тетрод	6,3	0,9	250	7,8	250	7	-1,4	6,1	130	21	2,5	20,5	6,5	7,0	4,7	0,4	2,1		
28	6П8	6С4Б	Триод	6,3	0,3	250	1	-	-	-2	1,6	100	63	-	0,4	0,06	2,2	2,8	3,2	2,3		
29	6П8	6П2	Оконечный пентод	6,3	0,45	250	3,4	250	7	-16,5	2,5	200	80	7	10	3,2	8	0,5	6,5	9		
30	6П8	6П2	Лучевой тетрод	6,3	0,45	250	4,5	250	4,5	-12,5	4,1	250	52	5	12	4,5	3,5	0,7	7,5	9		
31	6Ж7	6Ж7Б	Пентод В4	6,3	0,3	250	3,5	100	8,5	0	0,45	-	1000	-	1	-	3,5	4,0	1,2	15		
32	6Ж7	6Ж1Б	Пентод В4	6,3	0,3	250	3,0	100	0,8	-3	1,65	2500	1500	-	2,5	-	6,0	0,005	7,0	1,3		
33	6Ж7	6Н9	Двойной триод	6,3	0,3	250	10,8	150	4,1	-1	4,9	4400	900	-	3	-	8,5	0,003	7,0	1,2		
34	6Ж7	6Н9	Двойной триод	6,3	0,3	250	9,3	150	4,1	-1	4,9	4400	900	-	3	-	8,5	0,003	7,0	1,2		
35	6Ж7	6Н8	Двойной триод	6,3	0,6	250	9,3	150	4,1	-1	4,9	4400	900	-	3	-	8,5	0,003	7,0	1,2		
36	6Ж7	6К7Б	Пентод В4 Варимю	6,3	0,6	250	9,3	150	4,1	-1	4,9	4400	900	-	3	-	8,5	0,003	7,0	1,2		
37	6Ж7	6Р7Б	Двойной диод-триод	6,3	0,3	250	9,2	100	2,4	-3	2,0	1600	800	-	4	-	3,4	4,0	1,0	10		
38	6Ж7	6Р7Б	Двойной диод-триод	6,3	0,3	250	0,9	-	-	-2	1,1	100	90	-	2,5	-	6	0,003	7	1,3		
39	6Ж7	6Н10	Двойной триод	6,3	0,3	250	9,5	-	-	-2	1,9	16	8,5	-	2,5	0,3	3,2	1,6	3,0	1,4		
40	6Ж7	6К12Б	Пентод В4 Варимю	6,3	0,3	250	20	100	6,0	-3	2,4	70	50	-	2,2	2,0	3,0	1,6	1,0	16		
41	6Ж8М	6-6	Двойной диод	6,3	0,3	250	11,8	12,5	4,4	-1	4,7	4200	900	-	3	-	8,5	0,003	7,0	1,2		
42	6Ж8М	6А70	Пентод с самовозбужден	6,3	0,3	125	4,9	-	-	-	-	-	-	-	-	-	-	0,02	-	-	19	
43	6Ж7	6А3Б	Пентод-смеситель	6,3	0,3	250	2,4	100	7,1	3,0	0,35	-	1000	-	1	-	7,5	0,005	11,0	1,5		
44	6Ж7	6Д1П7	Генератор тока телевизон	6,3	0,3	250	2,4	100	6,5	3	0,38	700	800	-	1,75	-	7,5	0,001	11,0	2,2		
45	6Ж7	6ЖВ	Пентод малобаритный УВ4	6,3	1,8	44	-	-	-	2,00	+4,4	-	-	-	5	-	-	-	-	-	2,8	
46	6Ж8	6П7	Оконечный пентод	6,3	0,4	250	3,3	250	5,5	-8	2,3	160	70	-	2,5	-	3,5	0,03	6,25	8		
47	6С6-6	6П4	Оконечный пентод	6,3	0,3	180	15	180	2,5	-9	8,3	-	175	-	8,5	3,4	-	-	-	-	9	
48	6В4-6	6С6	Оконечный триод	6,3	1,0	250	60	-	-	-4,5	5,3	4,2	0,8	2,5	1,5	3,5	7,5	1,6	5,0	2		
49	6Ф7	6С177	Триод-пентод	6,3	0,3	100	3,5	-	-	-3	0,45	8	18	-	-	-	2,5	2,0	3,0	7		
51	2С40		Триод УКВ малочкавы	6,3	0,75	250	16,5	-	-	-	4,8	35	7,5	-	6,5	0,035	-	-	-	-	12	
52	2С43		Триод УКВ малочкавы	6,3	0,9	300	2,6	-	-	-	9,0	4,5	5	-	-	-	-	-	-	-	3,0	
53	12А6	12П6	Лучевой тетрод	12,6	0,15	250	3,0	250	3,5	-12,5	3	-	7	-	7,5	3,4	9	0,3	9	9		
54	12А7-6Т	12К11	Двойной триод	12,6	0,15	180	7,6	-	-	-4,5	1,9	1,6	8,4	-	1,5	-	3	3	3	11		
55	12А7-6Т	12К11	Пентод универсальный	12,6	0,15	180	7,6	-	-	-4,5	1,9	1,6	8,4	-	1,5	-	3	3	3	11		
56	12С5Т	12С2	Триод	12,6	0,075	210	2,0	75	0,55	-2,3	1,5	2000	1400	-	2,0	-	-	-	-	-	1,8	
57	12С5Т	12Н10	Двойной триод	12,6	0,15	250	9,0	-	-	-8	2,6	2,0	7,7	-	2,5	-	3,4	3,4	3,6	3		
58	12С6Т	12К12Б	Пентод В4 Варимю	12,6	0,15	250	9,2	150	3,4	-2,5	4,0	-	1000	-	3,0	-	8,2	2,0	3,0	1,6		
59	12С7Т	12К17Б	Пентод В4	12,6	0,15	250	9,2	100	4,8	-3	7,65	2500	1500	-	2,5	-	6,0	0,005	7,0	1,3		
60	12С7Т	12К17Б	Пентод В4 Варимю	12,6	0,15	250	9,2	100	4,8	-3	7,65	2500	1500	-	2,5	-	6,0	0,005	7,0	1,3		
61	12С7Т	12Р17Б	Двойной диод-триод	12,6	0,15	250	9,2	100	4,8	-3	7,65	2500	1500	-	2,5	-	6,0	0,005	7,0	1,3		
62	12С7Т	12Р17Б	Двойной диод-триод	12,6	0,15	250	9,2	100	4,8	-3	7,65	2500	1500	-	2,							

ТАБЛИЦА ПРИЕМНОУСИЛИТЕЛЬНЫХ РАДИОЛАМП

№ п/п	Обозначение		Тип лампы	Накал		Анод		Экр. сетка		См. - управляющая	Кру. - крутизна	Коз. - коэффициент	Внут. сопр.	Внеш. сопр.	Мощн. вх.	Вых. мощн.	Емкости			Примечания	
	старое	новое		U _г	I _г	U _а	I _а	U _с	I _с								U _с	I _с	U _{св}		U _{св}
1	954	6Ж1Х	Пентод УВЧ (желез)	6,3	0,15	250	2	100	0,7	-3	1,4	1700	1200	-	12	-	34	5007	5	20	
2	955	6С1Х	Триод УВЧ (желез)	6,3	0,15	180	4,3	-	-	-5	2,0	251	12,3	20	1,5	0,13	10	44	9,6	3,9	
3	956	6Ж1Ж	Пентод УВЧ Бариню (желез)	6,3	0,15	250	6,7	100	2,7	-3	1,8	1250	700	-	12	-	34	5007	5	20	
4	9002	6С8П	Триод миниатюрный	6,3	0,15	90	2,5	-	-	-2,5	1,7	25	174	-	1,6	-	12	1,1	1,4	6	
5	9003	6К19П	Пентод Бариню миниат.	6,3	0,15	250	6,7	100	2,7	-3	1,8	1400	700	-	1,7	-	34	5007	5	4	
6	9004	6Д1Ж	Диод УВЧ (желез)	6,3	0,15	117	5,5	-	-	0	0,25	-	-	-	-	-	-	-	-	-	
7		1А1П	Гелтод-преобразователь	1,2	0,06	90	0,8	45	1,9	0	0	150 ^m	-	1000	-	-	-	-	-	-	
8		1Б1П	Диод-пентод низкой частоты	1,2	0,06	90	0,8	45	1,9	0	0	150 ^m	-	1000	-	-	-	-	-	-	
9		1К1П	Пентод ВЧ Вариню	1,2	0,06	90	0,8	45	1,9	0	0	150 ^m	-	1000	-	-	-	-	-	-	
10		2П1П	Оконечный пентод	1,2	0,06	90	0,8	45	1,9	0	0	150 ^m	-	1000	-	-	-	-	-	-	
11	6А8	6А8Б	Гелтод-преобразователь	6,3	0,3	250	3	100	2,7	-3	0,81	100	360	-	1	3	12,5	500	5,0	13	
12	6А8В	6К15Б	Пентод УКВ Вариню	6,3	0,45	300	12,5	200	3,2	-3	3,0	3500	700	-	3	-	71	5000	5	13	
13	6А8Г	6Ж14Б	Пентод укв	6,3	0,45	300	10	150	2,5	-2	9	9000	1000	-	3	-	71	5000	5	13	
14	6А8Д	6АЖ5	Пентод УКВ миниатюрный	6,3	0,3	250	7	150	2	-8	5	4000	800	-	2	-	6,5	0,025	1,8	4	
15	6А8Е	6Ж45	Телевизионный видео-пентод	6,3	0,65	300	30	150	7	-3	11	1430	130	-	9	3,0	13	0,06	7,5	12	
16	6А8Ж	6В8В	Двойной диод пентод	6,3	0,3	250	9,0	125	2,3	-3	11	730	650	-	2,5	-	6	0,005	9	2,6	
17	6С3М	6С5	Триод	6,3	0,3	250	8,0	-	-	-8	2,0	20	10	10	2,5	0,25	3	2,0	11	3	
18	6Г7	6Р7Б	Двойной диод-триод	6,3	0,3	250	11	-	-	-3	1,2	70	58	-	2	-	8	1,5	4,5	2,4	
19	6Е5	6Е5	Электронный индикатор	6,3	0,3	250	0,1-5	-	-	-8(0)	0,8	20	25	1000	-	-	-	-	-	-	
20	6Г8	6С2Б	Триод	6,3	0,3	250	9	-	-	-8	2,6	20	7,7	-	2,5	-	4,2	3,8	5	3	
21	6Г6	6Н1П	Двойной триод миниатюр	6,3	0,45	150	3,0	-	-	-10	5,3	38	7,1	-	1,5	-	2,2	1,6	0,4	5	
22	6Г7	6Ж7Б	Пентод ВЧ	6,3	0,3	250	2	100	0,5	-3	1,2	1400	12	-	0,75	-	7	5,0	12	8	
23	6К7	6К7Б	Пентод ВЧ Вариню	6,3	0,3	250	7	100	1,7	-3	1,45	1200	800	-	2,25	0,2	7	5,0	12	8	
24	6К8	6Д1	Триод-вакуум	6,3	0,3	250	2,5	100	2,0	-3	0,3	-	-	-	0,8	-	6	0,03	5	2,7	
25	6К9М	6К9	Пентод ВЧ Вариню	6,3	0,3	250	9	100	2,0	-3	2,0	1600	800	-	0,8	-	4,8	5,0	11	8	
26	6Н7С	6Н7	Двойной триод класса В	6,3	0,8	300	3,5	-	-	0	3,2	35	23 ^m	8	11 ^m	10 ^m	4	2,4	5,4	21	
27	6П3	6П3	Лучевой тетрод	6,3	0,9	250	7,8	250	7	-14	6,1	130	21	2,5	20,5	6,5	10	4,7	8	9	
28	6П6	6С4Б	Триод	6,3	0,3	250	1	-	-	-2	1,6	100	63	-	0,4	0,06	2,2	2,8	3,2	2,3	
29	6П6С	6П2	Оконечный пентод	6,3	0,7	250	3,4	250	7	-16,5	2,5	200	80	7	10	3,2	8	0,5	0,5	9	
30	6П6	6П2	Лучевой тетрод	6,3	0,45	250	4,5	250	4,5	-12,5	4,1	250	52	5	12	4,5	9,5	0,7	1,5	9	
31	6А17	6А15Б	Гелтод-преобразователь	6,3	0,3	250	3,5	100	8,5	0	0,45	-	1000	-	1	-	9,5	2,0	1,2	1,5	
32	6А17	6Ж17Б	Пентод ВЧ	6,3	0,3	250	3,0	100	0,8	-3	1,65	2800	1500	-	2,5	-	6,0	0,005	7,0	13	
33	6Н17	6Ж11Б	Пентод ВЧ	6,3	0,3	250	3,0	100	0,8	-1	4,9	4400	900	-	3	-	6,5	0,003	7,0	12	
34	6С17	6Н8	Двойной триод	6,3	0,3	250	2,3 ^m	-	-	-2	1,6	70	44 ^m	-	1	-	3,2	2,8	3,5	10	
35	6С17	6Н8	Двойной триод	6,3	0,3	250	2,3 ^m	-	-	-8 ^m	2,6	20 ^m	7,7 ^m	-	2,5	-	3,8	4 ^m	1,0	10	
36	6С17	6К17Б	Пентод ВЧ Вариню	6,3	0,3	250	3,2	100	2,4	-3	2,0	1600	800	-	4	-	6	0,003	7	13	
37	6С17	6Р17Б	Двойной диод-триод	6,3	0,3	250	0,9	-	-	-2	1,1	100	90	-	2,5	-	3,2	1,6	3,0	14	
38	6С17	6Р17Б	Двойной диод-триод	6,3	0,3	250	0,9	-	-	-9	1,9	16	8,5	-	2,5	0,3	3,6	2,4	2,8	14	
39	6С17	6Н10	Двойной триод	6,3	0,3	250	2,0 ^m	-	-	-2	1,4	70	50	-	2,5	-	2,2	2,0	3,0	16	
40	6С17	6К12Б	Пентод ВЧ Вариню	6,3	0,3	250	11,8	125	4,4	-7	4,7	4200	900	-	3	-	8,5	0,003	7,0	12	
41	6К1М	6К6	Двойной диод	6,3	0,3	125	4	-	-	-	-	-	-	-	-	-	0,2	-	-	19	
42	6А17	6А10	Пентодрид с самовозбужден.	6,3	0,3	250	2,4	100	7,1	-3,0	0,35	-	1000	-	1	-	7,5	0,005	11,0	15	
43	6Л7	6А3Б	Гелтод-смеситель	6,3	0,3	250	2,4	100	6,5	-3	0,38	-	700	800	-	1,75	-	7,5	0,001	11,0	22
44	Е-111	6Д1П	Генератор тока телевизон.	6,3	1,8	44	-	-	-	200 ^m	4,4	-	-	-	-	-	-	-	-	-	
45	6С20	6ЖВ	Пентод маломощный ВЧ	6,3	0,5	250	10	100	2,5	-2,4	7,5	1500	2000	-	2,5	-	9,5	0,03	6,25	8	
46	6К6	6П1	Оконечный пентод	6,3	0,4	250	3,3	250	5,5	-8	2,3	160	70	-	8,5	3,4	-	-	-	9	
47	6С6С	6П4	Оконечный пентод	6,3	0,3	180	1,5	180	2,5	-9	2,3	-	175	-	2,75	1,1	5,5	0,5	7,0	9	
48	6А4С	6С6	Оконечный триод	6,3	1,0	250	6,0	-	-	-4,5	5,3	4,2	0,8	2,5	1,5	3,5	7,5	1,6	5,5	2	
49	6П7	6С177	Триод-пентод	0,9	0,3	100	3,5	-	-	-3	0,45	8	18	-	-	-	2,5	2,0	3,0	7	
50	2С40		Пентод	2,50	0,65	100	1,5	-3	-	1,1	900	850	-	-	-	3,2	0,008	12,0	2		
51	2С40		Триод УКВ малочастотный	6,3	0,75	250	16,5	-	-	-	4,8	35	7,5	-	6,5	0,035	-	-	-	2	
52	2С43		Триод УКВ малочастотный	6,3	0,9	300	2,6	-	-	-	9,0	4,5	-	-	-	-	-	-	-	-	
53	12А6	12П6	Лучевой тетрод	12,6	0,15	250	3,0	250	3,5	-12,5	3	-	70	-	7,5	3,4	9	0,3	9	9	
54	12Н7-Г	12Н1	Двойной триод	12,6	0,15	180	7,6	-	-	-6,5	1,9	16	8,4	-	1,5	-	9	9	9	11	
55	12П200	12Ж1Л	Пентод универсальный	12,6	0,15	210	2,0	75	0,55	-2,3	1,5	2000	1400	-	2,0	-	3,4	3,4	3,6	3	
56	12С2	12С2	Триод	12,6	0,15	250	9,0	-	-	-8	2,6	20	7,1	-	2,5	-	3,4	3,4	3,6	3	
57	12С2	12Н10	Двойной триод	12,6	0,15	250	2,0	-	-	-2	1,3	70	5,3	-	2,5	-	3,4	3,4	3,6	3	
58	12С2	12К12Б	Пентод ВЧ Вариню	12,6	0,15	250	9,2	150	3,4	-2,5	4,0	-	1000	-	3,0	-	6,5	0,005	7,0	12	
59	12С2	12Ж17Б	Пентод ВЧ	12,6	0,15	250	9,2	100	0,8	-3	1,65	2500	1500	-	2,5	-	6,0	0,005	7,0	13	
60	12С2	12К17Б	Пентод ВЧ Вариню	12,6	0,15	250	9,2	100	0,8	-3	1,65	2500	1500	-	2,5	-	6,0	0,005	7,0	13	
61	12С2	12Р17Б	Двойной диод-триод	12,6	0,15	250	0,9	-	-	-2	1,1	100	81	-	4,0	-	6,0	0,003	7,0	13	
62	12С2	12Р15	Двойной диод-триод	12,6	0,15	250	0,9	-	-	-2	1,1	100	81	-	4,0	-	6,0	0,003	7,0	13	
63	12С2	12Р15	Двойной диод-триод	12,6	0,15	250	0,9	-	-	-9	1,9	1,6	8,5	-	2,5	0,3	3,6	2,4			

ТАБЛИЦА ПРИЕМНОУСИЛИТЕЛЬНЫХ РАДИОЛАМП

№ п/п	Обозначение		Тип лампы	Накал		Анод		Экр. сетка		Сме. цепи	Кру. уш. л.	Кос. напр.	Внут. сопр.	Пощ. вых. мощ.	Емкости	Проч. вых.	Примечания						
	старое	новое		U _г	I _г	U _а	I _а	U _с	I _с									E _г	S	M	R _г	R _а	R _с
1	954	6Ж1Ж	Пентод УВЧ (жидкий)	6,3	0,15	250	2	100	0,7	-	3	14	1700	1200	-	12	-	34	400	3	29		
2	955	6С1Ж	Триод УВЧ (жидкий)	6,3	0,15	180	4,3	-	-	-	-	5	20	25	12,3	20	1,5	0,15	1,0	1,4	0,6	30	
3	956	6К1Ж	Пентод УВЧ Варимю (жидкий)	6,3	0,15	250	6,7	100	2,7	-	3	5	1250	700	-	12	-	37	400	3	29		
4	9002	6С8Л	Триод миниатюрный	6,3	0,16	90	2,5	-	-	-	-	2,5	1,7	2,5	174	-	1,6	-	1,2	1,1	1,4	6	
5	9003	6К19Л	Пентод баритмо миниат.	6,3	0,15	250	6,7	100	2,7	-	3	1,8	1400	700	-	1,7	-	34	400	3	4		
6	9004	6Д1Ж	Диод УВЧ (жидкий)	6,3	0,15	117	5 мм	-	-	-	-	0,25	-	800	-	-	-	-	0,01	3	4	7	
7	141П	6Д1Ж	Диод-преобразователь	1,2	0,06	90	0,8	4,5	1,9	0	0,25	-	-	-	-	-	-	-	-	-	-	-	
8	151П	6Д1Ж	Диод-пентод низкой частоты	1,2	0,06	90	0,8	4,5	1,9	0	0,25	-	-	-	-	-	-	-	-	-	-	-	
9	1К1П	6Д1Ж	Пентод ВЧ Варимю	1,2	0,06	90	0,8	4,5	1,9	0	0,25	-	-	-	-	-	-	-	-	-	-	-	
10	2П1П	6Д1Ж	Оконечный пентод	1,2	0,12	90	3,5	90	2,1	-	4,5	0,75	-	800	-	-	-	-	-	-	-	-	31
11	6А8	6А8Б	Пентод-преобразователь	6,3	0,3	250	3	100	2,7	-	3	0,51	100	360	-	1	-	12,5	400	12,5	26	12	
12	6А8В	6К150	Пентод УКВ баритмо	6,3	0,45	300	12,5	200	3,2	-	3	5,0	3500	700	-	3	-	8,0	0,015	5,0	13	13	
13	6А8С	6К146	Пентод УКВ	6,3	0,45	300	10	150	2,5	-	2	9	9000	1000	-	3	-	11	0,005	5	13	13	
14	6А8С	6АЖ5	Пентод УКВ миниатюрный	6,3	0,3	250	7	150	2	-	8	5	4000	800	-	2	-	6,5	0,025	1,8	4	4	
15	6А8С	6Ж-45	Телевизионный видео-пентод	6,3	0,65	300	30	150	7	-	3	11	1430	130	-	9	30	13	0,06	7,5	12	12	
16	6В8	6В8Б	Двухнодный диод пентод	6,3	0,3	250	3,0	12,5	2,3	-	3	1,1	730	650	-	2,5	-	6	0,005	9	2,5	2,5	
17	6С3М	6С5	Триод	6,3	0,3	250	8,0	-	-	-	-	8	20	20	10	10	2,5	0,25	3	2,0	11	3	
18	6Г7	6Р7Б	Двухнодный диод-триод	6,3	0,3	250	1,1	-	-	-	-	3	12	70	58	-	2	-	1,5	4,5	24	24	
19	6Е5	6Е5	Электронный индикатор	6,3	0,3	250	0,1-5	-	-	-	-	8(0)	0,8	20	25	1000	-	-	-	-	-	-	2,5
20	6Л5	6С2Б	Триод	6,3	0,3	250	9	-	-	-	-	2	20	7,7	-	2,5	-	4,2	3,8	5	3	3	
21	6Л6	6Н1П	Двухнодный триод миниатюр	6,3	0,45	150	30	-	-	-	-	10	5,3	3,8	14	-	1,5	-	2,2	1,6	0,4	5	5
22	6Л7	6Ж7Б	Пентод ВЧ	6,3	0,3	250	2	100	0,5	-	3	1,2	1400	10	-	0,75	-	7	0,005	12	8	8	
23	6К7	6К7Б	Пентод ВЧ Варимю	6,3	0,3	250	7	100	1,7	-	3	1,45	1200	800	-	2,25	-	9,2	7	0,005	12	8	
24	6К8	6Д1	Триод-вексо	6,3	0,3	250	9	-	-	-	-	0	2	500	-	0,5	-	6	0,03	5	27	27	
25	6К9М	6К9	Пентод ВЧ Варимю	6,3	0,3	250	9	100	2,6	-	3	2,0	1600	800	-	3	-	6	0,005	11	8	8	
26	6Л7С	6Н7	Двухнодный триод класса В	6,3	0,8	300	3,5	-	-	-	-	0,1	3,2	3,5	25	8	11	10	2,8	2,4	5,4	21	21
27	6П3	6П3	Лучевой тетрод	6,3	0,9	250	7,8	250	7	-	-	14	61	130	21	2,5	-	20,5	6,5	10	4,0	8	8
28	6Р5	6С4Б	Триод	6,3	0,3	250	1	-	-	-	-	2	1,6	100	63	-	0,4	0,06	2,2	2,8	3,2	23	23
29	6Р6С	6П2	Оконечный пентод	6,3	0,7	250	34	250	7	-	-	16,5	2,5	200	80	7	10	3,2	8	0,5	6,5	9	9
30	6Р6	6П2	Лучевой тетрод	6,3	0,45	250	4,5	250	4,5	-	-	12,5	4,1	250	52	5	12	4,5	3,5	0,7	7,5	9	9
31	6Ж17	6А15Б	Пентод-преобразователь	6,3	0,3	250	3,5	200	8,5	0	0,45	-	1000	-	-	-	-	9,5	0,005	12	15	15	
32	6Ж17	6Ж17Б	Пентод ВЧ	6,3	0,3	250	30	100	0,8	-	3	1,65	2500	1500	-	2,5	-	6,0	0,005	7,0	12	12	
33	6Ж17	6Ж17Б	Пентод ВЧ	6,3	0,3	250	10,8	100	0,4	-	-	1,4	4,9	4400	900	-	3	-	8,5	0,003	7,0	12	12
34	6Ж17	6Н9	Двухнодный триод	6,3	0,3	250	2,3	-	-	-	-	2,2	1,6	70	44	-	1	-	3,2	2,8	4,5	10	10
35	6Ж17	6Н9	Двухнодный триод	6,3	0,6	250	9	-	-	-	-	8	2,6	20	7,7	-	2,5	-	3,4	4	10	10	
36	6Ж17	6Р17Б	Пентод ВЧ Варимю	6,3	0,3	250	9,2	100	2,4	-	3	2,0	1600	800	-	4	-	6	0,003	7	13	13	
37	6Ж17	6Р17Б	Двухнодный диод триод	6,3	0,3	250	0,9	-	-	-	-	-	2,1	100	90	-	2,5	-	3,2	1,6	3,0	14	14
38	6Ж17	6Р17Б	Двухнодный диод триод	6,3	0,3	250	9,5	-	-	-	-	1,9	16	8,5	-	2,5	0,3	3,6	2,4	2,8	14	14	
39	6Ж17	6Н10	Двухнодный триод	6,3	0,3	250	2,0	-	-	-	-	2	1,4	70	50	-	-	-	2,2	2,0	3,0	16	16
40	6Ж17	6К12Б	Пентод ВЧ Варимю	6,3	0,3	250	11,8	12,5	4,4	-	-	4,7	4200	900	-	3	-	8,5	0,003	7,0	12	12	
41	6Ж17	6Х6	Двухнодный диод	6,3	0,3	125	4	-	-	-	-	0,1	1,6	100	63	-	-	-	0,02	-	-	19	19
42	6Ж17	6А10	Пентод с самовозбуждением	6,3	0,3	250	2,4	100	7,1	-	3,0	0,35	-	1000	-	1	-	7,5	0,005	11,0	15	15	
43	6Ж17	6А15Б	Пентод-смеситель	6,3	0,3	250	2,4	100	6,5	-	3	0,38	-	700	300	-	1,75	-	7,5	0,001	11,0	22	22
44	6Ж17	6Д1П	Генератор тока телевизора	6,3	1,8	44	-	-	-	-	-	2,00	+44	-	-	-	-	-	-	-	-	-	22
45	6Ж17	6ЖВ	Пентод малобаритный УВЧ	6,3	0,5	250	10	100	2,5	-	2,4	7,5	15000	2000	-	2,5	-	3,3	0,03	6,25	8	8	
46	6К6	6П1	Оконечный пентод	6,3	0,4	250	3,3	250	5,5	-	8	2,3	160	70	-	8,5	3,4	-	-	-	-	9	9
47	6С6С	6П4	Оконечный пентод	6,3	0,3	180	1,5	180	2,5	-	9	2,3	-	175	-	8,75	1,1	5,5	0,5	7,0	9	9	
48	6С6С	6С6	Оконечный триод	6,3	0,3	180	1,5	180	2,5	-	9	2,3	-	175	-	8,75	1,1	5,5	0,5	7,0	9	9	
49	6Ф7	6С177	Триод-пентод	6,3	0,3	100	3,5	-	-	-	-	4,5	5,3	4,2	0,8	2,5	-	1,5	3,5	1,6	5,5	2	2
50	2С40	6С177	Триод-пентод	6,3	0,3	100	3,5	-	-	-	-	3	0,45	8	18	-	-	-	2,6	2,0	3,0	7	7
51	2С43	6С177	Триод-пентод	6,3	0,3	100	3,5	-	-	-	-	3	1,1	900	850	-	-	-	3,2	0,003	12,0	12,0	12,0
52	2С43	6С177	Триод-пентод	6,3	0,3	100	3,5	-	-	-	-	3	1,1	900	850	-	-	-	3,2	0,003	12,0	12,0	12,0
53	12А6	12П6	Лучевой тетрод	12,6	0,9	300	2,6	-	-	-	-	3,0	4,5	5	-	6,5	0,035	-	-	-	-	2	2
54	12А6	12Н1	Двухнодный триод	12,6	0,15	250	3,0	250	3,5	-	-	12,5	3	-	-	-	-	7,5	3,4	9	0,3	9	9
55	12А6	12Н1	Двухнодный триод	12,6	0,15	180	7,6	-	-	-	-	6,5	1,9	16	8,4	-	-	-	1,5	3	3	8	8
56	12С5	12С2	Пентод универсальный	12,6	0,075	210	2,0	7,5	0,55	-	2,3	1,5	2000	1400	-	2,0	-	8,0	-	9	3	8	11
57	12С5	12Н10	Триод	12,6	0,15	250	9,0	-	-	-	-	8	2,6	20	7,7	-	-	-	-	-	-	16	16
58	12С5	12К12Б	Пентод ВЧ Варимю	12,6	0,15	250	2,0	-	-	-	-	2	1,3	70	53	-	-	-	2,5	-	3,4	3,6	3
59	12С7	12К12Б	Пентод ВЧ Варимю	12,6																			

ТАБЛИЦА ПРИЕМНОУСИЛИТЕЛЬНЫХ РАДИОЛАМП

№ п/п	Обозначение		Тип лампы	Накал		Анод		Экр. сетка		Сме-Кру		Коз	Внут. сопр.	Сопр. напр.	Мощн. вых.	Вых. мощн.	Емкости			Примечания	
	старое	новое		U _г	I _г	U _а	I _а	U _с	I _с	-E _г	S						μ	R _г	R _а		R _с
1	954	6Ж1Ж	Пентод УВЧ (желез)	6,3	0,15	250	2	100	0,7	-3	1,4	1700	200	-	12	-	3,4	4007	3	2,9	
2	955	6С1Ж	Триод УВЧ (желез)	6,3	0,15	180	4,3	-	-	-5	2,0	2,5	12,3	20	1,5	0,13	7,0	4,4	1,6	3,0	
3	958	6К1Ж	Пентод УВЧ Варимю (желез)	6,3	0,15	250	6,7	100	2,7	-3	1,8	1250	700	-	1,2	-	3,4	4007	3	2,9	
4	9002	6С8Л	Триод миниатюрный	6,3	0,15	90	2,5	-	-	-2,5	1,7	2,5	174	-	1,6	-	1,2	1,1	1,4	6	
5	9003	6К19П	Пентод Барнито миниат.	6,3	0,15	250	6,7	100	2,7	-3	1,8	1400	700	-	1,7	-	3,4	4007	3	4	
6	9004	6Д1Ж	Диод УВЧ (желез)	6,3	0,15	117	5,3	-	-	-	-	-	-	-	-	-	-	-	-	-	
7		1А1П	Гелтод-преобразователь	1,2	0,06	90	0,8	45	1,9	0	0,25	-	800	-	-	-	-	-	-	-	
8		1Б1П	Диод-пентод низкой частоты	1,2	0,06	90	0,8	45	1,9	0	0,25	-	800	-	-	-	-	-	-	-	
9		1К1П	Пентод Вч Варимю	1,2	0,06	90	0,8	45	1,9	0	0,25	-	800	-	-	-	-	-	-	-	
10		2П1П	Оконечный пентод	1,2	0,12	90	1,5	90	2,1	-4,5	2,15	270	100	10	-	0,27	-	-	-	-	
11	6A8	6A8B	Гелтод-преобразователь	6,3	0,3	250	3	100	2,7	-3	0,31	100	360	-	1	-	12,5	4006	12,5	2,6	
12	6A87	6K150	Пентод УКВ Варимю	6,3	0,45	300	12,5	200	3,2	-3	0,30	3500	700	-	3	-	8,0	0,015	5,0	2,3	
13	6A87	6K146	Пентод УКВ	6,3	0,45	300	10	150	2,5	-2	9	9000	1000	-	3	-	7,1	0,008	5	1,3	
14	6A85	6AЖ5	Пентод УКВ миниатюрный	6,3	0,3	250	7	150	2	-8	5	4000	800	-	2	-	6,5	0,025	1,8	4	
15	6A67	6Ж45	Телевизионный видео-пентод	6,3	0,65	300	30	150	7	-3	1,1	1430	130	-	9	3,0	13	0,06	7,5	12	
16	6A6	6B8B	Двойной диод пентод	6,3	0,3	250	9,0	125	2,3	-3	1,1	730	650	-	2,5	-	6	0,005	9	2,6	
17	6C5M	6C5	Триод	6,3	0,3	250	8,0	-	-	-8	2,0	20	10	10	2,5	0,25	3	2,0	1,1	2,5	
18	6Г7	6P7B	Двойной диод-триод	6,3	0,3	250	1,1	-	-	-3	1,2	70	58	-	2	-	1,5	4,5	-	-	
19	6E5	6E5	Электронный индикатор	6,3	0,3	250	0,1-5	-	-	-8(0)	0,8	20	25	1000	-	-	-	-	-	-	
20	6Г8	6C2B	Триод	6,3	0,3	250	9	-	-	-8	2,6	20	7,7	-	2,5	-	4,2	3,8	5	3	
21	6Г6	6M1P	Двойной триод миниатюр	6,3	0,45	150	3,0	-	-	-10	5,3	38	7,1	-	1,5	-	2,2	1,6	0,4	5	
22	6Г7	6Ж7B	Пентод Вч	6,3	0,3	250	2	100	0,5	-3	1,2	1400	12	-	0,75	-	7	0,005	12	8	
23	6Г7	6Ж7B	Пентод Вч Варимю	6,3	0,3	250	7	100	1,7	-3	1,2	1200	800	-	2,25	0,2	7	0,005	12	8	
24	6K8	6A1	Триод-вакуум	6,3	0,3	250	2,5	100	6,0	-3	0,3	-	500	-	0,5	-	6	0,03	5	2,7	
25	6K9M	6K9	Пентод Вч Варимю	6,3	0,3	250	9	100	2,6	-3	0,3	1600	800	-	1,1	-	4,8	0,005	11	8	
26	6H7C	6H7	Двойной триод класса В	6,3	0,8	300	3,5	-	-	0	3,2	35	23	8	1,1	-	10	4,3	2,4	5,4	
27	6П3	6П3	Лучевой тетрод	6,3	0,9	250	1,8	250	7	-14	6,1	130	21	2,5	20,5	6,5	10	4,7	8	9	
28	6П5	6C4B	Триод	6,3	0,3	250	1	-	-	-2	1,6	100	63	-	0,4	0,06	2,2	2,8	3,2	2,3	
29	6A6C	6П2	Оконечный пентод	6,3	0,3	250	3,4	250	7	-16,5	2,5	200	80	7	10	3,2	8	0,5	6,5	9	
30	6A6	6П2	Лучевой тетрод	6,3	0,45	250	4,5	250	4,5	-12,5	4,1	250	52	5	12	4,5	19,5	0,7	7,5	9	
31	6A7	6A1B5	Гелтод-преобразователь	6,3	0,3	250	3,5	100	8,5	0	0,45	-	1000	-	1	-	9,5	0,01	12	15	
32	6A17	6Ж17B	Пентод Вч	6,3	0,3	250	3,0	100	0,8	-3	1,65	2500	1500	-	2,5	-	6,0	0,005	7,0	13	
33	6A17	6Ж116	Пентод Вч	6,3	0,3	250	10,8	150	4,1	-1	4,9	4400	900	-	3	-	8,5	0,003	7,0	12	
34	6A17	6H8	Двойной триод	6,3	0,3	250	2,3	-	-	-2	1,6	70	7,7	-	1	-	3,2	2,8	3,5	10	
35	6A17	6H8	Двойной триод	6,3	0,3	250	9	-	-	-8	2,6	20	7,7	-	2,5	-	3,2	2,8	3,5	10	
36	6A17	6K17B	Пентод Вч Варимю	6,3	0,3	250	3,2	100	2,4	-3	2,0	1600	800	-	4	-	6	0,003	7	13	
37	6A17	6P17B	Двойной диод триод	6,3	0,3	250	0,9	-	-	-2	1,1	100	90	-	2,5	-	3,2	1,6	3,0	14	
38	6A17	6P17B	Двойной диод триод	6,3	0,3	250	9,5	-	-	-9	1,9	16	8,5	-	2,5	0,3	3,6	2,4	2,8	14	
39	6A17	6H10	Двойной триод	6,3	0,3	250	2,0	-	-	-2	1,4	70	50	-	2,2	-	2,0	3,0	16	16	
40	6A17	6K12B	Пентод Вч Варимю	6,3	0,3	250	11,8	125	4,1	-1	4,7	4200	900	-	3	-	8,5	0,003	7,0	12	
41	6A17	6X6	Двойной диод	6,3	0,3	125	4	-	-	-	-	-	-	-	-	-	-	-	-	-	
42	6A17C	6A10	Пентодрид с самовозбужден	6,3	0,3	250	2,4	100	7,1	-3,0	0,35	-	1000	-	1	-	-	0,02	-	19	
43	6A17	6A55	Гелтод-смеситель	6,3	0,3	250	2,4	100	6,5	-3	0,38	-	700	800	-	1,75	-	7,5	0,005	11,0	15
44	6A17	6D1П	Генератор тока телевизора	6,3	1,8	44	-	-	-	-	-	-	-	-	-	-	-	7,5	0,001	11,0	22
45	6A20	6ЖВ	Пентод малобаритный УВЧ	6,3	0,2	250	10	100	2,5	-2,4	7,5	15000	2000	-	2,5	-	9,5	0,03	6,25	8	
46	6A6	6П1	Оконечный пентод	6,3	0,4	250	3,3	250	5,5	-8	2,3	160	70	-	8,5	3,4	-	-	-	9	
47	6C6C	6П4	Оконечный пентод	6,3	0,3	180	15	180	2,5	-9	2,3	-	173	-	8,75	1,1	5,8	9,5	7,0	9	
48	6A4C	6C6	Оконечный триод	6,3	1,0	250	60	-	-	-4,5	5,3	42	0,8	2,5	1,5	3,5	7,5	1,6	5,5	2	
49	6F7	6C177	Триод-пентод	6,3	0,3	100	3,5	-	-	-3	0,45	8	1,8	-	-	-	2,5	2,0	3,0	7	
50	2C40		Триод УКВ маячковый	6,3	0,75	250	16,5	-	-	-	4,8	35	7,5	-	6,5	0,035	3,2	0,001	12,0	2	
51	2C43		Триод УКВ маячковый	6,3	0,9	300	2,6	-	-	-	9,0	4,5	5	-	-	-	-	-	-	-	
52	12A6	12П6	Лучевой тетрод	12,6	0,15	250	3,0	250	3,5	-12,5	3	-	70	-	7,5	3,4	9	0,3	9	9	
53	12A7-GT	12H1	Двойной триод	12,6	0,15	180	7,6	-	-	-6,5	1,9	16	8,4	-	1,5	-	9	9	9	11	
54	12A7-100	12H17	Пентод универсальный	12,6	0,15	250	9,0	-	-	-8	2,6	20	7,7	-	8,5	-	3,4	3,4	3,6	3	
55	12A7-5T	12H20	Триод	12,6	0,15	250	9,0	-	-	-8	2,6	20	7,7	-	8,5	-	3,4	3,4	3,6	3	
56	12A7-5T	12H20	Двойной триод	12,6	0,15	250	2,0	-	-	-2	1,3	70	5,3	-	8,5	-	2,2	2,0	5,0	16	
57	12A5G7	12K12B	Пентод Вч Варимю	12,6	0,15	250	9,2	150	3,4	-2,5	4,0	-	3000	-	3,0	-	8,5	0,003	7,0	12	
58	12A7-7	12K17B	Пентод Вч	12,6	0,15	250	9,2	100	0,8	-3	1,65	2500	1500	-	2,5	-	6,0	0,005	7,0	13	
59	12A7-7	12P17B	Пентод Вч Варимю	12,6	0,15	250	9,2	100	2,6	-3	2,0	1600	800	-	4,0	-	6,0	0,003	7,0	13	
60	12A7-7	12P17B	Двойной диод-триод	12,6	0,15	250	0,9	-	-	-2	1,1	100	91	-	2,5	-	3,2	1,6	3,0	14	
61	12A7-7	12P17B	Двойной диод-триод	12,6	0,15	250	9,5	-	-	-9	1,9	16	8,5	-	2,5	-	3,2	1,6	3,0	14	
62	12A7-7	12P17B	Триод генераторный ДЦВ	12,6	0,1	300	-	-	-	-	3	11	-	-	2,6	0,3	3,6	2,4	2,8	14	
63	12A7-7	12P17B	Триод генераторный ДЦВ	12,6	0,8	800	-	-	-	-	3	11	-	-	2,6	0,3	3,6	2,4	2,8		

ТАБЛИЦА ПРИЕМНОУСИЛИТЕЛЬНЫХ РАДИОЛАМП

№ п/п	Обозначение		Тип лампы	Накал		Анод		Экр. сетка		Смещение	Кру. усил.	Кос. усил.	Внут. сопр.	Сопр. напр.	Мощн. росс. изм.	Вых. мощ.	Емкости			Примечания		
	старое	новое		Ц ₁	Ц ₂	Ц ₃	Ц ₄	Ц ₅	Ц ₆								Ц ₇	Ц ₈	Ц ₉		Ц ₁₀	Ц ₁₁
1	954	6Ж1Ж	Пентод УВЧ (жильев)	6,3	0,15	250	2	100	0,7	-3	1,4	1700	1200	-	12	-	3,4	400	3	29		
2	955	6С1Ж	Триод УВЧ (жильев)	6,3	0,15	150	4,3	-	-	-5	2,0	2,5	12,3	20	1,5	0,75	1,0	1,4	0,6	30		
3	958	6К1Ж	Пентод УВЧ Варимю (жильев)	6,3	0,15	250	6,7	100	2,7	-3	1,8	1200	700	-	12	-	3,7	400	3	28		
4	9002	6С6Л1	Триод миниатюрный	6,3	0,15	90	2,5	-	-	-2,5	1,7	2,5	17,4	-	1,6	-	1,2	1,1	1,4	6		
5	9003	6К19Л	Пентод Варимю миниатюр.	6,3	0,15	250	6,7	100	2,7	-3	1,8	1400	700	-	1,7	-	3,4	400	3	4		
6	9004	6Д1Ж	Диаод УВЧ (жильев)	6,3	0,15	117	5,5	-	-	-	-	-	-	-	-	-	-	-	-	1		
7		1А1П	Пентод-преобразователь	1,2	0,05	90	0,8	45	1,9	0	0,25	-	800	-	-	-	-	-	-	1,3		
8		1Б1П	Диаод-пентод низкой частоты	1,2	0,06	90	0,8	45	1,9	0	0,25	-	800	-	-	-	-	-	-	-		
9		1К1П	Пентод ВЧ Варимю	1,2	0,06	90	1,8	45	0,65	0	0,75	-	800	-	-	-	-	-	-	-		
10		2П1П	Оконечный пентод	1,2	0,12	90	3,5	90	2,1	-4,5	2,15	270	100	10	-	0,27	-	-	-	-	31	
11	6А8	6А8Б	Пентод-преобразователь	6,3	0,3	230	3	100	2,7	-3	0,51	100	360	-	1	-	12,5	400	12,5	26		
12	6А87	6К155	Пентод УКВ Варимю	6,3	0,45	300	12,5	200	3,2	-3	5,0	3500	700	-	3	-	8,0	600	5,0	13		
13	6А87	6К146	Пентод УКВ	6,3	0,45	300	10	150	2,5	-2	9	9000	1000	-	3	-	11	600	5	13		
14	6А85	6АЖ5	Пентод УКВ миниатюрный	6,3	0,3	250	7	150	2	-8	5	4000	800	-	2	-	6,5	0,025	1,8	4		
15	6А87	6Ж45	Телевизионный видео-пентод	6,3	0,65	300	30	150	7	-3	11	1430	130	-	9	3,0	13	0,06	7,5	12		
16	6В8	6В8Б	Двойной диод пентод	6,3	0,3	250	3,0	125	2,3	-3	1,1	730	650	-	2,5	-	6	0,005	1,9	3		
17	6С3М	6С5	Триод	6,3	0,3	250	8,0	-	-	-8	2,0	2,0	10	10	2,5	0,25	5	2,0	11	3		
18	6Г7	6Р7Б	Двойной диод-триод	6,3	0,3	250	1,1	-	-	-3	1,2	7,0	58	-	2	-	5	1,5	4,5	24		
19	6Е5	6Е5	Электронный индикатор	6,3	0,3	250	0,1-5	-	-	-8(0)	0,8	2,0	2,5	1000	-	-	-	-	-	2,8		
20	6Л5	6С2Б	Триод	6,3	0,3	250	9	-	-	-8	2,8	2,0	7,7	-	2,5	-	4,2	3,8	5	3		
21	6Л6	6Н1П	Двойной триод миниатюр.	6,3	0,45	150	3,0	-	-	-10	5,3	3,8	7,4	-	1,5	-	2,2	1,6	0,4	5		
22	6Л7	6Ж7Б	Пентод ВЧ	6,3	0,3	250	2	100	0,5	-3	1,2	1400	12	-	0,75	-	7	5,0	12	8		
23	6Л7	6К7Б	Пентод ВЧ Варимю	6,3	0,3	250	7	100	1,7	-3	1,45	1200	800	-	2,25	0,2	7	4,0	1,2	8		
24	6К8	6Д1	Триод-сексоид	6,3	0,3	210	2,5	100	6,0	-3	0,3	-	300	-	0,5	-	6	0,03	5	27		
25	6К9М	6К9	Пентод ВЧ Варимю	6,3	0,3	250	9	100	2,6	-3	2,0	1600	800	-	0,5	-	4,8	0,005	11	8		
26	6Н7С	6Н7	Двойной триод класса В	6,3	0,8	300	3,5	100	2,6	-3	0,1	3,2	35	8	-	11	10	4,3	2,4	5,4	2	
27	6П3	6П3	Лучевой тетрод	6,3	0,9	230	7,8	250	7	-14	6,1	130	21	2,5	20,5	6,5	10	6,7	8	9		
28	6Р5	6С4Б	Триод	6,3	0,3	250	1	-	-	-2	1,6	100	63	-	0,4	0,06	2,2	2,8	3,2	23		
29	6Р8С	6П2	Оконечный пентод	6,3	0,45	250	34	250	7	-16,5	2,5	200	80	7	10	3,2	8	0,5	6,5	9		
30	6В6	6П2	Лучевой тетрод	6,3	0,45	250	4,5	250	4,5	-12,5	4,1	250	52	1,5	12	4,5	9,5	0,7	7,5	9		
31	6А17	6А15Б	Пентод-преобразователь	6,3	0,3	250	3,5	100	8,5	0	0,45	-	1000	-	1	-	9,5	5,0	12	15		
32	6С17	6Ж7Б	Пентод ВЧ	6,3	0,3	250	3,0	100	0,8	-3	1,65	2300	1500	-	2,5	-	6,0	0,005	7,0	13		
33	6С17	6Ж11Б	Пентод ВЧ	6,3	0,3	250	3,0	100	0,8	-3	1,65	2300	1500	-	2,5	-	6,0	0,005	7,0	13		
34	6С17	6Н9	Двойной триод	6,3	0,3	250	10,8	150	4,1	-1	4,9	4400	900	-	3	-	8,5	0,003	7,0	12		
35	6С17	6Н8	Двойной триод	6,3	0,3	250	23	-	-	-2	1,6	70	44	-	1	-	3,2	3,8	3,5	10		
36	6С17	6К7Б	Пентод ВЧ Варимю	6,3	0,6	250	9	-	-	8	2,6	20	7,7	-	2,5	-	3,9	2,0	1,0	10		
37	6С17	6Р7Б	Двойной диод триод	6,3	0,3	250	9,2	100	2,4	-3	2,0	1600	800	-	4	-	6	0,003	7	13		
38	6С17	6Р7Б	Двойной диод триод	6,3	0,3	250	0,9	-	-	-2	1,1	100	9,0	-	2,5	-	3,2	1,6	3,0	14		
39	6С17	6Н10	Двойной триод	6,3	0,3	250	9,5	-	-	-9	1,9	16	8,5	-	2,5	0,3	3,6	2,4	2,8	14		
40	6С17	6К12Б	Пентод ВЧ Варимю	6,3	0,3	250	11,8	12,5	4,4	-2	1,4	70	50	-	2,2	-	2,2	2,0	3,0	16		
41	6К6М	6Х6	Двойной диод	6,3	0,3	125	4,9	-	-	-1	4,7	4200	900	-	3	-	8,5	0,003	7,0	12		
42	6А17	6А10	Пентод с самовозбужден.	6,3	0,3	250	2,4	100	7,1	-3,0	0,35	-	1000	-	1	-	0,02	-	-	19		
43	6Л7	6А5Б	Пентод-смеситель	6,3	0,3	250	2,4	100	6,5	-3	0,38	-	700	800	-	1,75	-	7,5	0,005	11,0	15	
44	6С17	6ДП17	Генератор тока телевизии	6,3	1,8	44	-	200	-	-	44	-	-	-	-	5	-	0,001	1,0	22		
45	6С20	6ЖВ	Пентод малобаритный УВЧ	6,3	0,5	250	10	100	2,5	-2,4	7,5	15000	2000	-	2,5	-	9,5	0,03	6,25	8		
46	6Р6	6П1	Оконечный пентод	6,3	0,4	250	3,5	250	5,5	-8	2,3	160	70	-	8,5	3,4	-	-	-	9		
47	6С6-6	6П4	Оконечный пентод	6,3	0,3	180	1,5	180	2,5	-9	2,3	-	17,5	-	8,75	1,1	5,5	0,5	7,0	9		
48	6А4-6	6С6	Оконечный триод	6,3	1,0	250	6,0	-	-	-4,5	3,3	4,2	0,8	2,5	1,5	3,5	7,5	1,6	5,5	2		
49	6Ф7	6С177	Триод-пентод	6,3	0,3	100	3,5	-	-	-3	0,45	8	1,8	-	-	-	2,5	2,0	3,0	7		
50			Пентод	6,3	0,3	250	6,5	100	1,5	-3	1,1	900	650	-	-	-	3,2	0,008	12,0	10		
51	2С40		Триод УКВ маячковый	6,3	0,75	250	16,5	-	-	-4,8	3,5	7,5	-	-	6,5	0,035	-	-	-	2		
52	2С43		Триод УКВ маячковый	6,3	0,9	300	2,6	-	-	-9,0	4,5	5	-	-	-	-	-	-	-	-		
53	12А6	12П6	Лучевой тетрод	12,6	0,15	250	3,0	250	3,5	-12,5	3	-	70	-	7,5	3,4	9	0,3	9	9		
54	12А7-6	12Н1	Двойной триод	12,6	0,15	180	7,6	-	-	-6,5	1,9	1,6	8,4	-	1,5	-	9	3	8	11		
55	12А7-6	12Ж1Л	Пентод универсальный	12,6	0,15	180	7,6	-	-	-6,5	1,9	1,6	8,4	-	1,5	-	9	3	8	11		
56	12С6-6	12С2	Триод	12,6	0,15	250	9,0	-	-	-8	2,6	2,0	7,7	-	2,5	-	3,4	3,4	3,6	3		
57	12С67	12К10	Двойной триод	12,6	0,15	250	9,2	-	-	-8	2,6	2,0	7,7	-	2,5	-	3,4	3,4	3,6	3		
58	12С67	12К12Б	Пентод ВЧ Варимю	12,6	0,15	250	9,2	150	3,4	-2,5	4,0	-	>1000	-	3,0	-	6,5	0,005	7,0	12		
59	12С77	12Ж17Б	Пентод ВЧ	12,6	0,15	250	9,2	100	2,8	-3	1,65	2300	1500	-	2,5	-	6,0	0,005	7,0	13		
60	12С77	12К17Б	Пентод ВЧ Варимю	12,6	0,15	250	9,2	100	2,6	-3	2,0	1600	800	-	4,0	-	6,0	0,003	7,0	13		
61	12С77	12Р17Б	Двойной диод-триод	12,6	0,15	250	9,5	-	-	-2	1,1	100	91	-	-	-	3,2	1,6	3,0	14		

ТАБЛИЦА ПРИЕМНОУСИЛИТЕЛЬНЫХ РАДИОЛАМП

№ п/п	Обозначение		Тип лампы	Накал		Анод		Экр сетка		Сте-м	Кру-чен	Коз-ушек	Внут-р	Сопр-с	Мощ-н	Вых-м	Емкости			Примечания		
	старое	новое		нап-т	ток	нап-т	ток	U _к	J _к								U _к	J _к	U _к		J _к	U _к
1	954	6ЖТЖ	Пентод УВЧ (жолуь)	6,3	0,15	250	2	100	0,7	-3	1,4	1700	1200	-	12	-	3,4	400	3	29		
2	955	6С1Ж	Триод УВЧ (жолуь)	6,3	0,15	180	4,3	-	-	-5	2,0	25	12,3	20	1,5	0,75	2,0	4,4	4,6	3,0		
3	958	6К1Ж	Пентод УВЧ Варимю (жолуь)	6,3	0,15	250	6,7	100	2,7	-3	1,8	7250	700	-	1,2	-	3,4	400	1	28		
4	9002	6С8П	Триод миниатюрный	6,3	0,18	90	2,5	-	-	-2,5	1,7	2,5	17,4	-	1,6	-	1,2	1,1	1,4	6		
5	9003	6К19П	Пентод Варимю миниат.	6,3	0,15	250	6,7	100	2,7	-3	1,8	1400	700	-	1,7	-	3,4	400	3	4		
6	9004	6Д1Ж	Диод УВЧ (жолуь)	6,3	0,15	117	0,8	-	-	-	-	-	-	-	-	-	-	-	-	-		
7		1А1П	Генлок-преобразователь	12	0,06	90	0,8	45	1,9	0	0,25	-	-	-	-	-	-	-	-	-		
8		1Б1П	Диод-пентод низкой частоты	12	0,06	90	0,8	-	-	-	-	-	800	-	-	-	-	-	-	-		
9		1К1П	Пентод В4 Варимю	12	0,06	90	1,8	45	0,65	0	0,75	50	1000	-	-	-	-	-	-	-		
10		2П1П	Оконечный пентод	12	0,12	90	3,5	90	2,1	-4,5	2,5	270	100	10	-	0,27	-	-	-	-	31	
11	6А8	6А8Б	Генлок-преобразователь	6,3	0,3	250	3	100	2,7	-3	0,51	100	360	-	1	-	12,5	400	12,5	26		
12	6АВ7	6К15Б	Пентод УКВ Варимю	6,3	0,45	300	12,5	200	3,2	-3	5,0	3500	700	-	3	-	8,0	0,015	5,0	13		
13	6АС7	6Ж14Б	Пентод УКВ	6,3	0,45	300	10	150	2,5	-2	9	9000	1000	-	3	-	7,1	0,008	5	13		
14	6АС5	6АЖ5	Пентод УКВ миниатюрный	6,3	0,3	250	7	150	2	-8	5	4000	800	-	2	-	4,5	0,025	1,8	4		
15	6АС7	6Ж15	Телевизионный видео-пентод	6,3	0,65	300	30	150	7	-3	11	1430	130	-	9	3,0	13	0,06	2,5	12		
16	6Б6	6Б8Б	Двойной диод пентод	6,3	0,3	250	3,0	125	2,3	-3	1,1	730	650	-	2,5	-	6	0,005	9	26		
17	6С3М	6С5	Триод	6,3	0,3	250	8,0	-	-	-8	2,0	20	10	10	2,5	0,25	3	2,0	11	3		
18	6Г7	6Р7Б	Двойной диод-триод	6,3	0,3	250	1,1	-	-	-3	1,2	70	58	-	2	-	3	1,5	4,5	24		
19	6Е3	6Е5	Электронный индикатор	6,3	0,3	250	0,1-5	-	-	-8(0)	0,8	2,0	25	1000	-	-	-	-	-	-	23	
20	6Л8	6С2Б	Триод	6,3	0,3	250	9	-	-	-8	2,6	20	7,7	-	2,5	-	4,2	3,8	5	3		
21	6Л6	6М1П	Двойной триод миниатюр	6,3	0,45	150	3,0	-	-	-10	5,3	3,8	7,1	-	1,5	-	2,2	1,6	10,4	5		
22	6Л7	6Ж7Б	Пентод В4	6,3	0,3	250	2	100	0,5	-3	1,2	1400	12	-	0,75	-	7	5,0	12	8		
23	6К7	6К7Б	Пентод В4 Варимю	6,3	0,3	250	7	100	1,7	-3	1,45	1200	800	-	2,25	9,2	7	6,0	12	8		
24	6К8	6Д1	Триод-вектор	6,3	0,3	250	2,5	100	2,6	-3	0,3	-	500	-	0,5	-	6	0,03	5	27		
25	6К9	6К9	Пентод В4 Варимю	6,3	0,3	250	9	100	2,6	-3	2,0	1600	800	-	0,5	-	4,8	0,005	11	8		
26	6Н7С	6Н7	Двойной триод класса В	6,3	0,8	300	35	0	0	3,2	3,5	23	8	-	11	10	4,3	2,4	5,4	21		
27	6П3	6П3	Лучевой тетрод	6,3	0,9	250	7,8	250	7	-14	6,1	130	21	2,5	20,5	6,5	10	4,0	8	9		
28	6Р6	6С4Б	Триод	6,3	0,3	250	1	-	-	-	1,6	130	63	-	0,4	0,06	2,2	2,8	3,2	23		
29	6Р8С	6П2	Оконечный пентод	6,3	0,7	250	3,4	250	7	-2	1,6	200	80	7	10	3,2	8	0,5	6,5	9		
30	6V6	6П2	Лучевой тетрод	6,3	0,45	250	4,5	250	4,5	-12,5	4,1	250	52	5	12	4,5	9,5	0,7	7,5	9		
31	6A7	6A15Б	Генлок-преобразователь	6,3	0,3	250	3,5	100	8,5	0	0,45	-	1000	-	1	-	9,5	4,0	12	15		
32	6E7	6Ж7Б	Пентод В4	6,3	0,3	250	3,0	100	0,8	-3	1,65	2300	1500	-	2,5	-	6,0	0,005	7,0	13		
33	6E7	6Ж11Б	Пентод В4	6,3	0,3	250	10,8	150	4,1	-1	4,9	4400	900	-	3	-	8,5	0,003	7,0	12		
34	6L7	6H9	Двойной триод	6,3	0,3	250	2,3	-	-	-2	1,6	70	4,4	-	1	-	3,2	3,8	3,5	10		
35	6M7	6H8	Двойной триод	6,3	0,6	250	9	-	-	8	2,6	20	7,7	-	2,5	-	4,0	4,0	10,0	10		
36	6K7	6K17Б	Пентод В4 Варимю	6,3	0,3	250	9,2	100	2,4	-3	2,0	1600	800	-	4	-	6	0,003	7	13		
37	6S07	6P7Б	Двойной диод триод	6,3	0,3	250	0,9	-	-	-2	1,1	100	90	-	2,5	-	3,2	1,6	3,0	14		
38	6S7	6P7Б	Двойной диод триод	6,3	0,3	250	9,5	-	-	-9	1,9	16	8,5	-	2,5	0,3	3,6	2,4	2,8	14		
39	6C7	6H10	Двойной триод	6,3	0,3	250	2,0	-	-	-2	1,4	70	5,0	-	2,5	-	2,2	2,0	3,0	16		
40	6E7	6K12Б	Пентод В4 Варимю	6,3	0,3	250	11,8	12,5	4,4	-1	4,7	4200	900	-	3	-	8,5	0,003	7,0	12		
41	6X6M	6X6	Двойной диод	6,3	0,3	125	4	-	-	-	-	-	-	-	-	-	0,02	-	-	19		
42	6A7C1	6A10	Пентод с самовозбужден	6,3	0,3	250	2,4	100	7,1	-3,0	0,35	-	1000	-	1	-	7,5	0,005	11,0	15		
43	6L7	6A5B	Генлок-преобразователь	6,3	0,3	250	2,4	100	6,5	-3	0,38	700	800	-	1,75	-	7,5	0,001	11,0	22		
44	6E3-III	6Z1П1	Генлок-преобразователь	6,3	1,8	44	-	200	11	+4	-	-	-	-	5	-	9,0	0,001	11,0	28		
45	6E2D	6ЖВ	Пентод маломощный УВЧ	6,3	0,5	250	10	100	2,5	-2,4	7,5	15000	2000	-	2,5	-	9,5	0,03	6,25	8		
46	6K6	6П1	Оконечный пентод	6,3	0,3	180	15	180	2,5	-9	2,3	160	70	-	8,5	3,4	8,5	3,4	9,5	8		
47	6C6C	6П4	Оконечный пентод	6,3	0,3	180	15	180	2,5	-9	2,3	160	70	-	8,5	3,4	8,5	3,4	9,5	8		
48	6A4C	6C6	Оконечный триод	6,3	1,0	250	6,0	-	-	-4,5	5,3	4,2	0,8	2,5	1,5	3,5	7,5	1,6	5,5	2		
49	6F7	6C177	Триод-пентод	6,3	0,3	100	3,5	-	-	-3	0,45	8	18	-	-	-	2,5	2,0	3,0	7		
50	2C40		Пентод-250	6,3	0,3	100	3,5	-	-	-3	0,45	8	18	-	-	-	2,5	2,0	3,0	7		
51	2C40		Триод УКВ маячковый	6,3	0,75	250	16,5	100	1,5	-3	1,1	900	650	-	6,5	0,035	3,2	0,003	12,0	2		
52	2A6	12П6	Триод УКВ маячковый	6,3	0,9	300	2,6	-	-	-	4,8	35	7,5	-	-	-	-	-	-	-		
53	12A7-CT	12Н1	Двойной триод	12,6	0,15	250	3,0	250	3,5	-12,5	3	-	70	-	7,5	3,4	9	0,3	9	9		
54	12A7-CT	12Ж11	Пентод универсальный	12,6	0,15	180	7,6	-	-	-6,5	1,9	16	8,4	-	1,5	-	3	3	8	11		
55	12C7-CT	12C2	Триод	12,6	0,15	210	2,0	75	0,55	-2,3	1,5	2000	1100	-	2,0	-	2,0	-	-	18		
56	12C7	12H10	Двойной триод	12,6	0,15	250	9,0	-	-	-8	2,6	20	7,7	-	2,5	-	3,4	3,4	3,6	3		
57	12C7	12K12B	Пентод В4 Варимю	12,6	0,15	250	9,0	-	-	-2	1,3	70	5,3	-	2,5	-	2,2	2,0	3,0	16		
58	12S77	12Ж17B	Пентод В4	12,6	0,15	250	3,2	150	3,4	-2,5	1,0	-	1000	-	3,0	-	0,5	0,003	7,0	12		
59	12S77	12K17B	Пентод В4 Варимю	12,6	0,15	250	3,0	100	0,8	-3	1,65	2500	1500	-	2,5	-	6,0	0,005	7,0	13		
60	12S77	12P17B	Двойной диод-триод	12,6	0,15	250	9,2	100	2,6	-3	2,0	1600	800	-	4,0	-	6,0	0,003	7,0	13		
61	12S77	12P17B	Двойной диод-триод	12,6	0,15	250	9,5	-	-	-2	1,1	100	9,1	-	-	-	3,2	1,6	3,0	14		
62																						

ТАБЛИЦА ПРИЕМНОУСИЛИТЕЛЬНЫХ РАДИОЛАМП

№ п/п	Обозначение		Тип лампы	Накал		Анод		Экр. сетка		Смещение	Крутизна	Код	Внутр. сопр.	Сопр. напр.	Мощность	Вых. мощ.	Емкости			Примечания	
	старое	новое		Ц ₁	J ₁	Ц ₂	J ₂	Ц ₃	J ₃								U ₁	U ₂	U ₃		U ₄
1	954	6ЖКЖ	Пентод УВЧ (жгульц)	6,3	0,15	250	2	100	0,7	-3	14	1700	1200	-	12	-	3,4	4,0	3	29	
2	955	6С1Ж	Триод УВЧ (жгульц)	6,3	0,15	180	4,3	-	-	-5	2,0	23	12,3	20	1,5	0,15	1,0	1,4	0,6	30	
3	958	6К1Ж	Пентод УВЧ Варимю (жгульц)	6,3	0,15	250	6,7	100	2,7	-3	5	7250	700	-	12	-	3,7	4,0	3	29	
4	9002	6С8П	Триод миниатюрный	6,3	0,15	90	2,5	-	-	-2,5	1,7	2,5	174	-	1,6	-	1,2	1,7	1,4	6	
5	9003	6К19П	Пентод Варимю миниат	6,3	0,15	250	6,7	100	2,7	-3	1,8	1400	700	-	1,7	-	3,4	0,01	3	4	
6	9004	6Д1Ж	Диод УВЧ (жгульц)	6,3	0,15	117	5,5	-	-	-	-	-	-	-	-	-	-	-	-	1	
7	1А1П	Пентод-преобразователь		1,2	0,06	90	0,8	45	1,9	0	0,25	-	800	-	-	-	-	-	-	1	
8	1Б1П	Диод-пентод низкой частоты		1,2	0,06	90	-	3мА	0	0	-	50м	-	1000	-	-	-	-	-	1	
9	1К1П	Пентод ВЧ Варимю		1,2	0,06	90	1,8	45	0,65	0	0,75	-	800	-	-	-	-	-	31	Используется в радиоприемниках	
10	2П1П	Оконечный пентод		1,2	0,12	90	3,5	90	2,1	-4,5	216	270	100	10	0,27	-	-	-	-	31	Используется в радиоприемниках
11	6А8	6А8Б	Пентод-преобразователь	6,3	0,3	250	3	100	2,7	-3	0,51	100	360	-	1	-	12,5	4,0	12,5	26	
12	6А9	6К150	Пентод УКВ Варимю	6,3	0,45	300	12,5	200	3,2	-3	5,0	3500	700	-	3	-	11	11	5,0	13	
13	6А9	6К146	Пентод УКВ	6,3	0,45	300	10	150	2,5	-2	9	9000	1000	-	3	-	11	11	5,0	13	
14	6А9	6АЖ5	Пентод УКВ миниатюрный	6,3	0,3	250	7	150	2	-8	5	4000	800	-	2	-	6,5	0,025	1,8	4	
15	6А9	6АЖ5	Телевизионный видео-пентод	6,3	0,65	300	30	150	7	-3	11	1430	130	-	9	3,0	13	0,06	7,5	12	
16	6В8	6В8Б	Двойной диод пентод	6,3	0,3	250	8,0	125	2,3	-3	1,1	730	650	-	2,5	-	6	0,005	3	2,6	
17	6С3М	6С5	Триод	6,3	0,3	250	8,0	-	-	-8	2,0	2,0	10	10	2,5	0,25	3	2,0	11	3	
18	6С7	6Р7Б	Двойной диод-триод	6,3	0,3	250	1,1	-	-	-3	1,2	70	58	-	2	-	3	1,5	4,5	2,4	
19	6С5	6С5	Электронный индикатор	6,3	0,3	250	0,1-5	-	-	-8(0)	0,8	2,0	25	1000	-	-	-	-	-	2,9	
20	6С5	6С2Б	Триод	6,3	0,3	250	9	-	-	-8	2,6	2,0	7,7	-	2,5	-	4,2	3,8	5	3	
21	6С5	6Н1П	Двойной триод миниатюр	6,3	0,45	150	30	-	-	-10	5,3	3,8	7,1	-	4,5	-	2,2	1,6	0,4	5	
22	6С7	6Ж7Б	Пентод ВЧ	6,3	0,3	250	2	100	0,5	-3	1,2	1400	12	-	0,75	-	7	2,0	12	8	
23	6С7	6К7Б	Пентод ВЧ Варимю	6,3	0,3	250	7	100	1,7	-3	1,5	1200	800	-	2,25	0,2	7	6,0	12	8	
24	6К8	6Д1	Триод-сексог	6,3	0,3	250	2,5	100	2,0	-3	0,3	-	500	-	0,5	-	6	0,03	5	27	
25	6К9М	6К9	Пентод ВЧ Варимю	6,3	0,3	250	9	100	2,6	-3	2,0	1600	800	-	0,5	-	1,8	0,03	11	8	
26	6Н7С	6Н7	Двойной триод класса В	6,3	0,8	300	3,5	-	-	0	3,2	35	23	8	11	10	4,1	2,4	5,4	21	
27	6П3	6П3	Лучевой тетрод	6,3	0,9	250	7,8	250	7	-14	6,1	130	21	2,5	20,5	6,5	7,0	4,0	8	9	
28	6Р8	6С4Б	Триод	6,3	0,3	250	1	-	-	-2	1,6	100	63	-	0,4	0,06	2,2	2,8	3,2	23	
29	6Р8	6П2	Лучевой тетрод	6,3	0,7	250	3,4	250	7	-16,5	2,5	200	80	7	10	3,2	8	0,5	6,5	9	
30	6А7	6А1ББ	Пентод-преобразователь	6,3	0,45	250	4,5	250	4,5	-12,5	4,1	250	52	5	12	4,5	3,5	0,7	7,3	9	
31	6С17	6Ж17Б	Пентод ВЧ	6,3	0,3	250	3,5	100	8,5	0	0,45	-	1000	-	1	-	9,5	4,0	12	15	
32	6С17	6Ж17Б	Пентод ВЧ	6,3	0,3	250	3,0	100	0,8	-3	1,65	2500	1500	-	2,5	-	6,0	0,04	7,0	13	
33	6С17	6Ж17Б	Двойной триод	6,3	0,3	250	10,8	150	4,1	-1	4,9	4400	900	-	3	-	8,5	0,03	7,0	12	
34	6С17	6Н8	Двойной триод	6,3	0,3	250	23	-	-	-2	1,6	70	44	-	1	-	3,2	3,8	4,5	10	
35	6С17	6Н8	Двойной триод	6,3	0,6	250	8	-	-	8	2,6	20	7,7	-	2,5	-	3,4	4,4	1,0	10	
36	6С17	6К17Б	Пентод ВЧ Варимю	6,3	0,3	250	9,2	100	2,4	-3	2,0	1600	800	-	4	-	6	0,04	7	13	
37	6С17	6Р17Б	Двойной диод триод	6,3	0,3	250	0,9	-	-	-2	1,1	100	90	-	2,5	-	3,2	1,6	3,0	14	
38	6С17	6Р17Б	Двойной диод триод	6,3	0,3	250	9,5	-	-	-9	1,9	16	8,5	-	2,5	0,3	3,6	2,4	2,8	14	
39	6С17	6Н10	Двойной триод	6,3	0,3	250	20	-	-	-2	1,4	10	50	-	2,5	-	2,2	2,0	3,0	12	
40	6Р9	6К12Б	Пентод ВЧ Варимю	6,3	0,3	250	11,8	12,5	4,4	-1	4,7	4200	500	-	3	-	8,5	0,03	7,0	12	
41	6К6М	6К6	Двойной диод	6,3	0,3	125	4	-	-	-1	4,7	4200	500	-	3	-	8,5	0,03	7,0	12	
42	6С17	6А10	Пентод с самовозбуждением	6,3	0,3	250	24	100	7,1	3,0	0,35	-	1000	-	1	-	7,5	0,04	11,0	15	
43	6П7	6А5Б	Пентод-смеситель	6,3	0,3	250	24	100	6,5	3	0,38	700	800	-	1,75	-	7,5	0,04	11,0	22	
44	6С-111	6ДП1	Генератор тока телевизион	6,3	1,8	44	-	-	-	200	+4,4	-	-	-	5	-	-	-	-	2,8	
45	2Б20	6ЖВ	Пентод маломощный УВЧ	6,3	0,5	250	10	100	2,5	-2,4	7,5	15000	2000	-	2,5	-	9,5	0,03	6,25	8	
46	6К6	6П1	Оконечный пентод	6,3	0,4	250	33	250	5,5	-8	2,3	160	70	-	8,5	3,4	-	-	-	9	
47	6С6-6	6П4	Оконечный пентод	6,3	0,3	180	15	180	2,5	-9	8,3	-	175	-	8,75	1,1	5,5	9,5	7,0	9	
48	6В4-6	6С6	Оконечный триод	6,3	1,0	250	60	-	-	-4,5	5,3	4,2	0,8	2,5	1,5	3,5	7,5	1,6	5,5	2	
49	6Ф1	6С177	Триод-пентод	6,3	0,3	100	3,5	-	-	-3	0,45	8	18	-	-	-	2,5	2,0	3,0	7	
50	2С40	12С2	Триод УКВ маячковый	6,3	0,75	250	16,5	-	-	-4,8	3,5	7,5	-	-	6,5	0,035	3,2	0,04	12,0	12	
51	2С43	12С2	Триод УКВ маячковый	6,3	0,9	300	2,6	-	-	-9,0	4,5	5	-	-	-	-	-	-	-	12	
52	12А6	12П6	Лучевой тетрод	12,6	0,15	250	30	250	3,5	-12,5	3	-	70	-	7,5	3,4	9	0,3	9	9	
53	12А7-6Т	12К11	Двойной триод	12,6	0,15	180	7,6	-	-	-4,5	1,9	16	8,4	-	1,5	-	3	3	8	11	
54	12А7-6Т	12К11	Пентод универсальный	12,6	0,15	180	7,6	-	-	-4,5	1,9	16	8,4	-	1,5	-	3	3	8	11	
55	12А7-6Т	12К11	Триод	12,6	0,15	250	9,0	-	-	-8	2,6	20	7,7	-	2,0	-	3,4	3,4	3,6	3	
56	12С67	12Н40	Двойной триод	12,6	0,15	250	2,0	-	-	-2	1,3	70	5,3	-	2,5	-	3,2	2,0	3,0	16	
57	12С67	12К12Б	Пентод ВЧ Варимю	12,6	0,15	250	9,2	150	3,4	-2,5	4,0	-	1000	-	3,0	-	6,5	0,03	7,0	12	
58	12С67	12К17Б	Пентод ВЧ	12,6	0,15	250	9,2	100	0,8	-3	1,65	2500	1500	-	2,5	-	6,0	0,03	7,0	13	
59	12С67	12К17Б	Пентод ВЧ Варимю	12,6	0,15	250	9,2	100	2,6	-3	2,0	1600	800	-	4,0	-	6,0	0,03	7,0	13	
60	12С67	12Р17Б	Двойной диод-триод	12,6	0,15	250	0,9	-	-	-2	1,1	100	91	-	2,5	-	3,2	1,6	3,0	14	
61	12С67	12Р17Б	Двойной диод-триод	12,6	0,15	250	9,5	-	-	-9	1,9	16	8,5	-	2,5	0,3	3,6	2,4	2,8	14	
62	12С67																				

ТАБЛИЦА ПРИЕМНОУСИЛИТЕЛЬНЫХ РАДИОЛАМП

№ п/п	Обозначение		Тип лампы	Накал		Анод		Экр сетки		Смещение	Крутизна	Кол-во	Внутр. сопр.	Сопр. напр.	Мощность	Вых. мощ.	Емкости			Примечания
	старое	новое		U _г	I _г	U _а	I _а	U _с	I _с								-E _г	S	м	
1	954	6Ж1Ж	Пентод УВ4 (жолуб)	6,3	0,15	250	2	100	0,7	-3	1,4	1700	200	-	12	-	3,4	5,0	5	2,9
2	955	6С1Ж	Триод УВ4 (жолуб)	6,3	0,15	180	4,3	-	-	-5	2,0	231	72,5	20	1,5	0,75	1,0	1,4	4,6	3,0
3	956	6К1Ж	Пентод УВ4 Варимю (жолуб)	6,3	0,15	250	6,7	100	2,7	-3	5	7250	700	-	12	-	3,4	5,0	5	2,9
4	9002	6С8П	Триод миниатюрный	6,3	0,15	90	2,5	-	-	-2,5	1,7	2,5	174	-	1,6	-	3,4	5,0	5	2,9
3	9003	6К19П	Пентод Бюрою миниат	6,3	0,15	250	6,7	100	2,7	-3	1,8	1400	700	-	1,7	-	3,4	5,0	5	2,9
6	9004	6Д1Ж	Диод УВ4 (жолуб)	6,3	0,15	117	3,5	-	-	-	-	-	-	-	-	-	-	-	-	-
7		1А1П	Генлок-преобразователь	12	0,05	90	0,8	45	1,9	0	0,25	-	800	-	-	-	-	-	-	-
8		1Б1П	Диод-пентод низкой частоты	12	0,05	90	0,8	45	1,9	0	0,25	-	800	-	-	-	-	-	-	-
9		1К1П	Пентод В4 Варимю	12	0,05	90	0,8	45	1,9	0	0,25	-	800	-	-	-	-	-	-	-
10		2П1П	Оконечный пентод	12	0,05	90	0,8	45	1,9	0	0,25	-	800	-	-	-	-	-	-	-
11	6А8	6А8Б	Генлок-преобразователь	6,3	0,3	230	3	100	2,7	-3	0,51	100	360	1	-	12,5	4,0	12,5	2,6	
12	6А8В	6К15Б	Пентод УКВ Варимю	6,3	0,45	300	12,5	200	3,2	-3	5,0	3500	700	3	-	8,0	0,015	5,0	1,3	
13	6А8Г	6К15В	Пентод УКВ	6,3	0,45	300	10	150	2,5	-2	9	9000	1000	3	-	7,1	1,0	5,0	1,3	
14	6А8Д	6АЖ5	Пентод УКВ миниатюрный	6,3	0,3	230	7	150	2,7	-3	5	4000	800	2	-	6,5	0,025	2,0	4	
15	6А8Е	6Ж15	Телезионный видео-пентод	6,3	0,65	300	30	150	7	-3	11	1430	130	9	3,0	1,5	0,06	7,5	1,2	
16	6А8Б	6Б8Б	Двухнодный диод пентод	6,3	0,3	250	3,0	125	2,3	-3	1,1	730	650	2,5	-	6	0,005	9	2,6	
17	6Б5М	6Б5	Триод	6,3	0,3	250	8,0	-	-	-8	2,0	20	10	10	2,5	0,25	3	2,0	1,1	3
18	6Г1	6Г1Б	Двойной диод-триод	6,3	0,3	250	1,1	-	-	-3	1,2	70	58	10	2,5	0,25	3	2,0	1,1	3
19	6Г5	6Е5	Электронный индикатор	6,3	0,3	250	0,1-5	-	-	-8(0)	0,8	20	25	1000	2	-	1,5	4,5	2,4	2
20	6Г5	6С2Б	Триод	6,3	0,3	250	9	-	-	-8	2,6	20	7,7	-	-	-	-	-	-	2,5
21	6Г5	6М1П	Двойной триод миниатюр	6,3	0,45	150	30	-	-	-10	5,3	38	7,1	-	2,5	-	4,2	3,8	5	3
22	6Г7	6Ж7Б	Пентод В4	6,3	0,3	250	2	100	0,5	-3	1,2	1400	12	-	1,5	-	2,2	1,6	10,4	5
23	6Г7	6К7Б	Пентод В4 Варимю	6,3	0,3	250	7	100	1,7	-3	1,45	1200	800	-	0,75	-	7	5,0	12	8
24	6К8	6Д1	Триод-вектор	6,3	0,3	250	2,5	100	0,6	-3	0,3	-	500	-	2,25	0,2	7	6,0	12	8
25	6К9М	6К9	Пентод В4 Варимю	6,3	0,3	250	9	100	2,6	-3	2,0	1600	800	0,5	-	6	0,03	5	2,7	
26	6Н7С	6Н1	Двойной триод класса В	6,3	0,8	300	35	-	-	0,1	3,2	35	21	8	-	4,8	0,025	1,1	8	
27	6П5	6П3	Лучевой тетрод	6,3	0,9	250	7,8	250	7	-14	6,1	130	21	8	11	10	2,4	1,4	1,4	21
28	6П5	6С4Б	Триод	6,3	0,3	250	1	-	-	-2	1,6	100	63	-	20,5	6,5	7,0	6,0	8	9
29	6Ф8С	6П6	Оконечный пентод	6,3	0,7	250	34	250	7	-16,5	2,5	200	80	10	3,2	8	0,5	1,5	9	9
30	6Ф8	6П2	Лучевой тетрод	6,3	0,45	250	45	250	4,5	-12,5	4,1	250	52	5	12	4,5	0,7	1,5	9	9
31	6Ж17	6Ж17Б	Генлок-преобразователь	6,3	0,3	250	35	100	8,5	0	0,45	-	1000	-	-	-	-	-	-	-
32	6Ж17	6Ж17В	Пентод В4	6,3	0,3	250	30	100	0,8	-3	1,65	2500	1500	-	2,5	-	3,5	5,0	12	15
33	6Ж17	6Ж17Б	Пентод В4	6,3	0,3	250	30	100	0,8	-3	1,65	2500	1500	-	2,5	-	3,5	5,0	12	15
34	6Ж17	6Н9	Двойной триод	6,3	0,3	250	10,8	150	4,1	-1	4,9	4400	900	-	1	-	6,0	0,007	7,0	13
35	6Ж17	6Н8	Двойной триод	6,3	0,3	250	23	-	-	-2	1,6	70	44	3	-	6,5	0,003	7,0	12	10
36	6Ж17	6К7Б	Пентод В4 Варимю	6,3	0,6	250	9	-	-	-8	2,6	20	7,7	-	2,5	-	3,2	3,8	5	3
37	6Ж17	6Р17Б	Двойной диод триод	6,3	0,3	250	9,2	100	2,4	-3	2,0	1600	800	-	2,5	-	3,4	4,0	7,0	10
38	6Ж17	6Р17В	Двойной диод триод	6,3	0,3	250	0,9	-	-	-2	1,1	100	90	-	4	-	6	0,003	7	13
39	6Ж17	6Н10	Двойной триод	6,3	0,3	250	9,5	-	-	-9	1,9	16	8,5	-	2,5	0,3	3,2	1,6	3,0	14
40	6Ж17	6К12Б	Пентод В4 Варимю	6,3	0,3	250	20	-	-	-2	1,9	16	8,5	-	2,5	0,3	3,6	2,4	2,8	14
41	6Ж18	6Ж6	Двойной диод	6,3	0,3	250	11,8	12,5	4,4	-1	4,7	4200	900	-	3	-	2,2	2,0	3,0	16
42	6Ж18	6А10	Пентод с самовозбуждением	6,3	0,3	125	4,8	-	-	-	-	-	-	-	-	-	8,5	0,003	7,0	12
43	6П7	6А25Б	Генлок-преобразователь	6,3	0,3	250	24	100	7,1	3,0	0,35	-	1000	-	1	-	0,02	-	-	-
44	6С11	6Д17	Генлок-преобразователь	6,3	0,3	250	24	100	6,5	-3	0,38	-	700	800	-	1,5	-	0,005	11,0	15
45	6С11	6Д17	Генлок-преобразователь	6,3	0,3	250	24	100	6,5	-3	0,38	-	700	800	-	1,5	-	0,005	11,0	15
46	6С11	6Ж17	Пентод миниатюрный УВ4	6,3	0,5	250	10	100	2,5	-2,4	7,5	15000	2000	-	2,5	-	3,5	0,03	6,25	8
47	6С6-Г	6П4	Оконечный пентод	6,3	0,3	180	15	180	2,5	-9	2,3	-	175	-	2,5	-	3,5	0,03	6,25	8
48	6С6-Г	6С6	Оконечный триод	6,3	1,0	250	60	-	-	-4,5	3,3	42	0,8	2,5	7,5	3,5	7,5	1,6	5,5	2
49	6С7	6С17	Триод-пентод	6,3	0,3	100	3,5	-	-	-3	0,45	8	18	-	-	-	2,6	2,0	3,0	7
51	2С40		Триод УКВ маячковый	12,6	0,25	250	16,5	-	-	-	4,8	35	7,5	-	6,5	0,035	3,2	0,008	12,0	2
52	2С43		Триод УКВ маячковый	12,6	0,25	250	16,5	-	-	-	4,8	35	7,5	-	6,5	0,035	3,2	0,008	12,0	2
53	12А6	12П6	Лучевой тетрод	12,6	0,9	300	2,6	-	-	-	9,0	4,5	5	-	-	-	-	-	-	-
54	12А7-ГТ	12Н1	Двойной триод	12,6	0,15	250	30	250	3,5	-12,5	3	-	7,0	-	7,5	3,4	2	0,3	9	9
55	12А7-ГТ	12Ж11	Пентод универсальный	12,6	0,15	180	7,6	-	-	-6,5	1,9	16	8,4	-	1,5	-	3	3	8	11
56	12А7-ГТ	12С2	Триод	12,6	0,075	210	2,0	75	0,55	-2,3	1,5	2000	1400	-	2,0	-	8,0	-	-	10
57	12С2	12Н10	Двойной триод	12,6	0,15	250	9,0	-	-	-8	2,6	20	7,7	-	2,5	-	3,4	3,4	3,6	3
58	12С2	12К12Б	Пентод В4 Варимю	12,6	0,15	250	9,2	-	-	-8	2,6	20	7,7	-	2,5	-	3,4	3,4	3,6	3
59	12С2	12К17Б	Пентод В4 Варимю	12,6	0,15	250	9,2	150	3,4	-2,5	4,0	-	1000	-	3,0	-	8,2	2,0	3,0	16
60	12С2	12К17В	Пентод В4 Варимю	12,6	0,15	250	3,0	100	2,8	-3	1,65	2500	1500	-	2,5	-	6,0	0,003	7,0	12
61	12С2	12Р17Б	Двойной диод-триод	12,6	0,15	250	9,2	100	2,6	-3	2,0	1600	800	-	4,0	-	6,0	0,003	7,0	13
62	12С2	12Р17В	Двойной диод-триод	12,6	0,15	250	9,9	-	-	-2	1,1	100	91	-	4,0	-	3,2	1,6	3,0	14
63	12С2	12Р17В	Двойной диод-триод	12,6	0,15	250	9,9	-	-	-2	1,1	100	91	-	4,0	-	3,2	1,6	3,0	14
64	12С2	12Р17В	Триод генераторный ДЦВ	12,6	0,1	300	-	-	-	-9	1,9	1,6	8,5	-	2,5	0,3	3,6	2,4	2,8	14
65	12С2	12Р17В	Двойной пентод генераторный	12,6	0,1	300	-	-	-	-9	1,9	1,6	8,5	-	2,5	0,3	3,6	2,4	2,8	14
66	12С2	12Р17В	Двойной пентод генераторный	12,6	0,1	300	-	-	-	-9	1,9	1,6	8,5	-	2,5	0,3	3,6	2,4	2,8	14
67	12С2	12Р17В	Двойной пентод генераторный	12,6	0,1	300	-	-	-	-9	1,9	1,6	8,5	-	2,5	0,3	3,6	2,4	2,8	14
68	12С2	12Р17В	Пентод генераторный	12,6	0,1	300	-	-	-	-9	1,9	1,6	8,5	-	2,5	0,3	3,6	2,4	2,8	14
69	12С2	12Р17В	Тетрод лучевой	12,6	0,9	600	10-20	300	5-10	-30	6	-	-	-	20	20	9,5	0,3	1,5	15
70	12С2	12Р17В	Пентод лучевой	12,6	0,9	600	10-20	300	5-10	-30	6	-	-	-	20	20	9,5	0,3	1,5	15

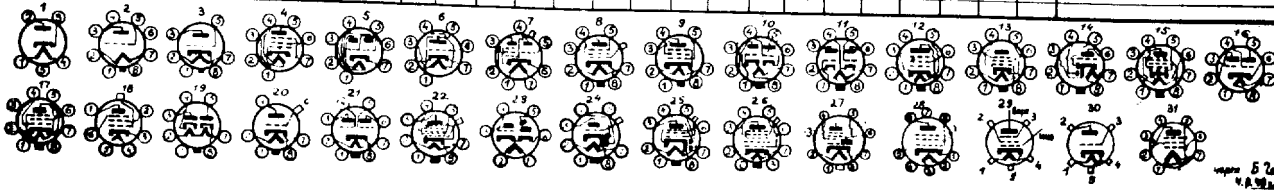


ТАБЛИЦА ПРИЕМНОУСИЛИТЕЛЬНЫХ РАДИОЛАМП

№ п/п	Обозначение		Тип лампы	Накал		Анод		Экр. сетка		Смес.	Кру.	Коз.	Внут.	Сопр.	Мощн.	Вых.	Емкости			Примечания	
	старое	новое		напс ток	напс ток	напс ток	напс ток	Ц _к	Ц _р								Е _к	С	М		R _к
U	A	V	mA	V	mA	V	mA	V	mA	Ω	Ω	Ω	Ω	Ω	Ω	Ω	Ω	Ω	Ω	Ω	Ω
1	954	6ЖТЖ	Пентод УВ4 (жолды)	6,3	0,15	250	2	100	0,7	-3	1,4	1700	1200	-	12	-	3,4	4007	3	29	
2	955	6С1Ж	Триод УВ4 (жолды)	6,3	0,15	180	4,3	-	-	-5	2,6	23	12,3	20	1,5	0,73	1,0	4,4	4,6	3,0	
3	958	6К1Ж	Пентод УВ4 Варимю (жолды)	6,3	0,15	250	6,7	100	2,7	-3	1,8	7200	700	-	12	-	3,4	4007	3	29	
4	9002	6СВЛ	Триод миниатюрный	6,3	0,18	90	2,5	-	-	-2,5	1,7	2,5	174	-	1,6	-	1,2	1,1	1,4	6	
5	9003	6К19П	Пентод Варимю миниат	6,3	0,15	250	6,7	100	2,7	-3	1,8	1400	700	-	1,7	-	3,4	4007	3	29	
6	9004	6ДЖ	Диод УВ4 (жолды)	6,3	0,15	117	5,4	-	-	-	-	-	-	-	-	-	1,3	1,3	4		
7		1А1П	Генлок-преобразователь	12	0,06	90	0,8	45	1,9	0	0,25	-	800	-	-	-	-	-	-	7	
8		1Б1П	Диод-пентод низкой частоты	12	0,06	90	0,8	45	1,9	0	0	50	1000	-	-	-	-	-	-	7	
9		1К1П	Пентод В4 Варимю	12	0,06	90	1,8	45	0,65	0	0,75	-	800	-	-	-	-	-	-	7	
10		2Л1П	Оконечный пентод	12	0,12	90	3,5	90	2,1	-4,5	2,15	270	100	10	-	0,27	-	-	-	31	
11	6А8	6А8Б	Генлок-преобразователь	6,3	0,3	250	3	100	2,7	-3	0,51	100	360	-	1	-	1,5	4004	12,5	26	
12	6А87	6К150	Пентод УКВ Варимю	6,3	0,45	300	12,5	200	3,2	-3	5,0	3500	700	-	3	-	8,0	0,015	5,0	13	
13	6А87	6К146	Пентод УКВ	6,3	0,45	300	10	150	2,5	-2	9	9000	1000	-	3	-	11	0,005	5	13	
14	6А85	6АЖ5	Пентод УКВ миниатюрный	6,3	0,3	250	7	150	2	-8	5	4000	800	-	2	-	6,5	0,025	1,8	4	
15	6А87	6Ж15	Телевизионный видео-пентод	6,3	0,65	300	30	150	7	-3	11	1430	130	-	9	9,0	13	0,06	7,5	12	
16	6В8	6В8Б	Двухнодный диод пентод	6,3	0,3	250	3,0	125	2,3	-3	1,1	730	650	-	2,5	-	6	0,005	9	26	
17	6С3М	6С5	Триод	6,3	0,3	250	8,0	-	-	-8	2,0	20	10	10	2,5	0,25	3	2,0	11	3	
18	6Г7	6Р7Б	Двухнодный диод-триод	6,3	0,3	250	1,1	-	-	-3	1,2	70	58	-	2	-	5	1,5	4,5	24	
19	6Е5	6Е5	Электронный индикатор	6,3	0,3	250	0,1-5	-	-	-8(0)	0,8	20	25	1000	-	-	-	-	-	23	
20	6Е5	6С2Б	Триод	6,3	0,3	250	9	-	-	-8	2,6	20	77	-	2,5	-	4,2	3,8	5	3	
21	6Г6	6Н1П	Двухнодный триод миниатюр	6,3	0,45	150	30	-	-	-10	5,3	38	71	-	1,5	-	8,2	1,6	0,6	5	
22	6Г7	6Ж7Б	Пентод В4	6,3	0,3	250	2	100	0,5	-3	1,2	1400	12	-	0,75	-	7	2,05	12	8	
23	6К7	6К7Б	Пентод В4 Варимю	6,3	0,3	250	7	100	1,7	-3	1,45	1200	800	-	2,25	0,2	7	4,05	12	8	
24	6К8	6Д1	Триод-вакуум	6,3	0,3	250	2,5	100	6,0	-3	0,3	-	500	-	0,9	-	6	0,03	5	27	
25	6К9М	6К9	Пентод В4 Варимю	6,3	0,3	250	9	100	2,6	-3	2,0	1600	800	-	3	-	4,5	0,005	11	8	
26	6Н7С	6Н7	Двухнодный триод класса В	6,3	0,8	300	3,5	-	-	0,9	3,2	35	23	8	11	10	4,5	2,4	3,1	21	
27	6П3	6П3	Лучевой тетрод	6,3	0,9	250	7,8	250	7	-14	6,1	130	21	2,5	20,5	6,5	10	4,0	8	9	
28	6Р8	6С4Б	Триод	6,3	0,3	250	1	-	-	2	1,6	100	63	-	0,4	0,06	2,2	2,8	3,2	23	
29	6Р8С	6П2	Оконечный пентод	6,3	0,7	250	3,4	250	7	-16,5	2,5	200	80	7	10	3,2	8	0,5	0,5	9	
30	6В6	6П2	Лучевой тетрод	6,3	0,45	250	4,5	250	4,5	-12,5	4,1	250	52	5	12	4,5	9,5	0,7	7,5	9	
31	6А7	6А18Б	Генлок-преобразователь	6,3	0,3	250	3,5	100	8,5	0	0,45	-	1000	-	1	-	9,5	0,05	12	15	
32	6С17	6Ж7Б	Пентод В4	6,3	0,3	250	30	100	0,8	3	1,65	2500	1500	-	2,5	-	6,0	0,005	7,0	13	
33	6С17	6К11Б	Пентод В4	6,3	0,3	250	30	100	0,8	1	4,9	4400	900	-	3	-	8,0	0,005	7,0	13	
34	6С17	6Н9	Двухнодный триод	6,3	0,3	250	10,8	150	4,1	-1	1,6	70	44	1	1	-	3,2	2,8	3,5	10	
35	6С17	6Н8	Двухнодный триод	6,3	0,3	250	9,8	-	-	-8	2,6	20	77	1	2,5	-	5,0	4	1,0	10	
36	6С17	6К7Б	Пентод В4 Варимю	6,3	0,3	250	9,2	100	2,4	-3	2,0	1600	800	-	4	-	6	0,003	7	13	
37	6С17	6Р7Б	Двухнодный диод триод	6,3	0,3	250	0,9	-	-	-2	1,1	100	90	-	2,5	-	3,2	1,6	3,0	14	
38	6С17	6Р1Б	Двухнодный диод триод	6,3	0,3	250	0,5	-	-	-9	1,9	16	8,5	-	2,5	0,3	3,6	2,4	2,8	14	
39	6С17	6Н10	Двухнодный триод	6,3	0,3	250	20	-	-	-2	1,4	70	50	-	2,2	2,0	3,0	3,0	16		
40	6С67	6К12Б	Пентод В4 Варимю	6,3	0,3	250	11,8	12,5	4,4	-1	4,7	4800	900	-	3	-	8,5	0,003	10	12	
41	6С6М	6Х6	Двухнодный диод	6,3	0,3	125	4	-	-	-	-	-	-	-	-	-	0,2	-	-	19	
42	6С17	6А10	Пентод с самовозбуждением	6,3	0,3	250	2,4	100	7,1	-3,0	0,35	-	1000	-	1	-	7,5	0,005	14,0	15	
43	6Л7	6А5Б	Генлок-смеситель	6,3	0,3	250	2,4	100	6,5	-3	0,38	700	800	-	1,75	-	7,5	0,001	13,0	22	
44	Е-111	6Д1П	Генератор тока телевизон	6,3	1,8	44	-	200	1,44	-	-	-	-	-	5	-	-	-	-	28	
45	7520	6ЖВ	Пентод малогабаритный УВ4	6,3	0,5	250	10	100	2,5	-24	7,5	1500	2000	-	2,5	-	9,5	0,03	6,25	8	
46	6К6	6П1	Оконечный пентод	6,3	0,4	250	3,3	250	5,5	-2	2,3	160	70	-	8,5	3,4	-	-	-	9	
47	6С6С	6П4	Оконечный пентод	6,3	0,3	180	15	180	2,5	-9	2,3	-	175	-	2,5	1,1	5,5	0,5	7,0	9	
48	6Б4С	6С6	Оконечный триод	6,3	1,0	250	60	-	-	-4,5	5,3	42	0,8	2,5	1,5	3,5	7,5	1,6	5,5	2	
49	6Б7	6С177	Триод-пентод	6,3	0,3	100	3,5	-	-	-3	0,45	8	18	-	2,5	-	2,0	3,0	7		
50			Пентод	2,50	0,65	100	1,5	-	-	4,8	3,5	7,5	-	6,5	0,035	3,2	0,003	12,0	2		
51	2С40		Триод УКВ маячковый	6,3	0,75	250	16,5	-	-	-	3,0	4,5	5	-	-	-	-	-	-	2	
52	2С43		Триод УКВ маячковый	6,3	0,9	300	2,6	-	-	-	3,0	4,5	5	-	-	-	-	-	-	2	
53	12А6	12П6	Лучевой тетрод	12,6	0,21	250	30	250	3,5	-12,5	3	-	70	-	7,5	3,4	9	0,3	2	9	
54	12А7-67	12Н1	Двухнодный триод	12,6	0,15	180	7,6	-	-	6,5	1,9	16	8,4	-	1,5	-	9	3	8	11	
55	12А7-100	12Ж1А	Пентод универсальный	12,6	0,075	270	2,0	7,5	0,55	-2,3	1,5	2000	1400	-	2,0	-	-	-	-	12	
56	12А7-67	12С2	Триод	12,6	0,15	250	3,0	-	-	-8	2,6	20	7,7	-	2,5	-	3,4	3,4	3,6	3	
57	12А67	12Н10	Двухнодный триод	12,6	0,15	250	2,0	-	-	-2	1,3	70	5,3	-	2,5	-	2,2	2,0	3,0	16	
58	12А67	12К12Б	Пентод В4 Варимю	12,6	0,15	250	9,2	150	3,4	-2,5	4,0	-	1000	-	3,0	-	6,0	0,005	7,0	12	
59	12А7	12Ж17Б	Пентод В4	12,6	0,15	250	3,0	100	0,8	-3	1,65	2500	1500	-	2,5	-	6,0	0,005	7,0	13	
60	12А7	12К17Б	Пентод В4 Варимю	12,6	0,15	250	9,2	100	2,6	-3	2,0	1600	800	-	4,0	-	6,0	0,005	7,0	13	
61	12А7	12Р17Б	Двухнодный диод-триод	12,6	0,15	250	0,9	-	-	-2	1,1	100	91	-	2,5	-	3,				

Microsure

ТАБЛИЦА ПРИЕМНОУСИЛИТЕЛЬНЫХ РАДИОЛАМП

№ п/п	Обозначение		Тип лампы	Накал		Анод		Экр. сетка		Смещение	Кру. уш.	Коз. уш.	Внутр. сопр.	Сопр. напр.	Мощн. расщ.	Вых. мощн.	Емкосты	Проч. вых.	Примечания	
	старое	новое		U _н	I _н	U _а	I _а	U _с	I _с											E _с
1	954	6ЖКЖ	Пентод УВЧ (жюль)	6,3	0,15	250	2	100	0,7	-3	1,4	1700	1200	-	12	-	3,4	4007	3	29
2	955	6С1Ж	Триод УВЧ (жюль)	6,3	0,15	180	4,3	-	-	-3	2,0	25	123	20	1,5	0,15	3,0	4,4	9,6	30
3	956	6К1Ж	Пентод УВЧ Варимю (жюль)	6,3	0,15	250	6,7	100	2,7	-3	8	1250	700	-	12	-	3,4	4007	3	29
4	9002	6С8Л	Триод миниатюрный	6,3	0,15	90	2,5	-	-	-2,5	1,7	2,5	174	-	1,6	-	1,2	1,1	1,4	6
5	9003	6К19П	Пентод Варимю миниат.	6,3	0,15	250	6,7	100	2,7	-3	1,8	1400	700	-	1,7	-	3,4	0,01	3	4
6	9004	6Д1Ж	Диод УВЧ (жюль)	6,3	0,15	117	3,5	-	-	-	-	-	-	-	-	-	-	-	-	1
7		1А1П	Геттод-преобразователь	1,2	0,05	90	0,8	45	1,9	0	0,25	-	800	-	-	-	-	-	-	1
8		1Б1П	Диод-пентод низкой частоты	1,2	0,06	90	-	3мА	0	0	-	50	-	1000	-	-	-	-	-	1
9		1К1П	Пентод ВЧ Варимю	1,2	0,06	90	1,8	45	0,65	0	0,75	-	800	-	-	-	-	-	-	31
10		2П1П	Оконечный пентод	1,2	0,12	90	9,3	90	2,1	-4,5	2,5	270	100	10	-	0,27	-	-	-	31
11	6А8	6А8Б	Геттод-преобразователь	6,3	0,3	250	3	100	2,7	-3	0,51	100	360	-	1	-	12,5	4006	12,5	26
12	6А87	6К150	Пентод УКВ Варимю	6,3	0,45	300	12,5	200	3,2	-3	5,0	3500	700	-	3	-	8,0	0,015	5,0	13
13	6А87	6К146	Пентод УКВ	6,3	0,45	300	10	150	2,5	-2	9	9000	1000	-	3	-	11	0,008	5	13
14	6АЖ5	6АЖ5	Пентод УКВ миниатюрный	6,3	0,3	250	7	150	2	-8	5	4000	800	-	2	-	6,5	0,025	1,8	4
15	6АЖ7	6Ж45	Тел.визионный видео-пентод	6,3	0,65	300	30	150	7	-3	11	1430	130	-	9	3,0	13	0,06	7,5	12
16	6В8	6В8Б	Двойной диод пентод	6,3	0,3	250	3,0	125	2,3	-3	1,1	730	650	-	2,5	-	6	0,005	9	26
17	6С5М	6С5	Триод	6,3	0,3	250	8,0	-	-	-8	2,0	20	10	10	2,5	0,25	3	2,0	11	5
18	6Г7	6Р7Б	Двойной диод-триод	6,3	0,3	250	1,1	-	-	-3	1,2	70	58	-	2	-	5	1,5	4,5	24
19	6Е5	6Е5	Электронный индикатор	6,3	0,3	250	0,1-5	-	-	-8(0)	0,8	20	25	1000	-	-	-	-	-	2,5
20	6Г5	6С2Б	Триод	6,3	0,3	250	9	-	-	-8	2,6	20	77	-	2,5	-	4,2	3,8	5	3
21	6Г6	6Н1П	Двойной триод миниатюр	6,3	0,45	150	3,0	-	-	-10	5,3	3,8	71	-	1,5	-	2,2	1,6	0,4	5
22	6Г7	6Ж7Б	Пентод ВЧ	6,3	0,3	250	2	100	0,5	-3	1,2	1400	12	-	0,75	-	7	5,0	12	8
23	6К7	6К7Б	Пентод ВЧ Варимю	6,3	0,3	250	7	100	1,7	-3	1,45	1200	800	-	2,25	0,2	7	6,0	12	8
24	6К8	6Д1	Триод-вакуум	6,3	0,3	250	2,5	100	6,0	-3	0,3	-	500	-	0,8	-	6	0,03	5	27
25	6К9М	6К9	Пентод ВЧ Варимю	6,3	0,3	250	9	100	2,6	-3	2,0	1600	800	-	0,8	-	5	0,03	11	8
26	6Н7С	6Н7	Двойной триод класса В	6,3	0,8	300	35	-	-	0	3,2	35	23	8	11	10	4,8	4,0	11	27
27	6П3	6П3	Лучевой тетрод	6,3	0,9	250	7,8	250	7	-14	6,1	130	21	2,5	20,5	6,5	10	4,7	8	9
28	6П5	6С4Б	Триод	6,3	0,3	250	1	-	-	-2	1,6	100	63	-	0,4	0,06	2,2	2,8	3,2	23
29	6П6С	6П6	Оконечный пентод	6,3	0,7	250	3,4	250	7	-16,5	2,5	200	80	7	10	3,2	8	0,5	0,5	9
30	6П6	6П2	Лучевой тетрод	6,3	0,45	250	4,5	250	4,5	-12,5	4,1	250	52	5	12	4,5	9,5	0,7	7,5	9
31	6Ж7	6А1ББ	Геттод-преобразователь	6,3	0,3	250	3,5	100	8,5	0	0,45	-	1000	-	1	-	9,5	0,01	12	15
32	6С17	6Ж7Б	Пентод ВЧ	6,3	0,3	250	3,0	100	0,8	-3	1,65	2500	1500	-	2,5	-	6,0	0,005	7,0	13
33	6С17	6Ж11Б	Пентод ВЧ	6,3	0,3	250	10,8	150	4,1	-1	4,9	4400	900	-	3	-	8,5	0,003	7,0	12
34	6С17	6С18	Двойной триод	6,3	0,3	250	2,3	-	-	-2	1,6	70	44	-	1	-	3,2	2,8	4,5	10
35	6С17	6К17Б	Двойной триод	6,3	0,6	250	9	-	-	-8	2,6	2,0	77	-	2,5	-	3,8	4,4	1,0	10
36	6С17	6К17Б	Пентод ВЧ Варимю	6,3	0,3	250	9,2	100	2,4	-3	2,0	1600	800	-	4	-	6	0,003	7	13
37	6С17	6Р17Б	Двойной диод триод	6,3	0,3	250	0,9	-	-	-2	1,1	100	90	-	2,5	-	3,2	1,6	3,0	14
38	6С17	6Р17Б	Двойной диод триод	6,3	0,3	250	9,5	-	-	-9	1,9	16	8,5	-	2,5	0,3	3,6	2,4	2,8	14
39	6С17	6Н10	Двойной триод	6,3	0,3	250	2,0	-	-	-2	1,4	70	5,0	-	2,5	-	2,2	2,0	3,0	16
40	6С17	6К12Б	Пентод ВЧ Варимю	6,3	0,3	250	11,8	125	4,4	-1	4,7	4200	900	-	3	-	6,5	0,003	7,0	12
41	6С17	6Х6	Двойной диод	6,3	0,3	125	4	-	-	-	1,6	100	63	-	0,4	0,06	2,2	2,8	3,2	23
42	6С17	6А10	Пентод с самовозбужден.	6,3	0,3	250	2,4	100	7,1	-3,0	0,35	-	1000	-	1	-	7,5	0,003	11,0	15
43	6Л7	6А3Б	Геттод-смеситель	6,3	0,3	250	2,4	100	6,5	-3	0,38	700	800	-	1,75	-	7,5	0,001	11,0	22
44	6С-111	6Д1П	Генератор тока телевизора	6,3	1,8	4,4	-	-	-	200	4,4	-	-	-	5	-	2,5	0,001	11,0	22
45	6С20	6Ж8	Пентод малогабаритный УВЧ	6,3	0,5	250	10	100	2,5	-2,4	7,5	15000	2000	-	2,5	-	3,5	0,03	6,25	8
46	6К6	6П4	Оконечный пентод	6,3	0,4	250	3,3	250	5,5	-8	2,3	160	70	-	8,5	3,4	-	-	-	9
47	6С6С	6П4	Оконечный пентод	6,3	0,3	180	1,5	180	2,5	-9	2,3	-	175	-	2,75	1,1	5,5	0,5	7,0	9
48	6С4С	6С6	Оконечный триод	6,3	1,0	250	6,0	-	-	-4,5	5,3	4,2	0,8	2,5	1,5	3,5	7,5	1,6	5,5	2
49	6Ф1	6С17П	Триод-пентод	6,3	0,3	100	3,5	-	-	-3	0,45	8	1,8	-	-	-	2,5	2,0	3,0	7
50			пентод	2,90	6,5	100	1,5	-3	1,1	900	850	-	-	-	-	-	3,2	0,003	12,0	2
51	2С40		Триод УКВ маячковый	6,3	0,75	250	16,5	-	-	-	4,8	35	7,5	-	6,5	0,035	-	-	-	12
52	2С43		Триод УКВ маячковый	6,3	0,9	300	2,6	-	-	-	9,0	4,5	5	-	-	-	-	-	-	2
53	12А6	12П6	Лучевой тетрод	12,6	0,15	250	30	250	3,5	-12,5	3	-	70	-	7,5	3,4	9	0,3	9	9
54	12А7-С1	12Н1	Двойной триод	12,6	0,15	180	7,6	-	-	-6,5	1,9	16	8,4	-	1,5	-	3	3	8	11
55	12А7-С1	12Ж1Л	Пентод универсальный	12,6	0,075	210	2,0	75	0,53	-2,3	1,5	2000	1400	-	2,0	-	2,0	-	-	10
56	12С15-С1	12С2	Триод	12,6	0,15	250	9,0	-	-	-8	2,6	20	7,7	-	2,5	-	3,4	3,4	3,6	3
57	12С17	12Н10	Двойной триод	12,6	0,15	250	2,0	-	-	-2	1,3	70	5,3	-	2,5	-	3,2	2,0	3,0	16
58	12С17	12К12Б	Пентод ВЧ Варимю	12,6	0,15	250	2,0	-	-	-2	1,3	70	5,3	-	2,5	-	3,2	2,0	3,0	16
59	12С17	12К17Б	Пентод ВЧ	12,6	0,15	250	9,2	150	3,4	-2,5	4,0	-	1000	-	3,0	-	6,5	0,003	7,0	12
60	12С17	12К17Б	Пентод ВЧ Варимю	12,6	0,15	250	3,0	100	0,8	-3	1,65	2500	1500	-	2,5	-	6,0	0,005	7,0	13
61	12С17	12Р17Б	Двойной диод-триод	12,6	0,15	250	9,2	100	2,6	-3	2,0	1600	800	-	4,0	-	6,0	0,003	7,0	13
62	12С17	12Р17Б	Двойной диод-триод	12,6	0,15	250	9,9	-	-	-2	1,1	100	34	-	-	-	3,2	1,6	3,0	14
63	12С17	12Р17Б	Двойной диод-триод	12,6	0,15	250	9,5	-	-	-9	1,9	1,6	8							

ТАБЛИЦА ПРИЕМНОУСИЛИТЕЛЬНЫХ РАДИОЛАМП

№ п/п	Обозначение		Тип лампы	Накал		Анод		Экр сетка		Сме-ч	Кру-ч	Коз-ч	Внутр. сопр.	Сопр. напр.	Мощн. вых.	Вых. мощн.	Емкости			Примечания	
	старое	новое		U _г	I _г	U _а	I _а	U _с	I _с								E _г	S	M		R _г
				V	A	V	mA	V	mA	V	mA	кОм	кОм	кОм	Вт	Вт	pF	pF	pF		
1	954	6КЖ	Пентод УВЧ (желез)	6,3	0,15	250	2	100	0,7	-3	14	1700	1200	-	12	-	34	4007	5	29	
2	955	6С1Ж	Триод УВЧ (желез)	6,3	0,15	180	4,3	-	-	-5	2,0	23	12,5	20	12,5	0,13	1,0	1,4	0,6	30	
3	958	6КЖ	Пентод УВЧ Варимю (желез)	6,3	0,15	250	3,7	100	2,7	-3	5	1250	700	-	12	-	34	4007	5	29	
4	9002	6С8П	Триод миниатюрный	6,3	0,15	90	2,5	-	-	-2,5	1,7	2,5	174	-	1,6	-	1,2	1,1	1,4	6	
5	9003	6К19П	Пентод Варимю миниат.	6,3	0,15	250	6,7	100	2,7	-3	1,8	1400	700	-	17	-	34	4007	5	4	
6	9004	6Д1Ж	Диод УВЧ (желез)	6,3	0,15	117	5	-	-	-	-	-	-	-	-	-	-	-	-	7	
7		1А1П	Гетто-преобразователь	1,2	0,05	90	0,8	45	1,9	0	0,25	-	800	-	-	-	-	-	-	-	
8		1Б1П	Диод-пентод низкой частоты	1,2	0,06	90	1,8	45	0,65	0	0	30 ^м	-	1000	-	-	-	-	-	-	
9		1К1П	Пентод ВЧ Варимю	1,2	0,06	90	1,8	45	0,65	0	0,75	-	800	-	-	-	-	-	-	31	
10		2П1П	Оконечный пентод	1,2	0,12	90	3,5	90	2,1	-4,5	2,15	270	100	10	0,27	-	-	-	-	-	
11	6A8	6A8B	Гетто-преобразователь	6,3	0,3	250	3	100	2,7	-3	0,51	100	360	-	1	-	12,5	4004	12,5	26	
12	6A8B	6K15B	Пентод УВЧ варимю	6,3	0,45	300	12,5	200	3,2	-3	5,0	3500	700	-	3	-	8,0	4005	5,0	13	
13	6AC7	6K14B	Пентод УВЧ	6,3	0,45	300	10	150	2,5	-2	9	9000	1000	-	3	-	11	4008	5	13	
14	6AC5	6AЖ5	Пентод УВЧ миниатюрный	6,3	0,3	230	7	150	2	-8	5	4000	800	-	2	-	6,5	0025	1,8	4	
15	6AC7	6Ж15	Телевизионный ВЧ-пентод	6,3	0,65	300	30	150	7	-3	11	1430	130	-	9	30	13	0,06	7,5	12	
16	6AB	6BB8	Двойной диод пентод	6,3	0,3	250	3,0	125	2,3	-3	11	730	650	-	2,5	-	6	0005	9	26	
17	6C3M	6C5	Триод	6,3	0,3	250	8,0	-	-	-8	2,0	2,0	10	10	2,5	0,25	3	2,0	11	3	
18	6G7	6P7B	Двойной диод-триод	6,3	0,3	250	1,1	-	-	-3	1,2	70	58	-	2	-	1,5	-	-	24	
19	6E5	6E5	Электронный индикатор	6,3	0,3	250	0,1-5	-	-	-8(0)	0,8	2,0	25	1000	-	-	-	-	-	23	
20	6J6	6C2B	Триод	6,3	0,3	250	9	-	-	-8	2,6	2,0	77	-	2,5	-	4,2	3,8	5	3	
21	6J6	6H1P	Двойной триод миниатюр	6,3	0,45	150	3,0	-	-	-10	5,3 ^м	3,8	71	-	1,5 ^м	-	2,2	1,6	0,4	5	
22	6J7	6J7B	Пентод ВЧ	6,3	0,3	250	2	100	0,5	-3	1,2	1400	12	-	0,75	-	7	500	12	8	
23	6K7	6K7B	Пентод ВЧ Варимю	6,3	0,3	250	7	100	1,7	-3	1,45	1200	800	-	2,25	0,2	7	4004	12	8	
24	6KB	6D1	Триод-сексо	6,3	0,3	230	7,5	100	1,7	-3	0,3 ^м	-	500	-	0,5	-	6	0,03	5	27	
25	6K9M	6K9	Пентод ВЧ Варимю	6,3	0,3	250	9	100	2,6	-3	2,0	1600	800	-	3	-	8	0005	11	8	
26	6H7C	6H7	Двойной триод класса В	6,3	0,8	300	3,5 ^м	-	-	0 ^м	3,2 ^м	35 ^м	23 ^м	8 ^м	11 ^м	10 ^м	4,3	2,4	3,1	21	
27	6P5	6P5	Лучевой тетрод	6,3	0,3	250	7,8	250	7	-14	6,1	130	21	2,5	20,5	6,5	7,0	4,0	8	9	
28	6P6	6C4B	Триод	6,3	0,3	250	1	-	-	-2	1,6	100	63	-	0,4	0,06	2,2	2,8	3,2	23	
29	6P6C	6P2	Оконечный пентод	6,3	0,7	250	34	250	7	-16,5	2,5	200	80	7	10	3,2	8	0,5	6,5	9	
30	6V6	6P2	Лучевой тетрод	6,3	0,45	250	4,5	250	4,5	-12,5	4,1	250	52	5	12	4,5	9,5	0,7	7,5	9	
31	6X4T	6A15B	Гетто-преобразователь	6,3	0,9	250	3,5	100	8,5	0	0,45	-	1000	-	1	-	9,5	4008	12	15	
32	6X7	6Ж-7B	Пентод ВЧ	6,3	0,3	250	3,0	100	0,8	-3	1,65	2500	1500	-	2,5	-	6,0	0005	7,0	13	
33	6SN7	6K11B	Пентод ВЧ	6,3	0,3	250	10,8	150	4,1	-1	4,9	4400	900	-	3	-	8,5	0003	7,0	12	
34	6SL7	6H9	Двойной триод	6,3	0,3	250	2,3 ^м	-	-	-2 ^м	1,6	70	44 ^м	-	1	-	3,2	2,8	1,5	10	
35	6SN7	6H8	Двойной триод	6,3	0,6	250	9 ^м	-	-	-8 ^м	2,6	2,0 ^м	77 ^м	-	2,5	-	3 ^м	4 ^м	1,0 ^м	10	
36	6SK7	6K17B	Пентод ВЧ Варимю	6,3	0,3	250	9,2	100	2,4	-3	2,0	1600	800	-	4	-	6	0003	7	13	
37	6SQ7	6P17B	Двойной диод триод	6,3	0,3	250	0,9	-	-	-2	1,1	100	90	-	2,5	-	3,2	1,6	3,0	14	
38	6SR7	6P15	Двойной диод триод	6,3	0,3	250	9,5	-	-	-9	1,9	16	8,5	-	2,5	0,3	3,6	2,4	2,8	14	
39	6SC7	6H10	Двойной триод	6,3	0,3	250	2,0 ^м	-	-	-2	1,4	70	50	-	2,2	-	2,2	2,0	3,0	16	
40	6SC7	6K12B	Пентод ВЧ Варимю	6,3	0,3	250	11,8	12,5	4,4	-1	4,7	4200	900	-	3	-	8,5	0003	7,0	12	
41	6X6M	6X6	Двойной диод	6,3	0,3	125	4	-	-	-	-	-	-	-	-	-	-	-	-	12	
42	6SA7GT	6A10	Пентод с самовозбужден	6,3	0,3	250	2,4	100	7,1	-3,0	0,35 ^м	-	1000	-	1	-	7,5	0004	11,0	15	
43	6L7	6A5B	Пентод-смеситель	6,3	0,3	250	2,4	100	6,5	-3	0,38 ^м	700	800	-	1,75	-	7,5	0001	11,0	22	
44	6E5-1H1	6D1P	Генератор тока телевизор	6,3	1,8	44	-	200	1	-	4,4	-	-	-	-	-	-	-	-	2,8	
45	6Z20	6Ж8	Пентод малогабаритный УВЧ	6,3	0,5	250	10	100	2,5	-2,4	7,5	15000	2000	-	2,5	-	9,5	0,03	6,25	8	
46	6K6	6P1	Оконечный пентод	6,3	0,4	250	3,3	250	5,5	-8	2,3	160	70	-	8,5	3,4	-	-	-	9	
47	6C6-C	6P4	Оконечный пентод	6,3	0,3	180	15	180	2,5	-9	2,3	-	175	-	2,75	11	5,5	0,5	7,0	9	
48	6B4-C	6C6	Оконечный триод	6,3	1,0	250	6,0	-	-	-4,5	5,3	4,2	0,8	2,5	1,5	3,5	7,5	1,6	5,5	2	
49	6F1	6C177	Триод-пентод	6,3	0,3	100	3,5	-	-	-3	0,45	8	18	-	-	-	2,5	2,0	3,0	7	
50	2C40		пентод	2,50	6,5	100	1,5	-	-	-1,1	9,0	850	-	-	-	-	3,2	0,028	12,0	2	
51	2C40		Триод УВЧ маячковый	6,3	0,75	250	16,5	-	-	-	4,8	35	7,5	-	6,5	0,035	-	-	-	2	
52	2C43		Триод УВЧ маячковый	6,3	0,9	300	2,8	-	-	-	9,0	45	5	-	-	-	-	-	-	2	
53	12A6	12P6	Лучевой тетрод	12,6	0,15	250	3,0	250	3,5	-12,5	3	-	70	-	7,5	3,4	9	0,3	9	9	
54	12AU6	12H1	Двойной триод	12,6	0,15	180	7,6	-	-	-6,5	1,9	16	8,4	-	2,5	-	9	9	9	11	
55	12AR10	12H11	Пентод универсальный	12,6	0,075	210	2,0	7,5	0,55	-2,3	1,5	2000	1400	-	2,0	-	2,0	-	-	18	
56	12BE6	12C2	Триод	12,6	0,15	250	9,0	-	-	-8	2,6	20	7,7	-	2,5	-	3,4	3,4	3,6	3	
57	12SC7	12H10	Двойной триод	12,6	0,15	250	2,0	-	-	-2	1,3	70	53	-	2,5	-	2,2	2,0	3,0	16	
58	12SQ7	12K12B	Пентод ВЧ Варимю	12,6	0,15	250	9,2	150	3,4	-2,5	4,0	-	1000	-	3,0	-	8,5	0,003	7,0	12	
59	12SV7	12J17B	Пентод ВЧ	12,6	0,15	250	3,2	100	4,8	-3	1,65	2500	1500	-	2,5	-	6,0	0,005	7,0	13	
60	12SK7	12K17B	Пентод ВЧ Варимю	12,6	0,15	250	3,2	100	4,8	-3	1,65	2500	1500	-	2,5	-	6,0	0,005	7,0	13	
61	12SQ7	12P17B	Двойной диод-триод	12,6	0,15	250	9,2	100	2,6	-3	2,0	1600	800	-	4,0	-	6,0	0,003	7,0	13	
62	12SR7	12P15B	Двойной диод-триод	12,6	0,15	250	9,9	-	-	-2	1,1	100	91	-	-	-	3,2	1,6	3,0	14	
63	1B-1		Триод генераторный ДЦВ	12,6	0,1	300	-	-	-	-9	1,9	1,6	8,5	-	2,6	0,3	3,6	2,4	2,8	14	
64	1B-12		Триод генераторный ДЦВ	12,6	0,1	300	-	-	-	-5	1,1	-	-	-	2,6	0,3	3,6	2,4	2,8	14	
65	829		Двойной пентод генераторный	6,3	0,3	250	3,0	240	3,0	-4,5	1,0	-	-	-	4,0	2,7	10	0,04	2,5		
66	832		Двойной пентод генераторный	6,3	0,3	250	3,0	240	3,0	-4,5	1,0	-	-	-	4,0	2,7	10	0,04	2,5		
67	F-411	КК1	Пентод генераторный	10	0,6	400	9,5	250	8	-5,0	5,5	2,0	170	-	2,0	2,0	3,5	0,3	7,5		
68	807	КЖ2	Тетрод лучевой	6,3	0,9	600	80	300	5-10	-80	6	-	-	-	8,0	11	9,2	7			
69	1625	КЖ3	Пентод лучевой	12,6	0,45	600	10-20	300	5-10	-30	6	-	-	-	8,0	11	9,2	7			

ТАБЛИЦА ПРИЕМНОУСИЛИТЕЛЬНЫХ РАДИОЛАМП

№ п/п	Обозначение		Тип лампы	Накал		Анод		Экр. сетка		Сте.-Кру.		Коз.		Внут. сопр.		Мощн. вых.		Емкости			Примечания	
	старое	новое		U _г	I _г	U _а	I _а	U _с	I _с	U _к	I _к	U _к	I _к	R _г	R _а	W _г	W _а	C _г	C _а	C _с		
1	954	6Ж1Ж	Триод УВЧ (желез.)	6,3	0,15	250	2	100	0,7	-3	1,4	1700	1200	-	12	-	3,4	4,0	3	29		
2	955	6С1Ж	Триод УВЧ (желез.)	6,3	0,15	180	4,3	-	-	-5	2,0	2,5	12,5	20	1,5	0,13	1,0	4,4	0,6	3,0		
3	958	6Ж1Ж	Пентод УВЧ Вириню (желез.)	6,3	0,13	250	6,7	100	2,7	-3	1,8	1250	700	-	12	-	3,4	4,0	3	29		
4	9002	6С8П	Триод миниатюрный	6,3	0,18	90	2,5	-	-	-2,5	1,7	2,5	17,4	-	-	-	1,2	1,1	4,4	6		
5	9003	6Ж19П	Пентод Бариню миниат.	6,3	0,15	250	6,7	100	2,7	-3	1,8	1400	700	-	1,7	-	3,4	4,0	3	4		
6	9004	6Д1Ж	Диод УВЧ (желез.)	6,3	0,15	117	5,3	-	-	-	-	-	-	-	-	-	-	-	-	-	1	
7		1А1П	Пентод-преобразователь	1,2	0,05	90	0,8	4,5	1,9	0	0,25	-	800	-	-	-	-	-	-	-		
8		1Б1П	Диод-пентод низкой частоты	1,2	0,06	90	-	4,5	0,5	0	0,75	50	1000	-	-	-	-	-	-	-		
9		1К1П	Пентод ВЧ Вариню	1,2	0,06	90	1,8	4,5	0,65	0	0,75	-	800	-	-	-	-	-	-	-		
10		2П1П	Оконечный пентод	1,2	0,12	90	3,5	90	2,1	-4,5	2,15	270	100	10	-	0,27	-	-	-	-	31	
11	6А8	6А8Б	Пентод-преобразователь	6,3	0,3	250	3	100	2,7	-3	0,31	100	360	-	1	-	12,5	4,0	12,5	26		
12	6А87	6Ж15Б	Пентод УКВ Вириню	6,3	0,45	300	12,5	200	3,2	-3	5,0	3500	700	-	1	-	8,0	0,015	5,0	13		
13	6А87	6Ж14Б	Пентод УКВ	6,3	0,45	300	10	150	2,5	-2	9	9000	1000	-	3	-	11	4,0	5	13		
14	6А85	6АЖ5	Пентод УКВ миниатюрный	6,3	0,3	250	7	150	2	-8	5	4000	800	-	2	-	4,5	0,025	1,8	4		
15	6А87	6Ж15	Телевизионный видео-пентод	6,3	0,65	300	30	150	7	-3	11	1430	130	-	9	3,0	13	0,06	7,5	12		
16	6Б8	6Б8Б	Двойной диод пентод	6,3	0,3	250	8,0	12,5	2,3	-3	1,1	730	650	-	2,5	-	6	0,005	9	2,6		
17	6С3М	6С5	Триод	6,3	0,3	250	8,0	-	-	-8	2,0	2,0	10	10	2,5	0,25	3	2,0	11	3		
18	6Г7	6Р7Б	Двойной диод-триод	6,3	0,3	250	11	-	-	-3	1,2	70	58	-	2	-	8	1,5	4,5	24		
19	6Е5	6Е5	Электронный индикатор	6,3	0,3	250	0,1-5	-	-	-8(0)	0,8	20	2,5	1000	-	-	-	-	-	-	2,9	
20	6Л8	6С2Б	Триод	6,3	0,3	250	9	-	-	-8	2,6	20	77	-	2,5	-	4,2	3,8	5	3		
21	6Л6	6М1П	Двойной триод миниатюр.	6,3	0,45	150	30	-	-	-10	5,3	38	71	-	1,5	-	2,2	1,6	0,4	5		
22	6Л7	6Ж7Б	Пентод ВЧ	6,3	0,3	250	2	100	0,5	-3	1,2	1400	10	-	0,75	-	7	2,0	12	8		
23	6К7	6К7Б	Пентод ВЧ Вариню	6,3	0,3	250	7	100	1,7	-3	1,45	1200	800	-	2,25	0,2	7	4,0	12	8		
24	6К8	6Д1	Триод-вакуум.	6,3	0,3	250	2,5	100	2,0	-3	0,3	-	500	-	0,5	-	6	0,03	5	27		
25	6К8	6К9	Пентод ВЧ Вариню	6,3	0,3	250	9	100	2,6	-3	2,0	1600	800	-	0,5	-	6	0,03	5	27		
26	6Н7С	6Н7	Двойной триод класса В	6,3	0,8	300	3,5	-	-	0,1	3,2	35	23	-	11	10	4,8	4,0	11	8		
27	6П3	6П3	Лучевой тетрод	6,3	0,8	250	7,8	250	7	-14	6,1	130	21	2,5	20,5	6,5	10	4,0	8	9		
28	6Р8	6С4Б	Триод	6,3	0,3	250	1	-	-	-2,5	1,6	100	63	-	0,4	0,06	2,2	2,8	3,2	23		
29	6У8	6П2	Оконечный пентод	6,3	0,7	250	34	250	7	-16,5	2,5	200	80	7	10	3,2	8	0,5	6,5	9		
30	6У8	6А1Б	Лучевой тетрод	6,3	0,45	250	4,5	250	4,5	-12,5	4,1	250	52	5	12	4,5	3,5	0,7	7,5	9		
31	6С7	6Ж7Б	Пентод ВЧ	6,3	0,3	250	30	100	0,8	-3	1,65	2500	1500	-	2,5	-	6,0	0,005	7,0	13		
32	6СН7	6Ж11Б	Пентод ВЧ	6,3	0,3	250	10,8	150	4,1	-1	4,9	4400	900	-	3	-	8,5	0,003	7,0	12		
33	6СН7	6Н3	Двойной триод	6,3	0,3	250	23	-	-	-8	1,6	70	44	-	1	-	3,2	2,8	3,5	10		
34	6СН7	6Н8	Двойной триод	6,3	0,6	250	9	-	-	-8	2,6	20	77	-	2,5	-	4,4	4,0	10	10		
35	6СН7	6Ж7Б	Пентод ВЧ Вариню	6,3	0,3	250	9,2	100	2,4	-3	2,0	1600	800	-	4	-	6	0,003	7	13		
36	6СН7	6Р7Б	Двойной диод триод	6,3	0,3	250	0,9	-	-	-2	1,1	100	90	-	2,5	-	3,2	1,6	3,0	14		
37	6СН7	6Р7Б	Двойной диод триод	6,3	0,3	250	9,5	-	-	-9	1,9	16	8,5	-	2,5	0,3	3,6	2,4	2,8	14		
38	6СН7	6Н10	Двойной триод	6,3	0,3	250	20	-	-	-2	1,4	70	50	-	2,5	-	2,2	2,0	3,0	16		
39	6СН7	6К12Б	Пентод ВЧ Вариню	6,3	0,3	250	11,8	12,5	4,4	-1	4,7	4200	900	-	3	-	8,5	0,003	7,0	12		
40	6Х6М	6Х6	Двойной диод	6,3	0,3	125	4,4	-	-	-8	2,6	20	77	-	2,5	-	4,4	4,0	10	10		
41	6А10	6А10	Пентод с самовозбуждением	6,3	0,3	250	24	100	7,1	-3,0	0,35	-	1000	-	1	-	7,5	0,005	11,0	15		
42	6Л7	6А5Б	Пентод-смеситель	6,3	0,3	250	24	100	6,5	-3	0,38	700	800	-	1,75	-	7,5	0,001	11,0	22		
43	Е5-111	6Д1П	Генератор тока телевизион.	6,3	1,8	44	-	200	1	+4,4	-	-	-	-	5	-	-	-	-	2,8		
44	Е5-220	6ЖВ	Пентод маломощный УВЧ	6,3	0,5	250	10	100	2,5	-2,4	7,5	15000	2000	-	2,5	-	3,3	0,03	6,25	8		
45	6К6	6П4	Оконечный пентод	6,3	0,4	250	33	250	5,5	-8	2,3	160	70	-	8,5	3,4	-	-	-	9		
46	6С6-6	6П4	Оконечный пентод	6,3	0,3	180	15	180	2,5	-9	2,3	-	175	-	8,75	11	5,5	0,5	7,0	9		
47	6С6-6	6П4	Оконечный пентод	6,3	1,0	250	60	-	-	-4,5	3,3	42	0,8	2,5	15	3,5	7,5	1,6	5,5	2		
48	6А4-6	6С6	Оконечный триод	6,3	0,3	100	3,5	-	-	-3	0,45	8	18	-	2,5	-	2,5	2,0	3,0	7		
49	6Ф7	6С177	Триод-пентод	6,3	0,25	6,5	100	1,5	-3	1,1	900	850	-	-	-	3,2	0,008	12,0	12			
50	2С40		Пентод	6,3	0,25	250	16,5	-	-	-4,8	3,5	7,5	-	-	6,5	0,035	-	-	-	2		
51	2С43		Триод УКВ маячковый	6,3	0,9	300	2,6	-	-	-2,0	4,5	5	-	-	-	-	-	-	-	2		
52	12А6	12П6	Лучевой тетрод	12,6	0,15	250	30	250	3,5	-12,5	3	-	70	-	7,5	3,4	9	0,3	9	9		
53	12А6-61	12Н1	Двойной триод	12,6	0,15	180	7,6	-	-	-6,5	1,9	16	8,4	-	1,5	-	9	9	8	11		
54	12А6-61	12Ж11	Пентод универсальный	12,6	0,075	210	2,0	75	0,55	-2,3	1,5	2000	1400	-	2,0	-	8,0	-	-	16		
55	12С67	12С2	Триод	12,6	0,15	250	9,0	-	-	-8	2,6	20	77	-	2,5	-	4,4	4,0	10	10		
56	12С67	12Н10	Двойной триод	12,6	0,15	250	2,0	-	-	-2	1,9	70	53	-	2,5	-	3,4	3,4	3,6	3		
57	12С67	12К12Б	Пентод ВЧ Вариню	12,6	0,15	250	9,2	150	3,4	-2,5	4,0	-	1000	-	3,0	-	8,2	2,0	3,0	16		
58	12С67	12Ж17Б	Пентод ВЧ	12,6	0,15	250	3,0	100	0,8	-3	1,65	2500	1500	-	2,5	-	6,0	0,005	7,0	12		
59	12С67	12К11Б	Пентод ВЧ Вариню	12,6	0,15	250	8,2	100	2,6	-3	2,0	1600	800	-	4,0	-	6,0	0,003	7,0	13		
60	12С67	12Р17Б	Двойной диод-триод	12,6	0,15	250	0,9	-	-	-2	1,1	100	91	-	-	-	3,2	1,6	3,0	14		
61	12С67	12Р15	Двойной диод-триод	12,6	0,15	250	9,5	-	-	-9	1,9	1,6	8,5	-	-	-	3,2	1,6	3,0	14		
62	10-1		Триод генераторный ДЦВ	12,6	0,1																	

ТАБЛИЦА ПРИЕМНОУСИЛИТЕЛЬНЫХ РАДИОЛАМП

№	Обозначение		Тип лампы	Накал		Анод		Экр. сетка		Сме. катоды	Кру. уст.	Коз. уст.	Внут. сопр.	Мощн. сопр.	Мощн. вых.	Вых. мощн.	Емкости			Примечания		
	старое	новое		нап. Цз	ток Jz	напр. Ua	ток Ia	напр. Uсз	ток Is								напр. Es	напр. S	напр. M		напр. R _к	напр. R _с
1	954	6Ж1Ж	Пентод 6В4 (желез)	6,3	0,15	250	2	100	0,7	-3	14	1700	1200	-	12	-	34	4007	3	29		
2	955	6С1Ж	Триод 6В4 (желез)	6,3	0,15	180	4,3	100	0,7	-3	20	25	123	20	1,5	0,73	1,0	44	46	30		
3	958	6К1Ж	Пентод 6В4 Варимю (желез)	6,3	0,15	250	6,7	100	2,7	-3	8	720	700	-	12	-	34	4007	3	29		
4	9002	6С8Л	Триод миниатюрный	6,3	0,18	90	2,5	-	-	-2,5	1,7	25	174	-	1,6	-	1,2	1,1	1,4	6		
5	9003	6К19П	Пентод Варимю миниат.	6,3	0,15	250	6,7	100	2,7	-3	1,8	1400	700	-	1,7	-	34	4007	3	4		
6	9004	6Д1Ж	Диод 6В4 (желез)	6,3	0,15	117	5,5	-	-	-	-	-	-	-	-	-	-	1,3	1	1		
7	1А1П	Гелтод-преобразователь	12	0,06	90	0,8	45	1,9	0	0,25	-	800	-	-	-	-	-	-	-	-		
8	1Б1П	Диод-пентод низкой частоты	1,2	0,06	90	-	3мх	0	0	-	50 ^м	-	1000	-	-	-	-	-	-	-		
9	1К1П	Пентод 6Ч Варимю	12	0,06	90	1,8	45	0,65	0	0,75	-	800	-	-	-	-	-	-	-	31		
10	2П1П	Оконечный пентод	1,2 ^н	0,12 ^н	90	9,5	90	2,1	-4,5	2,15	270	100	10	-	0,27	-	-	-	-	-		
11	6А5	6А5Б	Гелтод-преобразователь	6,3	0,3	250	3	100	2,7	-3	0,51	100	360	-	1	-	12,5	4006	12,5	2,6		
12	6АВ7	6К15Б	Пентод УКВ Варимю	6,3	0,45	300	12,5	200	3,2	-3	5,0	3500	700	-	3	-	8,0	4005	5,0	1,3		
13	6АС7	6К14Б	Пентод УКВ	6,3	0,45	300	10	150	2,5	-2	9	9000	1000	-	3	-	11	4008	5	1,3		
14	6АС5	6АЖ5	Пентод УКВ миниатюрный	6,3	0,3	250	7	150	2	-8	5	4000	800	-	2	-	6,5	0,25	1,8	4		
15	6АС7	6Ж4Б	Телевизионный видео-пентод	6,3	0,65	300	30	150	7	-3	11	1430	130	-	9	3,0	13	406	7,5	1,2		
16	6ВБ	6ВББ	Двойной диод пентод	6,3	0,3	250	9,0	125	2,3	-3	11	730	650	-	2,5	-	6	0,005	9	2,6		
17	6С5М	6С5	Триод	6,3	0,3	250	8,0	-	-	-8	2,0	20	10	10	2,5	0,25	3	2,0	11	3		
18	6Г7	6Р7Б	Двойной диод-триод	6,3	0,3	250	11	-	-	-3	1,2	70	58	-	2	-	5	1,5	4,5	24		
19	6Е5	6Е5	Электронный индикатор	6,3	0,3	250	0,1-5	-	-	-8(0)	0,8	20	25	1000	-	-	-	-	-	-	2,5	
20	6Д8	6С2Б	Триод	6,3	0,3	250	9	-	-	-8	2,6	20	77	-	2,5	-	4,2	3,8	5	3		
21	6Д6	6Н1Б	Двойной триод миниатюр	6,3	0,45	150	3,0	-	-	-10	5,3	38	71	-	1,5 ^н	-	2,2	1,6	0,4	5		
22	6Д7	6Ж7Б	Пентод 6Ч	6,3	0,3	250	2	100	0,5	-3	1,2	1400	12	-	0,75	-	7	4005	12	8		
23	6К7	6К7Б	Пентод 6Ч Варимю	6,3	0,3	250	7	100	1,7	-3	1,45	1200	800	-	2,25	0,2	7	4005	12	8		
24	6К8	6Д1	Триод-вакуум	6,3	0,3	250	2,5	100	6,0	-3	0,3 ^н	-	500	-	0,8	-	6	0,03	5	27		
25	6К9М	6К9	Пентод 6Ч Варимю	6,3	0,3	250	9	100	2,6	-3	0,1	1600	800	-	3	-	4,8	4003	11	8		
26	6Н7Б	6Н7	Двойной триод класса В	6,3	0,8	300	35 ^н	-	-	0 ^н	3,2 ^н	35 ^н	23 ^н	8 ^н	11 ^н	10 ^н	4,3	2,4	5,4	21		
27	6П3	6С4Б	Лучевой тетрод	6,3	0,9	250	7,8	250	7	-14	6,1	130	21	2,5	20,5	6,5	10	47,0	8	9		
28	6П5	6С4Б	Триод	6,3	0,3	250	1	-	-	-2	1,6	100	63	-	0,4	0,06	2,2	2,8	3,2	2,3		
29	6Ф6С	6П6	Оконечный пентод	6,3	0,7	250	3,4	250	7	-16,5	2,5	200	80	7	10	3,2	8	0,5	6,5	9		
30	6В8	6П2	Лучевой тетрод	6,3	0,45	250	4,5	250	4,5	-12,5	4,1	250	52	5	12	4,5	9,6	0,7	7,5	9		
31	6З4Т	6А15Б	Гелтод-преобразователь	6,3	0,5	250	3,5	100	8,0	0	0,45	-	1000	-	1	-	9,5	4008	12	15		
32	6С17	6Ж17Б	Пентод 6Ч	6,3	0,3	250	3,0	100	0,8	-3	1,65	2500	1500	-	2,5	-	6,0	0,005	7,0	13		
33	6С17	6Ж11Б	Пентод В4	6,3	0,3	250	10,8	150	4,1	-1	4,9	4400	900	-	1	-	8,5	0,003	10	12		
34	6С17	6Н9	Двойной триод	6,3	0,3	250	23 ^н	-	-	-2 ^н	1,6	70	44 ^н	-	1	-	3,2	2,8	3,5	10		
35	6С17	6Н8	Двойной триод	6,3	0,6	250	9 ^н	-	-	-8 ^н	2,6	20 ^н	77 ^н	-	1	-	3,2	2,8	3,5	10		
36	6С17	6К17Б	Пентод 6Ч Варимю	6,3	0,3	250	9,2	100	2,4	-3	2,0	1600	800	-	2,5	-	6	0,003	7	13		
37	6С17	6Р17Б	Двойной диод-триод	6,3	0,3	250	0,9	-	-	-2	1,1	100	90	-	4	-	6	0,003	7	13		
38	6С17	6Р15Б	Двойной диод-триод	6,3	0,3	250	0,5	-	-	-9	1,9	16	85	-	2,5	0,3	3,2	1,6	3,0	14		
39	6С17	6Н10	Двойной триод	6,3	0,3	250	2,0 ^н	-	-	-9	1,9	16	85	-	2,5	0,3	3,6	2,4	2,8	14		
40	6С17	6К12Б	Пентод 6Ч Варимю	6,3	0,3	250	11,8	125	4,4	-1	4,7	70	50	-	2,2	-	2,2	2,0	3,0	16		
41	6Х6М	6Х6	Двойной диод	6,3	0,3	125	4 ^н	-	-	-1	4,7	4200	900	-	3	-	8,5	0,003	7,0	12		
42	6А10Т	6А10	Пентод с самовозбужден.	6,3	0,3	250	2,4	100	7,1	-3,0	0,35 ^н	-	1000	-	1	-	7,5	0,003	11,0	15		
43	6Л17	6А25Б	Гелтод-смеситель	6,3	0,3	250	2,4	100	6,5	-3	0,38 ^н	700	800	-	1,75	-	7,5	0,001	13,0	22		
44	Е-111	6Д11П	Генератор тока телевизор	6,3	1,8	44	-	-	-	200 ^н	4,4	-	-	-	5	-	-	-	-	-	2,8	
45	7Б20	6ЖВ	Пентод маловаримюный 6В4	6,3	0,5	250	10	100	2,5	-2,4	7,5	15000	2000	-	2,5	-	9,5	0,03	6,25	8		
46	6К6	6П4	Оконечный пентод	6,3	0,4	250	3,3	250	5,5	-8	2,3	160	70	-	8,5	3,4	-	-	-	9		
47	6С6С-С	6П4	Оконечный пентод	6,3	0,3	180	15	180	2,5	-9	2,3	-	175	-	8,75	11	5,6	0,5	7,0	9		
48	6А4-С	6СБ	Оконечный триод	6,3	1,0	250	6,0	-	-	-4,5	5,3	42	0,8	2,5	1,5	3,5	7,5	1,6	3,5	2		
49	6Р7	6С17Т	Триод-пентод	6,3	0,3	100	3,5	-	-	-3	0,45	8	18	-	-	-	2,5	2,0	3,0	7		
50	2С40	Пентод	пентод	6,3	0,2	250	6,5	100	1,5	-3	1,1	900	850	-	-	-	3,2	0,003	12,0	7		
51	2С40	Триод	Триод УКВ маячковый	6,3	0,75	250	16,5	-	-	-	4,2	35	7,5	-	6,5	0,0035	-	-	-	2		
52	2С43	Триод	Триод УКВ маячковый	6,3	0,9	300	2,6	-	-	-	4,2	35	7,5	-	6,5	0,0035	-	-	-	2		
53	12А6	12Н6	Лучевой тетрод	12,6	0,21	250	3,0	250	3,5	-12,5	3	-	70	-	7,5	3,4	9	0,3	9	9		
54	12Н7-ГТ	12Н1	Двойной триод	12,6	0,15	180	7,6	-	-	-6,5	1,9	16	8,4	-	1,5	-	9	3	8	11		
55	12Н7-ГТ	12К1Л	Пентод универсальный	12,6	0,075	210	2,0	75	0,55	-2,3	1,5	2000	1400	-	8,0	-	-	-	-	18		
56	12Н7-ГТ	12С2	Триод	12,6	0,15	250	9,0	-	-	-8	2,6	20	7,7	-	8,5	-	3,4	3,4	3,6	3		
57	12С57	12Н10	Двойной триод	12,6	0,15	250	2,0	-	-	-2	1,3	70	53	-	8,2	-	2,0	3,0	3,0	16		
58	12С57	12К12Б	Пентод 6Ч Варимю	12,6	0,15	250	9,2	150	3,4	-2,5	4,0	-	4000	-	3,0	-	8,5	0,003	7,0	12		
59	12С57	12К17Б	Пентод 6Ч	12,6	0,15	250	3,0	100	0,8	-3	1,65	2500	1500	-	2,5	-	6,0	0,003	7,0	13		
60	12С17	12К17Б	Пентод 6Ч Варимю	12,6	0,15	250	9,2	100	2,6	-3	2,0	1600	800	-	4,0	-	6,0	0,003	7,0	13		
61	12С17																					

ТАБЛИЦА ПРИЕМНОУСИЛИТЕЛЬНЫХ РАДИОЛАМП

№	Обозначение % старое новое	Тип лампы	Накал		Анод		Экр сетка		Сте- пен- нагр	Кру- тизм	Коз- ушлен	Внутр сопр	Сопр нагр	Мощн расс иноз	Вых мощн	Емкости			Примечания		
			U _г	I _г	U _а	I _а	U _с	I _с								E _г	S	M		R _с	R _а
			V	A	V	mA	V	mA	V	mA	кВ	кВ	кВ	кВ	кВ	кВ	кВ	кВ	кВ	кВ	кВ
1	954	6ЖКЖ	6,3	0,15	250	2	100	0,7	-	3	1,4	1700	1200	-	12	-	3,4	400	3	29	
2	955	6С1Ж	6,3	0,15	180	4,3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
3	958	6К1Ж	6,3	0,15	250	6,7	100	2,7	-	3	1,5	1250	700	-	12	-	3,4	400	3	30	
4	9002	6С8Л	6,3	0,16	90	2,5	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
5	9003	6К19Л	6,3	0,16	250	6,7	100	2,7	-	3	1,5	1400	700	-	12	-	3,4	400	3	29	
6	9004	6Д1Ж	6,3	0,15	117	5,5	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
7		1А1П	1,2	0,05	90	0,8	45	1,9	0	0,25	-	800	-	-	-	-	-	-	-	-	
8		1Б1П	1,2	0,06	90	0,8	45	1,9	0	0,25	-	800	-	-	-	-	-	-	-	-	
9		1К1П	1,2	0,06	90	1,8	45	0,65	0	0,75	-	800	-	-	-	-	-	-	-	-	
10		2П1П	1,2	0,12	90	9,5	90	2,1	-4,5	2,15	270	100	10	-	0,27	-	-	-	-	-	
11	6А8	6А8Б	6,3	0,3	250	3	100	2,7	-3	0,31	100	360	-	1	-	12,5	400	12,5	26		
12	6А87	6К15Б	6,3	0,45	300	12,5	200	3,2	-3	5,0	3500	700	-	3	-	8,0	600	5,0	13		
13	6А87	6К15Б	6,3	0,45	300	10	150	2,5	-2	9,0	9000	1000	-	3	-	11	600	5	13		
14	6А85	6АЖ5	6,3	0,3	250	7	150	2	-8	5	4000	800	-	2	-	6,5	0,025	1,8	4		
15	6А87	6Ж-45	6,3	0,65	300	30	150	7	-3	11	1430	130	-	9	3,0	13	0,06	7,5	12		
16	6Б8	6Б8Б	6,3	0,3	250	9,0	125	2,3	-3	1,1	730	650	-	2,5	-	6	0,005	9	2,5		
17	6С3М	6С5	6,3	0,3	250	8,0	-	-	-	8	20	20	10	2,5	0,25	3	2,0	11	2,5		
18	6Г7	6Р7Б	6,3	0,3	250	1,1	-	-	-	3	12	70	58	-	-	-	1,5	4,5	2,4		
19	6Е5	6Е5	6,3	0,3	250	0,1-5	-	-	-	8(0)	0,8	20	25	1000	-	-	-	-	-	2,9	
20	6Л5	6С2Б	6,3	0,3	250	9	-	-	-	8	2,6	20	7,7	-	2,5	-	4,2	3,8	5	3	
21	6Л6	6Н1П	6,3	0,45	150	30	-	-	-	10	5,3	38	7,1	-	1,5	-	2,2	1,6	0,4	5	
22	6Л7	6Ж7Б	6,3	0,3	250	2	100	0,5	-3	1,2	1400	10	-	0,75	-	7	5,0	12	8		
23	6К7	6К7Б	6,3	0,3	250	7	100	1,7	-3	1,5	1200	800	-	2,25	0,2	7	6,0	12	8		
24	6К8	6Д1	6,3	0,3	250	2,5	100	6,0	-3	0,3*	500	-	-	0,5	-	6	0,03	5	2,7		
25	6К9М	6К9	6,3	0,3	250	9	100	2,6	-3	2,0	1600	800	-	2,5	-	4,8	0,005	7,1	8		
26	6Н7С	6Н7	6,3	0,8	300	3,5	-	-	-	0,1	3,2	35	23	8	11	10	2,4	5,4	2,1		
27	6П3	6П3	6,3	0,9	250	7,8	250	7	-14	6,1	130	21	2,5	20,5	6,5	7,0	4,0	8	9		
28	6Р5	6С4Б	6,3	0,3	250	1	-	-	-	2	1,6	100	63	-	0,4	0,06	2,2	2,8	3,2	23	
29	6В6	6П2	6,3	0,7	250	34	250	7	-16,5	2,5	200	80	7	10	3,2	8	0,5	6,5	9		
30	6А7	6А7Б	6,3	0,45	250	4,5	250	4,5	-12,5	4,1	250	52	5	12	4,5	9,5	0,7	7,5	9		
31	6С17	6Ж17Б	6,3	0,3	250	3,5	100	8,5	0	0,45	-	1000	-	1	-	9,5	5,0	12	15		
32	6С17	6Ж17Б	6,3	0,3	250	3,0	100	0,8	-3	1,65	2300	1500	-	2,5	-	6,0	0,005	7,0	13		
33	6С17	6Н9	6,3	0,3	250	10,8	150	4,1	-1	4,9	4400	900	-	3	-	8,5	0,003	7,0	12		
34	6С17	6Н9	6,3	0,3	250	9,3	-	-	-	2,8	1,6	70	4,4	-	1	-	3,2	2,8	3,5	10	
35	6С17	6Н9	6,3	0,6	250	9,3	-	-	-	8	2,6	20	7,7	-	2,5	-	3,4	4,0	1,0	10	
36	6С17	6К17Б	6,3	0,3	250	9,2	100	2,4	-3	2,0	1600	800	-	2,5	-	6	0,003	7	13		
37	6С17	6Р17Б	6,3	0,3	250	0,9	-	-	-	2	1,1	100	90	-	2,5	-	3,2	1,6	3,0	14	
38	6С17	6Р15	6,3	0,3	250	9,5	-	-	-	9	1,9	16	8,5	-	2,5	0,3	3,6	2,4	2,0	14	
39	6С17	6Н10	6,3	0,3	250	20	-	-	-	2	1,4	10	5,0	-	2,5	-	2,2	2,0	3,0	12	
40	6С17	6К12Б	6,3	0,3	250	11,8	12,5	4,4	-1	4,7	4200	900	-	3	-	8,5	0,003	7,0	16		
41	6С17	6Х6	6,3	0,3	125	4,8	-	-	-	1	1,6	100	63	-	-	-	0,02	-	-	19	
42	6С17	6А10	6,3	0,3	250	2,4	100	7,1	3,0	0,35	-	1000	-	1	-	7,5	0,005	11,0	15		
43	6С17	6А5Б	6,3	0,3	250	2,4	100	6,5	3	0,38	700	800	-	1,75	-	7,5	0,001	11,0	22		
44	6С-111	6ДП1	6,3	1,8	44	200	200	4,4	-	-	-	-	-	5	-	-	-	-	-	2,8	
45	6С17	6Ж8	6,3	0,5	250	10	100	2,5	-2,4	7,5	15000	2000	-	2,5	-	3,3	0,03	6,25	8		
46	6К6	6П7	6,3	0,4	250	33	250	5,5	-8	2,3	160	70	-	8,5	3,4	-	-	-	-	9	
47	6С6-6	6П4	6,3	0,3	180	15	180	2,5	-9	8,2	-	175	-	8,75	1,1	5,5	9,5	7,0	9		
48	6А4-6	6С6	6,3	1,0	250	60	-	-	-	4,5	3,3	4,2	0,8	2,5	1,5	3,5	7,5	1,6	5,5	2	
49	6Ф7	6С177	6,3	0,3	100	3,5	-	-	-	3	0,45	8	18	-	-	-	2,6	2,0	3,0	7	
50			пентод -	2,50	6,5	100	1,5	-3	1,1	900	150	-	-	-	-	-	3,2	0,008	12,0		
51	2С40		Триод УКВ маячковый	6,3	0,75	250	16,5	-	-	4,8	35	7,5	-	6,5	0,025	-	-	-	-	-	
52	2С43		Триод УКВ маячковый	6,3	0,9	300	2,6	-	-	9,0	4,5	5	-	-	-	-	-	-	-	-	
53	12А6	12П6	Лучевой тетрод	12,6	0,15	250	3,0	250	3,5	-12,5	3	-	-	7,5	3,4	9	0,3	9	9		
54	12А7-С1	12Н1	Двойной триод	12,6	0,15	180	7,6	-	-	4,5	1,9	1,6	8,4	-	1,5	-	9	9	9	11	
55	12А7-С1	12Ж1Л	Пентод универсальный	12,6	0,15	250	9,0	-	-	2,8	1,3	20	7,1	-	2,0	-	3,4	3,4	3,6	3	
56	12С5-С1	12С2	Триод	12,6	0,15	250	9,0	-	-	2	1,3	20	7,1	-	2,5	-	3,4	3,4	3,6	3	
57	12С5-С1	12Н40	Двойной триод	12,6	0,15	250	2,0	-	-	2	1,3	20	7,1	-	2,5	-	3,4	3,4	3,6	3	
58	12С5-С1	12К12Б	Пентод В4 Варимю	12,6	0,15	250	9,2	150	3,4	-2,5	4,0	-	3,0	-	0,5	0,005	7,0	12			
59	12С5-С1	12К17Б	Пентод В4	12,6	0,15	250	9,2	100	0,8	-3	1,65	2300	1500	-	2,5	-	6,0	0,005	7,0	13	
60	12С5-С1	12К17Б	Пентод В4 Варимю	12,6	0,15	250	3,0	100	2,6	-3	2,0	1600	800	-	4,0	-	6,0	0,003	7,0	13	
61	12С5-С1	12Р17Б	Двойной диод-триод	12,6	0,15	250	9,2	100	2,6	-3	2,0	1600	800	-	4,0	-	6,0	0,003	7,0	13	
62	12С5-С1	12Р17Б	Двойной диод-триод	12,6	0,15	250	9,2	100	2,6	-3	2,0	1600	800	-	4,0	-	6,0	0,003	7,0	13	
63	12С5-С1	12Р17Б	Триод	12,6	0,15	250	9,5	-	-	2	1,1	100	91	-	-	-	3,2	1,6	3,0	14	
64	12С5-С1	12Р17Б	Триод генераторный ДЦВ	12,6	0,1	300															

ТАБЛИЦА ПРИЕМНОУСИЛИТЕЛЬНЫХ РАДИОЛАМП

№ п/п	Обозначение		Тип лампы	Накал		Анод		Экр. сетка		Смещение	Крутизна	Код	Внутр. сопр.	Сопр. напр.	Мощность	Вых. мощ.	Емкости			Примечания		
	старое	новое		U _г	I _г	U _а	I _а	U _с	I _с								U _с	I _с	U _с		I _с	U _с
1	954	6ЖКЖ	Пентод УВЧ (желез)	6,3	0,15	250	2	100	0,7	-3	14	1700	1200	-	12	-	3,4	4007	3	29		
2	955	6СЖЖ	Триод УВЧ (желез)	6,3	0,15	180	4,3	-	-	-5	2,5	23	123	20	1,5	0,15	1,0	4,4	4007	3	30	
3	958	6ЖКЖ	Пентод УВЧ Варимю (желез)	6,3	0,15	250	6,7	100	2,7	-3	5	1230	700	-	1,8	-	3,4	4007	3	29		
4	9002	6СЖП	Триод миниатюрный	6,3	0,15	90	2,5	-	-	-2,5	1,7	2,5	174	-	1,6	-	1,2	1,1	1,4	6		
5	9003	6К19П	Пентод Варимю миниат.	6,3	0,15	250	6,7	100	2,7	-3	1,8	1400	700	-	1,7	-	3,4	4007	3	4		
6	9004	6ДЖЖ	Диод УВЧ (желез)	6,3	0,15	117	5	-	-	-	-	-	-	-	-	-	-	-	1,3	1		
7		1А1П	Пентод-преобразователь	1,2	0,06	90	0,8	45	1,9	0	0,25	-	800	-	-	-	-	-	-	-		
8		1В1П	Диод-пентод низкой частоты	1,2	0,06	90	-	3мА	0	0	-	50м	-	1000	-	-	-	-	-	-		
9		1К1П	Пентод ВЧ Варимю	1,2	0,06	90	1,8	45	0,65	0	0,75	-	800	-	-	-	-	-	-	91		
10		2П1П	Оконечный пентод	1,2	0,12	90	3,5	90	2,1	-4,5	2,5	270	100	10	-	0,27	-	-	-	-		
11	0А8	6А8Б	Пентод-преобразователь	6,3	0,3	230	3	100	2,7	-3	0,51	100	360	-	1	-	1,5	4006	12,5	26		
12	0А8В	6К15Б	Пентод УКВ Варимю	6,3	0,45	300	12,5	200	3,2	-3	5,0	3500	700	-	3	-	8,0	4005	5,0	13		
13	0А8С	6Ж14Б	Пентод УКВ	6,3	0,45	300	10	150	2,5	-2	9	9000	1000	-	3	-	11	4008	5	13		
14	0А8С	6Ж15	Пентод УКВ миниатюрный	6,3	0,3	230	7	150	2	-8	5	4000	800	-	2	-	6,5	4005	1,8	4		
15	0А8С	6Ж15	Телевизионный видео-пентод	6,3	0,65	300	30	150	7	-3	11	1430	130	-	9	3,0	1,3	4005	2,5	12		
16	0А8	6Б8Б	Двойной диод пентод	6,3	0,3	250	8,0	125	2,3	-3	11	730	650	-	2,5	-	6	4005	2	26		
17	0СЭМ	6С5	Триод	6,3	0,3	250	8,0	-	-	-8	2,0	2,0	10	10	2,5	0,25	3	2,0	11	3		
18	0Г7	6Р7Б	Двойной диод-триод	6,3	0,3	250	11	-	-	-3	1,2	70	58	-	2	-	5	1,5	4,5	24		
19	0Е5	6Е5	Электронный индикатор	6,3	0,3	250	0,1-5	-	-	-8(0)	0,8	2,0	2,5	1000	-	-	-	-	-	-	23	
20	0Е18	6С2Б	Триод	6,3	0,3	250	9	-	-	-8	2,6	2,0	7,7	-	2,5	-	4,2	3,8	5	3		
21	0Е18	6Н1П	Двойной триод миниатюр	6,3	0,45	150	3,0	-	-	-10	5,3	3,8	7,1	-	1,5	-	2,2	1,6	0,6	5		
22	0Е17	6Ж7Б	Пентод ВЧ	6,3	0,3	250	2	100	0,5	-3	1,2	1400	12	-	0,75	-	7	5,0	12	8		
23	0Е17	6К7Б	Пентод ВЧ Варимю	6,3	0,3	250	2	100	1,7	-3	1,45	1200	800	-	2,25	0,2	7	4,0	12	8		
24	0КВ	6Д1	Триод-вакуум	6,3	0,3	230	2,5	-	-	-3	0,3	-	500	-	0,8	-	6	0,03	5	27		
25	0КВМ	6К0	Пентод ВЧ Варимю	6,3	0,3	250	9	100	2,6	-3	2,0	1600	800	-	3	-	8	4,0	11	8		
26	0Н7С	6Н7	Двойной триод класса В	6,3	0,8	300	35	-	-	0,1	3,2	35	23	-	11	10	4,3	2,4	5,1	21		
27	0П3	6П3	Лучевой тетрод	6,3	0,9	250	7,8	250	7	-14	6,1	130	21	2,5	20,5	6,5	7,0	4,0	6	9		
28	0П3	6С4Б	Триод	6,3	0,3	250	1	-	-	-2	1,6	100	63	-	0,4	0,06	2,2	2,8	3,2	23		
29	0П6	6П2	Оконечный пентод	6,3	0,7	250	34	230	7	-16,5	2,5	200	80	7	10	3,2	8	0,5	6,5	9		
30	0П6	6П2	Лучевой тетрод	6,3	0,45	240	4,5	250	4,5	-12,5	4,1	250	52	5	12	4,5	3,5	0,7	7,5	9		
31	0С3А	6А18Б	Пентод-преобразователь	6,3	0,3	230	3,5	100	8,5	0	0,4	-	1000	-	1	-	9,5	4,0	12	15		
32	0С3А	6Ж17Б	Пентод ВЧ	6,3	0,3	250	3,0	100	0,8	-3	1,65	2500	1500	-	2,5	-	6,0	0,05	7,0	13		
33	0СН7	6Ж14Б	Пентод ВЧ	6,3	0,3	250	10,8	150	4,1	-1	4,9	4400	900	-	3	-	8,5	0,03	7,0	12		
34	0СН7	6Н8	Двойной триод	6,3	0,3	250	23	-	-	-2	1,6	70	44	-	1	-	3,2	2,8	3,5	10		
35	0СН7	6Н8	Двойной триод	6,3	0,6	250	9	-	-	-8	2,6	2,0	7,7	-	2,5	-	3,4	4	1,0	10		
36	0СЖ7	6К7Б	Пентод ВЧ Варимю	6,3	0,3	250	9,2	100	2,4	-3	2,0	1600	800	-	4	-	6	0,04	7	13		
37	0СЖ7	6Р7Б	Двойной диод-триод	6,3	0,3	250	0,9	-	-	-2	1,1	100	90	-	2,5	-	3,2	1,6	3,0	14		
38	0СЖ7	6Р7Б	Двойной диод-триод	6,3	0,3	250	9,5	-	-	-9	1,9	1,6	8,5	-	2,5	0,3	3,6	2,4	2,8	14		
39	0СЖ7	6Н10	Двойной триод	6,3	0,3	250	20	-	-	-9	1,9	1,6	8,5	-	2,5	0,3	3,6	2,4	2,8	14		
40	0СЖ7	6К12В	Пентод ВЧ Варимю	6,3	0,3	250	11,8	12,5	4,4	-1	4,7	4200	900	-	3	-	2,2	2,0	3,0	16		
41	0СЖМ	6Х6	Двойной диод	6,3	0,3	125	4	-	-	-1	4,7	4200	900	-	3	-	8,5	0,003	7,0	12		
42	0СА7СГ	6А10	Пентодриод с самовозбуждением	6,3	0,5	250	24	100	7,1	-3,0	0,35	-	1000	-	1	-	7,5	0,004	11,0	15		
43	0Л7	6А3Б	Пентод-смеситель	6,3	0,3	230	2,4	100	6,5	3	0,38	700	800	-	1,75	-	7,5	0,001	11,0	22		
44	0С3-НП	6ДП1	Генератор тока телевизон	6,3	1,8	44	-	-	-	200	4,4	-	-	-	5	-	5	-	-	-	28	
45	0С3-НП	6ЖВ	Пентод маловаримюный УВЧ	6,3	0,5	230	10	100	3,5	-2,4	7,5	1500	2000	-	2,5	-	9,5	0,03	6,2	8		
46	0С6-В	6П4	Оконечный пентод	6,3	0,4	250	3,5	250	5,5	-8	2,3	160	70	-	8,5	3,4	-	-	-	9		
47	0С6-В	6С6	Оконечный триод	6,3	0,3	180	15	180	2,5	-9	2,3	-	175	-	8,75	11	5,5	0,5	7,0	9		
48	0С6-В	6С6	Оконечный триод	6,3	1,0	250	6,0	-	-	-4,5	5,3	4,2	0,8	2,5	1,5	3,5	7,5	1,6	5,5	2		
49	0С6-В	6С177	Триод-пентод	6,3	0,3	100	3,5	-	-	-3	0,45	8	18	-	-	-	2,5	2,0	3,0	7		
50			пентод	6,3	0,5	100	1,5	-	-	-3	1,1	800	850	-	-	-	3,2	2,0	3,0	7		
51	2С40		Триод УКВ маячковый	6,3	0,75	250	16,5	-	-	-	4,8	35	7,5	-	6,5	0,035	-	-	-	1,0		
52	2С43		Триод УКВ маячковый	6,3	0,9	300	2,6	-	-	-	8,0	4,5	5	-	-	-	-	-	-	2		
53	12А6	12П6	Лучевой тетрод	12,6	0,15	250	3,0	250	3,5	-12,5	3	-	70	-	7,5	3,4	9	0,3	9	9		
54	0АН7-СТ	12Н1	Двойной триод	12,6	0,15	180	7,6	-	-	-	1,9	16	0,4	-	1,5	-	9	9	8	11		
55	0АН7-СТ	12Ж1	Пентод универсальный	12,6	0,075	210	2,0	7,5	0,55	-2,3	1,5	2000	1400	-	2,0	-	-	-	-	18		
56	12С5-СТ	12С2	Триод	12,6	0,15	250	9,0	-	-	-8	2,6	20	7,7	-	2,5	-	3,4	3,4	3,6	3		
57	12С5-СТ	12Н10	Двойной триод	12,6	0,15	250	9,0	-	-	-2	1,3	70	5,3	-	-	-	2,2	2,0	3,0	16		
58	12С5-СТ	12К12Б	Пентод ВЧ Варимю	12,6	0,15	250	9,2	150	3,4	-2,5	4,0	-	3000	-	3,0	-	6,5	0,005	7,0	12		
59	12С5-СТ	12Ж17В	Пентод ВЧ	12,6	0,15	250	9,2	100	0,8	-3	1,65	2300	1500	-	2,5	-	6,0	0,005	7,0	13		
60	12С5-СТ	12К17В	Пентод ВЧ Варимю	12,6	0,15	250	9,2	100	2,6	-3	2,0	1600	800	-	4,0	-	6,0	0,003	7,0	13		
61	12С5-СТ	12Р17В	Двойной диод-триод	12,6	0,15	250	0,9	-	-	-2	1,1	100	91	-	-	-	3,2	1,6	3,0	14		
62	12С5-СТ	12Р15	Двойной диод-триод	12,6																		

ТАБЛИЦА ПРИЕМНОУСИЛИТЕЛЬНЫХ РАДИОЛАМП

№ п/п	Обозначение		Тип лампы	Накал		Анод		Экр. сетка		См. - Е _г	Кру. - S	Коз. - R _к	Внут. сопр.	Сопр. напр.	Мощн. вх.	Вых. мощн.	Емкости			Примечания	
	старое	новое		U _г	I _г	U _а	I _а	U _с	I _с								C _г	C _а	C _с		
1	954	6К1Ж	Пентод УВ4 (жолуб)	6,3	0,15	250	2	100	0,7	-3	1,4	1700	1200	-	12	-	3,4	4007	5	29	
2	955	6С1Ж	Триод УВ4 (жолуб)	6,3	0,15	180	4,3	-	-	-3	2,0	2,5	12,3	20	1,5	0,75	1,0	1,4	0,6	3,0	
3	958	6К1Ж	Пентод УВ4 Бариню (жолуб)	6,3	0,15	250	6,7	100	2,7	-3	5	7250	700	-	12	-	3,4	4007	5	29	
4	9002	6С1П	Триод миниатюрный	6,3	0,18	90	2,5	-	-	-2,5	1,7	2,5	174	-	1,6	-	1,2	1,1	1,4	6	
5	9003	6К19П	Пентод Бариню миниат.	6,3	0,15	250	6,7	100	2,7	-3	1,8	1400	700	-	1,7	-	3,4	0,01	3	4	
6	9004	6Д1Ж	Диод УВ4 (жолуб)	6,3	0,15	117	5,8	-	-	-	-	-	-	-	-	-	-	1,3	-	7	
7		1Б1П	Гелтод-преобразователь	1,2	0,06	90	0,8	45	1,9	0	0,25	-	800	-	-	-	-	-	-	-	
8		1Б1П	Диод-пентод низкой частоты	1,2	0,06	90	-	-	-	0	0	50 ^м	-	1000	-	-	-	-	-	-	
9		1К1П	Пентод В4 Бариню	1,2	0,06	90	1,8	45	0,65	0	0,75	-	800	-	-	-	-	-	-		
10		2П1П	Оконечный пентод	1,2	0,12	90	2,5	90	2,1	-4,5	2,5	270	100	10	-	0,27	-	-	-	91	
11	6А8	6А8Б	Гелтод-преобразователь	6,3	0,3	250	3	100	2,7	-3	0,51	100	360	-	1	-	1,5	4006	12,5	26	
12	6А8	6К125Б	Пентод УКВ Бариню	6,3	0,45	300	12,5	200	3,2	-3	3,0	3500	700	-	3	-	8,0	0,015	5,0	13	
13	6А8	6К14Б	Пентод укв	6,3	0,45	300	10	150	2,5	-2	9	9000	1000	-	3	-	11	4005	5	13	
14	6А8	6АЖ5	Пентод укв миниатюрный	6,3	0,3	250	7	150	2	-8	5	4000	800	-	2	-	6,5	0,025	1,8	4	
15	6А8	6Ж45	Телевизионный видео-пентод	6,3	0,65	300	30	150	7	-3	11	1430	130	-	9	3,0	13	0,06	7,5	12	
16	6В8	6В8В	Двойной диод пентод	6,3	0,3	250	3,0	125	2,3	-3	1,1	730	650	-	2,5	-	6	0,005	9	2,6	
17	6С3М	6С5	Триод	6,3	0,3	250	8,0	-	-	-8	2,0	20	10	10	2,5	0,25	3	2,0	11	3	
18	6Г7	6Р7Б	Двойной диод-триод	6,3	0,3	250	1,1	-	-	-3	1,2	70	58	-	2	-	8	1,5	4,5	24	
19	6Е5	6Е5	Электронный индикатор	6,3	0,3	250	0,1-5	-	-	-8(0)	0,8	20	25	1000	-	-	-	-	-	2,9	
20	6Д6	6С2Б	Триод	6,3	0,3	250	9	-	-	-8	2,6	20	77	-	2,5	-	4,2	3,8	5	3	
21	6Д6	6Н1П	Двойной триод миниатюр	6,3	0,45	150	3,0	-	-	-10	5,3	38	71	-	1,5 ^м	-	8,2	1,6	0,6	5	
22	6Д6	6Ж7Б	Пентод В4	6,3	0,3	250	2	100	0,5	-3	1,2	1400	10	-	0,75	-	7	5005	12	8	
23	6К7	6К7Б	Пентод В4 Бариню	6,3	0,3	250	7	100	1,7	-3	1,45	1200	800	-	2,25	0,2	7	4005	12	8	
24	6К8	6Д1	Триод-вексод	6,3	0,3	250	2,5	100	6,0	-3	0,3 ^м	-	500	-	3	-	6	0,03	5	27	
25	6К9М	6К9	Пентод В4 Бариню	6,3	0,3	250	9	100	2,6	-3	2,0	1600	800	-	3	-	9,5	50,8	1,2	15	
26	6Н7С	6Н7	Двойной триод класса В	6,3	0,8	300	3,5 ^м	-	-	0,4	3,2 ^м	35 ^м	23 ^м	8 ^м	1,4 ^м	10 ^м	4,3	2,4	1,5	4	
27	6П3	6П3	Лучевой тетрод	6,3	0,9	250	7,8	250	7	-14	6,1	130	21	2,5	20,5	6,5	10	4,0	8	9	
28	6П5	6С4Б	Триод	6,3	0,3	250	1	-	-	-2	1,6	100	63	-	0,4	0,06	2,2	2,6	3,2	23	
29	606С	6П6	Оконечный пентод	6,3	0,7	250	3,4	250	7	-16,5	5,5	200	80	7	10	3,2	8	0,5	0,5	9	
30	6У6	6П2	Лучевой тетрод	6,3	0,45	250	4,5	250	4,5	-12,5	4,1	250	52	5	12	4,5	9,5	0,7	7,5	9	
31	63А7	6А10Б	Гелтод-преобразователь	6,3	0,3	250	3,5	100	8,5	0	0,45	-	1000	-	1	-	9,5	50,8	1,2	15	
32	6517	6Ж7Б	Пентод В4	6,3	0,3	250	3,0	100	0,8	-3	1,65	2500	1500	-	2,5	-	6,0	0,005	7,0	13	
33	65М7	6К116	Пентод В4	6,3	0,3	250	10,8	100	4,1	-1	4,9	4400	900	-	3	-	8,5	0,003	7,0	12	
34	65Л7	6Н9	Двойной триод	6,3	0,3	250	3 ^м	-	-	-2,4	1,6	70	44 ^м	-	1	-	3,2	2,8	3,5	10	
35	63W7	6Н8	Двойной триод	6,3	0,6	250	9 ^м	-	-	-8 ^м	2,6	20 ^м	7,7 ^м	-	2,5	-	3 ^м	4 ^м	1,0 ^м	10	
36	63К7	6К17Б	Пентод В4 Бариню	6,3	0,3	250	9,2	100	2,4	-3	2,0	1600	800	-	4	-	6	0,003	7	13	
37	6307	6Р7Б	Двойной диод триод	6,3	0,3	250	0,9	-	-	-2	1,1	100	90	-	2,5	-	3,2	1,6	3,0	14	
38	63Р7	6Р7Б	Двойной диод триод	6,3	0,3	250	0,5	-	-	-9	1,9	16	8,5	-	2,5	0,3	3,6	2,4	2,8	14	
39	63С7	6Н10	Двойной триод	6,3	0,3	250	2,0 ^м	-	-	-2	1,4	70	50	-	2,2	-	2,0	3,0	16		
40	63Ф7	6К12Б	Пентод В4 Бариню	6,3	0,3	250	11,8	12,5	4,4	-1	4,7	4800	900	-	3	-	8,5	0,003	7,0	12	
41	6У6М	6Х6	Двойной диод	6,3	0,3	125	4 ^м	-	-	-	-	-	-	-	-	-	-	0,02	-	19	
42	63А7С	6А10	Пентод с самовозбуждением	6,3	0,3	250	2,4	100	7,1	-3,0	0,35	-	1000	-	1	-	7,5	0,005	11,0	15	
43	6Л7	6А5Б	Гелтод-смеситель	6,3	0,3	250	2,4	100	6,5	-3	0,38	700	800	-	1,75	-	7,5	0,001	13,0	22	
44	6У7-М	6Д17	Генератор тока телевизон	6,3	1,8	44	-	-	-	200 ^м	+44	-	-	-	-	-	-	-	-	2,8	
45	7620	6Ж8	Пентод малобаритный УВ4	6,3	0,5	250	10	100	2,5	-2,4	7,5	1500	2000	-	2,5	-	9,5	0,03	6,25	8	
46	6К6	6П1	Оконечный пентод	6,3	0,4	250	3,3	250	5,5	-6,2	2,3	160	70	-	8,5	3,4	-	-	9		
47	6С6-С	6П4	Оконечный пентод	6,3	0,3	180	15	180	2,5	-9	2,3	-	175	-	8,75	1,1	5,5	9,5	7,0	9	
48	6В4-С	6С6	Оконечный триод	6,3	1,0	250	6,0	-	-	-4,5	5,3	42	0,8	2,5	1,5	3,5	7,5	1,6	5,5	2	
49	6Ф7	6С177	Триод-пентод	6,3	0,3	100	3,5	-	-	-3	0,45	8	18	-	2,5	-	2,0	3,0	7		
50			Пентод - 250	6,3	0,3	250	6,5	100	1,5	-3	1,1	800	850	-	3,2	-	0,002	12,0			
51	2С40		Триод УКВ маячковый	6,3	0,75	250	16,5	-	-	-4,8	3,5	7,5	-	-	6,5	0,035	-	-	-	2	
52	2С43		Триод УКВ маячковый	6,3	0,9	300	2,6	-	-	-	3,0	4,5	5	-	-	-	-	-	-		
53	12А6	12П6	Лучевой тетрод	12,6	0,15	250	3,0	250	3,5	-12,5	3	-	70	-	7,5	3,4	9	0,3	9	9	
54	12А7-С	12Н1	Двойной триод	12,6	0,15	180	7,6	-	-	-6,5	1,9	16	8,4	-	1,5	-	3	3	8	11	
55	12А7-М	12Ж11	Пентод универсальный	12,6	0,15	180	7,6	-	-	-6,5	1,9	16	8,4	-	1,5	-	3	3	8	11	
56	12С5-С	12С2	Триод	12,6	0,075	210	2,0	7,5	0,55	-2,3	1,5	2000	1400	-	2,0	-	-	-	-	18	
57	12С7	12Н10	Двойной триод	12,6	0,15	250	3,0	-	-	-8	2,6	20	7,7	-	2,5	-	3,4	3,4	3,6	3	
58	12С7	12К12Б	Пентод В4 Бариню	12,6	0,15	250	2,0	-	-	-2	1,3	70	5,3	-	2,0	-	3,2	2,0	3,0	16	
59	12С7	12Ж17Б	Пентод В4	12,6	0,15	250	3,2	150	3,4	-2,5	4,0	-	3000	-	3,0	-	6,0	0,003	7,0	12	
60	12С7	12К17Б	Пентод В4 Бариню	12,6	0,15	250	3,0	100	0,8	-3	1,65	2500	1500	-	2,5	-	6,0	0,003	7,0	13	
61	12С7	12Р17Б	Двойной диод-триод	12,6	0,15	250	0,9	-	-	-2	1,1	100	91	-	4,0	-	6,0	0,003	7,0	13	
62	12С7	12Р17Б	Двойной диод-триод	12,6	0,15	250	0,9														

ТАБЛИЦА ПРИЕМНОУСИЛИТЕЛЬНЫХ РАДИОЛАМП

№ п/п	Обозначение		Тип лампы	Накал		Анод		Экр. сетки		Смещение	Крутизна	Кос. ушле.	Внутр. сопр.	Сопр. напр.	Мощн. вых.	Вых. расщ.	Емкости			Примечания		
	старое	новое		U _н	I _н	U _а	I _а	U _с	I _с								E _с	S	Γ		R _с	R _в
				V	A	V	mA	V	mA	V	mA	кΩ	кΩ	Ω	Ω	пФ	пФ	пФ				
1	954	6К1Ж	Пентод УВ4 (жолуы)	6,3	0,15	250	2	100	0,7	-3	1,4	1700	1200	-	12	-	34	4007	5	29		
2	955	6С1Ж	Триод УВ4 (жолуы)	6,3	0,15	180	4,3	-	-	-3	2,0	2,5	12,3	20	1,5	0,15	10	1,5	0,6	30		
3	956	6К1К	Пентод УВ4 Варимю (жолуы)	6,3	0,15	250	6,7	100	2,7	-3	5	1250	700	-	12	-	34	4007	5	29		
4	9002	6С8П	Триод миниатюрный	6,3	0,15	90	2,5	-	-	-2,5	1,7	2,5	174	-	1,6	-	12	1,1	1,4	6		
5	9003	6К19П	Пентод Бармю миниат.	6,3	0,15	250	6,7	100	2,7	-3	1,8	1400	700	-	1,7	-	34	4007	5	4		
6	9004	6Д1Ж	Диод УВ4 (жолуы)	6,3	0,15	117	5,5	-	-	-	-	-	-	-	-	-	-	-	-	1		
7		6К19П	Пентод Бармю миниат.	1,2	0,06	90	0,8	45	1,9	0	0,25	-	800	-	-	-	-	-	-	-		
8		151П	Диод-преобразователь	1,2	0,06	90	0,8	45	1,9	0	0	150 ^m	-	1000	-	-	-	-	-	-		
9		1К1П	Пентод В4 Варимю	1,2	0,06	90	1,5	45	0,65	0	0,75	-	800	-	-	-	-	-	-	31		
10		2П1П	Оконечный пентод	1,2	0,12	90	9,5	90	2,1	-4,5	2,15	270	100	10	-	0,27	-	-	-	-		
11	6A8	6A8B	Пентод-преобразователь	6,3	0,3	250	3	100	2,7	-3	0,81	100	360	-	1	-	12,5	4006	12,5	2,6		
12	6AB7	6К156	Пентод УКВ Варимю	6,3	0,45	300	12,5	200	3,2	-3	3,0	3500	700	-	3	-	8,0	0,015	5,0	13		
13	6AC7	6К146	Пентод УКВ	6,3	0,45	300	10	150	2,5	-2	9	9000	1000	-	3	-	7,1	0,005	5	13		
14	6AC5	6АЖ5	Пентод УКВ миниатюрный	6,3	0,3	250	7	150	2	-8	5	4000	800	-	2	-	6,5	0,025	1,8	4		
15	6AG7	6Ж45	Телевизионный видео-пентод	6,3	0,65	300	30	150	7	-3	11	1430	130	-	9	3,0	13	0,06	7,5	12		
16	6B6	6B6B	Двойной диод	6,3	0,3	250	9,0	12,5	2,3	-3	1,1	730	650	-	2,5	-	6	0,005	9	2,6		
17	6С3М	6С5	Триод	6,3	0,3	250	8,0	-	-	-8	2,0	20	10	10	2,5	0,25	3	2,0	11	3		
18	6Г7	6Р7Б	Двойной диод-триод	6,3	0,3	250	1,1	-	-	-3	1,2	70	58	-	2	-	3	1,5	4,5	2		
19	6Е5	6Е5	Электронный индикатор	6,3	0,3	250	0,1-5	-	-	-8(0)	0,8	20	25	1000	-	-	-	-	-	-	2,9	
20	6Г5	6С2Б	Триод	6,3	0,3	250	9	-	-	-8	2,6	20	17	-	2,5	-	4,2	3,8	5	3		
21	6Г6	6Н1П	Двойной триод миниатюр	6,3	0,45	150	3,0	-	-	-10	5,3 ^m	38 ^m	71 ^m	-	1,5 ^m	-	2,2	1,6	0,4	5	Упаковка герметичная	
22	6Г7	6Ж7Б	Пентод В4	6,3	0,3	250	2	100	0,5	-3	1,2	1400	12	-	0,75	-	7	0,045	12	6		
23	6К7	6К7Б	Пентод В4 Варимю	6,3	0,3	250	7	100	1,7	-3	1,2	1200	800	-	2,25	0,2	7	0,045	12	6		
24	6К8	6Д1	Триод-вакуум	6,3	0,3	250	2,5	100	6,0	-3	3,3 ^m	-	300	-	0,8	-	6	0,03	5	2,7		
25	6К9М	6К9	Пентод В4 Варимю	6,3	0,3	250	9	100	2,6	-3	3,0	1600	800	-	1,9	-	4,8	0,005	11	8		
26	6Н7С	6Н7	Двойной триод класса В	6,3	0,8	300	3,5	-	-	0,1	3,2 ^m	35 ^m	23 ^m	8 ^m	1,9 ^m	10 ^m	4,1	2,4	5,4	21		
27	6П3	6П3	Лучевой тетрод	6,3	0,8	250	7,8	250	7	-14	6,9	130	21	2,5	20,5	6,5	10	4,7	8	9		
28	6П5	6С4Б	Триод	6,3	0,3	250	1	-	-	-2	1,6	130	63	-	0,4	0,06	2,2	2,8	3,2	2,3		
29	6P6C	6P6	Оконечный пентод	6,3	0,7	250	3,4	250	7	-16,5	2,5	200	80	7	10	3,2	8	0,5	6,5	9		
30	6V6	6P2	Лучевой тетрод	6,3	0,45	250	4,5	250	4,5	-12,5	4,1	250	52	5	12	4,5	19,5	9,7	7,5	9		
31	6X17	6A15B	Пентод-преобразователь	6,3	0,3	250	3,5	100	8,5	0	0,45	-	1000	-	1	-	9,5	0,08	1,2	15		
32	6ST7	6Ж7Б	Пентод В4	6,3	0,3	250	3,0	100	0,8	-3	1,65	2300	1500	-	2,5	-	6,0	0,005	7,0	13		
33	6SH7	6К116	Пентод В4	6,3	0,3	250	10,8	150	4,1	-1	4,9	4400	900	-	3	-	8,5	0,003	7,0	12		
34	6SL7	6Н9	Двойной триод	6,3	0,3	250	23 ^m	-	-	-2 ^m	1,6	70 ^m	44 ^m	-	1	-	3,2	2,8	3,5	10	Упаковка герметичная	
35	6SN7	6Н8	Двойной триод	6,3	0,6	250	9 ^m	-	-	-8 ^m	2,6	20 ^m	7,7 ^m	-	2,5	-	3 ^m	4 ^m	1,0 ^m	10	Упаковка герметичная	
36	6SK7	6К17Б	Пентод В4 Варимю	6,3	0,3	250	9,2	100	2,4	-3	2,0	1600	800	-	4	-	6	0,003	7	13		
37	6SQ7	6Р7Б	Двойной диод триод	6,3	0,3	250	0,9	-	-	-2	1,1	100	90	-	2,5	-	3,2	1,6	3,0	14		
38	6SR7	6Р15	Двойной диод триод	6,3	0,3	250	9,5	-	-	-9	1,9	16	8,5	-	2,5	0,3	3,6	2,4	2,0	14		
39	6SC7	6Н10	Двойной триод	6,3	0,3	250	2,0 ^m	-	-	-2	1,4	70	50	-	2,5	-	2,2	2,0	3,0	16	Упаковка герметичная	
40	6SC7	6К12Б	Пентод В4 Варимю	6,3	0,3	250	11,8	12,5	4,4	-1	4,7	4200	900	-	3	-	8,5	0,003	7,0	12		
41	6X6M	6X6	Двойной диод	6,3	0,3	125	4,4	-	-	-7	4,7	4200	900	-	3	-	8,5	0,003	7,0	12		
42	6SA7GT	6A10	Пентод триод с самовозбуждением	6,3	0,3	250	2,4	100	7,1	-3,0	0,35 ^m	-	1000	-	1	-	7,5	0,005	11,0	15	Упаковка герметичная	
43	6DL7	6A25B	Пентод-смеситель	6,3	0,3	250	2,4	100	6,5	-3	0,38 ^m	700	800	-	1,75	-	7,5	0,001	11,0	22	Упаковка герметичная	
44	6S-1111	6ДП1	Генератор тока телевизора	6,3	1,8	44	-	200 ^m	-	-	4,4	-	-	-	5	-	7,5	0,001	11,0	22	Упаковка герметичная	
45	6Z20	6ЖВ	Пентод малабаритный УВ4	6,3	0,5	250	10	100	7,5	-2,4	7,5	15000	2000	-	2,5	-	9,5	0,03	6,25	8		
46	6K6	6П1	Оконечный пентод	6,3	0,4	250	3,3	250	5,5	-8	2,3	160	70	-	8,5	3,4	-	-	-	9		
47	6SC6	6П4	Оконечный пентод	6,3	0,3	180	1,5	180	2,5	-9	2,3	-	17,5	-	8,5	1,1	5,5	9,5	7,0	9		
48	6B4-C	6С6	Оконечный триод	6,3	1,0	250	6,0	-	-	-4,5	5,3	42	0,8	2,5	1,5	3,5	7,5	1,6	5,5	2		
49	6 F 1	6С177	Триод-пентод	0,9	0,3	100	3,5	-	-	-3	0,45	8	18	-	-	-	2,6	2,0	3,0	7		
50			Пентод	2,50	6,5	100	1,5	-	-	-3	1,1	800	850	-	-	-	3,2	0,003	12,0	2		
51	2C40		Триод УКВ маячковый	6,3	0,75	250	16,5	-	-	-	4,8	3,5	7,5	-	6,5	0,035	-	-	-	-		
52	2C43		Триод УКВ маячковый	6,3	0,9	300	2,6	-	-	-	9,0	4,5	5	-	-	-	-	-	-	-		
53	12A6	12L6	Лучевой тетрод	12,6	0,15	250	3,0	250	3,5	-12,5	3	-	70	-	7,5	3,4	9	0,3	9	9		
54	12AU6	12H1	Двойной триод	12,6	0,15	250	7,6	-	-	-6,5	1,9	16	8,4	-	2,5	-	3	3	8	11		
55	12AR5	12X11	Пентод универсальный	12,6	0,15	180	7,6	-	-	-6,5	1,9	16	8,4	-	2,5	-	3	3	8	11		
56	12X5GT	12C2	Триод	12,6	0,15	250	9,0	-	-	-8	2,6	20	1,7	-	2,5	-	3,4	3,4	3,6	3		
57	12X67	12H10	Двойной триод	12,6	0,15	250	2,0	-	-	-2	1,3	70	5,3	-	2,5	-	3,4	3,4	3,6	3		
58	12X67	12K125	Пентод В4 Варимю	12,6	0,15	250	9,2	150	3,4	-2,5	4,0	-	1000	-	3,0	-	0,5	0,003	7,0	12		
59	12X77	12K17B	Пентод В4	12,6	0,15	250	3,2	100	4,8	-5	1,65	2500	1500	-	2,5	-	6,0	0,003	7,0	13		
60	12XK7	12K17B	Пентод В4 Варимю	12,6	0,15	250	9,2	100	2,6	-3	2,0	1600	800	-	4,0	-	6,0	0,003	7,0	13		
61	12SA7	12P15	Двойной диод-триод	12,6	0,15	250	9,9	-	-	-2	1,1	100	91	-	2,5	-	3,2	1,6	3,0	14		
62	12SR7	12P15	Двойной диод-триод	12,6	0,15	250	9,9	-	-	-9	1,9	1,6	8,5	-	2,5	0,3	3,6	2,4	2,8	14		
63	1D-1		Триод генераторный ДЦВ	12,6	0,1	300	-	-	-	-	3	1,7	-	-	5	-	3,6	2,4	2,8	14		
64	1D-12		Триод генераторный ДЦВ	12,6	0,8	800	-	-	-	-	3	1,7	-	-	5	-	3,6	2,4	2,8	14		
65	8P9		Двойной пентод генераторный	12,6	0,7	500	24 ^m	200	32 ^m	-4,5	-	-	-	-	40	8,5 ^m	10	0,04	2,6	-	Упаковка не в вакууме	
66	8P2		Двойной пентод генераторный	12,6	1,4	500	72 ^m	200	14 ^m	-6,5	-	-	-	-	15	2,6 ^m	-	-	-	-	Упаковка не в вакууме	
67	F-471	КХ1	Пентод генераторный	10	0,6	400	9,5	250	8	-30	5,3	2,0	170	-	20	20	0,5	0,3	7,8	-	Упаковка не в вакууме	
68	807	КХ2	Тетрод лучевой	6,3	0,9	600	60-200	300	5-10	-30	6	-	-	-	80	11	0,2	7	-	-	Упаковка не в вакууме	
69	16Z5	КХ3	Пентод лучевой	12,6	0,45																	