

~~CONFIDENTIAL~~

TSSG/ESD/TEB-08-70
8 May 1970

MEMORANDUM FOR: Chief, Research & Engineering Division, TSSG
THROUGH : Chief, TEB/ESD *MC*
Chief, ESD/TSSG
SUBJECT : Memorandum Test Report on N.B.S. Measured Color
Properties of Light Tables and Through a
Microstereoscope

1. In late October 1969, ESD/TEB started an investigation to determine what equipments and methods were available for testing and evaluating the color quality and color rendering properties of fluorescent luminaires as used with viewing light tables. This investigation resulted in procurement of equipment and determining test procedures, both of which are now in use by TEB. The measuring system adopted was the CIE method, a widely used psychophysical system.

2. The above investigation led to discussions with [redacted] of the Photometry Section, Optical Physics Division, National Bureau of Standards. This division has been making color measurements in the past. To establish a better "feel" for color measurement and to provide base line data which we could compare our measuring techniques to, TEB asked N.B.S. to make selected color measurements of luminaires in two [redacted] Light Tables and through a microscope system. This data could also provide the center with a start point for specifying color by describing the color characteristics of existing equipments. On November 26, the following equipments along with a list of required measurements were delivered to N.B.S.

- 1) [redacted] Light Table Model MIM-47B100, [redacted]
- 2) [redacted] Light Table, Model MIM-455100, [redacted]
- 3) [redacted] Model Zoom 21 [redacted]
with a Rhomboid 2X attachment.

3. Although the spectroradiometric measurements were made and the equipment returned to NPIC in December, the data requested has been long in coming. An official report will be provided by N.B.S. at a later time. The measurement data which will be in the formal report has been obtained and is given in detail below.


Declass Review by
NIMA/DOD

~~CONFIDENTIAL~~

GROUP 1
Excluded from automatic
downgrading and
declassification

CONFIDENTIAL

Approved For Release 2003/08/05 : CIA-RDP78B05171A000300010018-7
Position of Sensor During Measurement

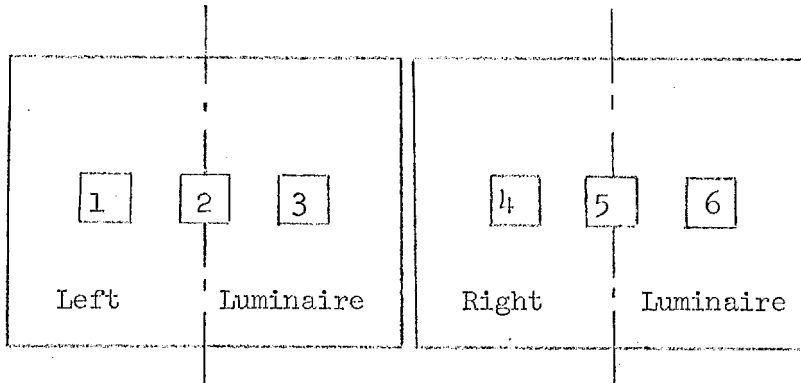

Light Table Serial No. 00037

Test Parameter	Position of Sensor					
	1	2	3	4	5	6
Correlated Color Temp. - Kelvins						
At maximum intensity	5600	5600	5450	5650	5650	5650
At 10% of maximum	5500	5450	5400	5500	5550	5550
Chromaticity Coordinates						
At maximum intensity						
x -	.330	.331	.334	.330	.329	.329
y -	.358	.359	.362	.357	.357	.357
At 10% of maximum						
x -	.333	.334	.336	.333	.331	.332
y -	.361	.362	.364	.362	.361	.360
Color Rendering Index						
At maximum intensity	73.4	73.8	73.3	73.6	73.7	73.2
At 10% of maximum	75.3	75.4	75.1	75.3	75.1	75.1

CONFIDENTIAL

Test Parameter	Position of Sensor						
	1	2	3	4	5	6	
Correlated Color Temp. - Kelvins							
At maximum intensity	5750	5700	5750	5650	5550	5550	
At 10% of maximum	5600	5450	5450	5650	5600	5400	
Chromaticity Coordinates							
At maximum intensity	x -	.326	.328	.326	.329	.331	.331
	y -	.364	.366	.365	.364	.367	.366
At 10% of maximum	x -	.330	.334	.334	.330	.330	.336
	y -	.364	.367	.369	.364	.365	.370
Color Rendering Index							
At maximum intensity	75.7	76.3	75.5	75.7	75.5	75.9	
At 10% of maximum	77.7	77.5	77.1	77.4	77.4	78.0	

Table 00195 Light Source When Viewed Thru Microscope
 and Rhomboid Optics

Test Parameter	Rhomboids Over Position 2	
	Left Eyepiece	Right Eyepiece
Correlated Color Temp. - Kelvins		
At maximum intensity		
- maximum magnification	4800	4800
- minimum magnification	4800	4800
Chromaticity Coordinates		
At maximum intensity		
	- maximum magnification	x - .363
	y - .443	.443
- minimum magnification	x - .364	.362
	y - .443	.443
Color Rendering Index		
At maximum intensity		
- maximum magnification	56.9	57.0
- minimum magnification	57.0	56.8

CONFIDENTIAL

Approved For Release 2003/08/05 : CIA-RDP78B05171A000300010018-7

4. On 24 April, TEB made color measurements on the luminaires in light table serial no. 00037. The data yields a relative comparison of the accuracy of TEB's measuring process at that time to data supplied by N.B.S. During the 4 month intervening period between these measurements, it is believed that the light sources received only short periods of use. TEB's measurements are listed below with percentage deviation from N.B.S. data. This assumes that the color quality of the luminaires did not change due to intervening use.

Light Table Serial No. 00037
(TEB Measurements)

Test Parameter	Sensor Position 2	Deviation from NBS Data	Sensor Position 5	Deviation from NBS Data
Correlated Color Temp. - Kelvins				
At maximum intensity	5550	- 0.9%	5600	- 0.9%
At 10% of maximum	5200	- 4.6%	5150	- 7.2%
Chromaticity Coordinates				
At maximum intensity				
x -	.331	0.0%	.331	+ 0.6%
y -	.357	- 0.6%	.357	0.0%
At 10% of maximum				
x -	.341	+ 2.1%	.343	+ 3.6%
y -	.363	+ 0.3%	.366	- 1.4%
Color Rendering Index				
At maximum intensity	69.1	- 6.4%	69.1	- 6.2%
At 10% of maximum	70.3	- 6.8%	70.9	- 5.6%



25X1

Test Engineer
TEB/ESD


CONFIDENTIAL

~~CONFIDENTIAL~~

Distribution:

- Orig. & 2 - NPIC/TSSG/ESD/TEB
- 1 - Addressee
- 1 - NPIC/TSSG/PPS (through Ch/TSSG)
- 1 - NPIC/TSSG/RED
- 1 - NPIC/TSSG/RED
- 1 - NPIC/TSSG/RED
- 1 - NPIC/TSSG/RED/
- 1 - NPIC/TSSG/RED/

25X1



NPIC/TSSG/ESD/TEB (8 May 1970)



25X1

~~CONFIDENTIAL~~

CENTER ROUTING SLIP

Approved For Release 2003/08/05 : CIA-RDP78B05171A000300010018-7
 FROM

TSSG/TEB/ESD

11 May 70

TO	INITIALS	DATE	REMARKS
DIRECTOR			
DEP/DIRECTOR			
EXEC/DIRECTOR			
SPECIAL ASST			
ASST TO DIR			
ASST TO DEP/DIR			
CH/PPBS			
DEP CH/PPBS			
EO/PPBS			
CH/IEG			
DEP CH/IEG			
EO/IEG			
CH/PSG			
DEP CH/PSG			
EO/PSG			
CH/DBD/PSG			
CH/TSSG			
DEP CH/TSSG			
EO/TSSG			
Ch/RED			
DIR/IAS/DDI			
CH/DIA/XX4			
CH/DIA/AP-1P			
CH/SPAD			

Approved For Release 2003/08/05 : CIA-RDP78B05171A000300010018-7