Riemannian fibre spaces... 25302 S/020/61/138/005/001/025 C111/C222

 $dl_{iab} = \omega_{ik}l_{kab} - \omega_{ac}l_{icb} - \omega_{bc}l_{iac} = \left[R_{ikab} - \frac{1}{2}(l_{iac}l_{kcb} - l_{ibc}l_{kca})\right]\omega_{k} + 2R_{icab}\omega_{c},$ $R_{iakj} = 0, \quad R_{iakb} = \frac{1}{2}R_{ikab} + \frac{1}{4}(l_{iac}l_{kcb} + l_{ibc}l_{kca}). \tag{2}$

Obviously it holds

 $\mathbf{D} \omega_{\mathbf{a}} = \left[\omega_{\mathbf{b}} \mathbf{e}_{\mathbf{b} \mathbf{a}} \right], \quad \mathbf{e}_{\mathbf{b} \mathbf{a}} = \omega_{\mathbf{b} \mathbf{a}} + \mathbf{1}_{\mathbf{i} \mathbf{b} \mathbf{a}} \omega_{\mathbf{i}}.$

Since $\theta_{ab} + \theta_{ba} = 0$, θ_{ab} are forms of the Riemannian connection in the space of the fibres V^n which is called the base. To every curve in the base V^n the corresponds a one-parametric family of fibres in V^{n+m} . Every fibre admits a motion group generated by all closed contours of the base going through the point above which the fibre is lying. The motion groups of different fibres are isomorphic. This abstract group appearing in every fibre as a motion group is called the holonomy group of the

Riemannian fibre space V^{n+m} . Let the holonomy group be one-parametric. It is stated that in the V^{n+m} there exists a "transversal fireing" in (n+1)-dimensional surfaces, where each of them intersects with the fibre in the trajectory of the holonomy group.

Card 2/4

Riemannian fibre spaces... 25302

S/020/61/138/005/001/025 C111/C222

Theorem 1: If V^{n+m} is a Riemannian fibre space with a one-parametric holonomy group then it holds:

1) In the base Vn there exists a skew-symmetric tensor cab satisfying the condition

 $\nabla c_{ab} = c_{abc} \omega_{o}, \quad c_{(abc)} = 0. \tag{4}$

2) In the space of the "transversal fibres" V^{n-1} there exists a vector b_{∞} , a skew-symmetric tensor $a_{\alpha,\beta}$, a scalar $\xi \neq 0$ which satisfy the conditions

 $\Delta_{\alpha} \psi = \alpha^{\alpha} \psi \lambda^{\alpha}, \quad p^{(\alpha b \lambda)} = 0,$ $\Delta_{\alpha} \psi = \alpha^{\alpha} \psi \lambda^{\alpha}, \quad p^{(\alpha b \lambda)} = 0,$ $\Delta_{\beta} \psi = \rho^{\alpha} \psi \lambda^{\alpha}, \quad p^{(\alpha b \lambda)} = 0,$ (2)

Theorem 2: Given 1) a Riemannian space V^n and within it a skew-symmetric tensor c_{ab} satisfying (4); 2) a Riemannian space V^{m-1} and within it a vector b_{CL} , a skew-symmetric tensor a_{occ} and a scalar $f \neq 0$ satisfying (5). Then there exists a unique (up to coordinate transformation) Riemannian fibre space V^{n+m} with a one-parametric Card 3/4

Riemannian fibre spaces ... 25302

S/020/61/138/005/001/025 C111/C222

holonomy group for which v^n is the base and v^{n-1} is the space of "transversal fibres".

There are 2 Soviet-bloc references.

ASSOCIATION: Moskovskiy gosudarstvennyy universitet im. M. V. Lomonosova (Moscow State University im. M. V. Lomonosov)

PRESENTED: February 13, 1961, by P.S. Aleksandrov, Academician

SUBMITTED: February 10, 1961

Card 4/4

KARTASHEY, A.P.

Stratified Riemann spaces with one-parameter holonomy groups. Dokl. AN SSSR 138 no.5:1002-1004 Je '61. (MIRA 14:6)

l. Moskovskiy gosudarstvennyy universitet im. M.V.Lomonosova. Predstavleno akademikom;P.S.Aleksandrovym. (Spaces, Generalized) (Groups, Theory of)

SOURCE CODE: UR/0293/66/004/004/0601/0618

AUTHOR: Bazhulin, P. A. (deceased); Kartashev, A. V.; Markov, M. N. ORG: none

TITLE: Study of the angular and spectral distribution terrestrial radiation in the infrared spectral range from the Kosmos-45 earth satellite SOURCE: Kosmicheskiye issledovaniya, v. 4, no. 4, 1966, 601-618
TOPIC TAGS: atmospheric radiation, IR spectrometer, spectrometry, scientific satellite, optic albedo / Kosmos-45 scientific satellite
ABSTRACT: Summary. A scanning infrared spectrometer system is described which has an angular resolution of 2×10^{-3} radians, covering the spectrum from 0.8 to 34μ with spectral resolution of better than 12μ . The characteristics and operation of the spectrometer and the associated data-recording equipment are given, together with the experimental data on infrared atmospheric radiation and the Earth's albedo collected during one orbit of the Kosmos-45 satellite.

P. A. Bazhulin and his associates describe a spectrometer intended for use in the study of the Earth's energy balance in the infrared region but which, through interpretation of the results, may also supply data on the molecular content and temperature of the atmosphere at various altitudes. The spectrometer is capable of measuring angular and spectral infrared radiation simultaneously; it was used for this purpose in October 1962 and June 1963, in vertically launched rockets which reached an altitude of 500 km [27].

Card 1/13

UDC: 551.521.2


As an extension of these studies, a spectrometer of the same type but with the addition of a recording system scanned seven regions of the Earth during one orbit of the Kosmos-45 satellite (launched on 13 September 1964). The atmosphere below the satellite was scanned in a direction perpendicular to the satellite's trajectory. Even though the experiment was of limited duration, a wide variety of conditions were encountered. Both illuminated and dark regions of the Earth were observed. Three of the seven regions covered were in the southern hemisphere, four were over ocean bodies, and one was above a spiral cloud formation near Japan. In general, the amount of cloud cover was different for each region.

The spectrometer employed in these studies comprises a scanning mirror and lens system, a filter arrangement, a bolometer, an amplifier, a recording system, and a programming unit (Figs. 1 and 2). The spectrometers launched in the rockets operated in conjunction with a telemetry system. In the satellite experiment, a magnetic oscillograph was used and the recorded film was recovered.

The spectrometer system operates as follows: A flat scanning mirror is rotated twice through π radians ($\pm \pi/2$ radians from the direction of the nadir) every 10-15 minutes, with a scanning speed of 2 x 10^{-2} rad/sec (determined by a hermetically scaled drive mechanism). The radiation


Card 2/13

• .	•		
reflector lens (effort on the bolometer periodically intersperse and control of the bolometer)	ratio of 1:10 and 1:30, pas fective diameter, 33 mm detector. The path betwo rupted by filters arranged	ectangular iris diaphragm sees through a Cassegrain ; focal length, 200 mm), a een the bolometer and the nonsymmetrically along t an arrangement produces	an nd falls lens is
•			
•			
•			
•	•	•	
		•	

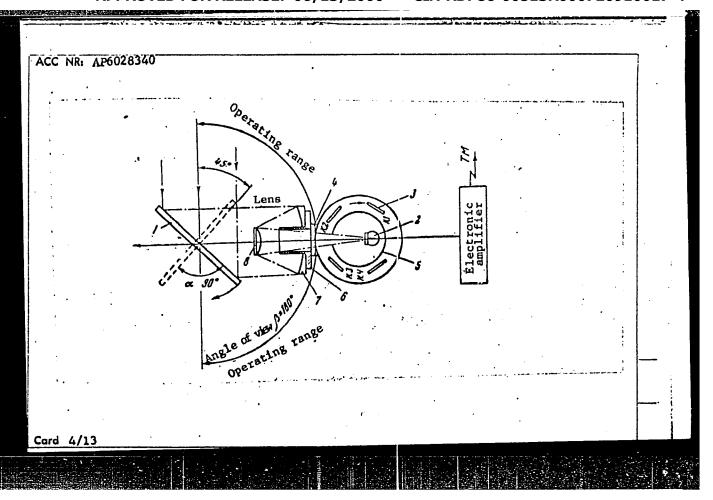

APPROVED FOR RELEASE: 06/13/2000 CIA-RDP86-00513R000720910017-4"

"APPROVED FOR RELEASE: 06/13/2000 CIA-RDP86-00513R000720910017-4

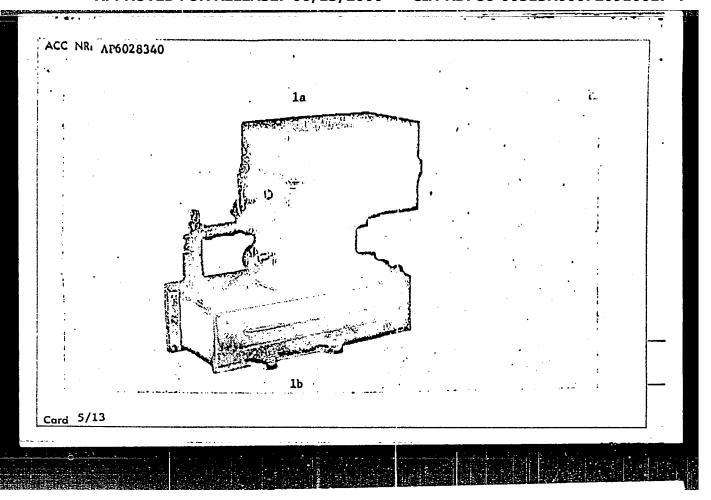

APPROVED FOR RELEASE: 06/13/2000 CIA-RDP86-00513R000720910017-4"

Fig. 1. Diagram and photograph of spectrometer

1 - Scanning mirror; 2 - bolometer; 3 - modulating filter; 4 - concentrating window; 5 - slotted diaphragm; 6 - internal tube; 7 - spherical mirror 1; 8 - spherical mirror 2.

The filters — thin crystal plates — separate out different infrared spectrum bands. Four filters were used: a quartz crystal 1 mm thick with bandpass between 4.5 and 38 μ ; a 0.7-mm lithium fluoride crystal (8.5 to 38 μ); a 0.7-mm fluorite crystal (12.5-38 μ), and a nontransparent metallic plate with bandpass between 0.8 and 38 μ . The bolometer has a sensing element made of a 0.3 x 9 mm calcium bromide crystal plate 1 mm thick which determines the upper cut-off wavelength. It has a time constant of 5-7 msec, a resistance of 1000 ohms, and a conversion factor of 40 v/w. At a modulating frequency of 30-40 cps, its detectivity is 1.5 x 10 9 (cps·cm) $^{1/2}$ /w.

The pulsed signals from the bolometer are amplified by a vacuum tube amplifier with two outputs. The permalloy-shielded amplifier has a voltage gain, passband, and sensitivity threshold of approximately 10⁶, 0.5-200 cps, and 10⁻⁹ v/cps, respectively. To keep the sensitivity constant, the detector-amplifier combination is periodically calibrated by means of light from an

Card 6/13

ACC NR. AP6028340

. incandescent lamp. Calibration is accomplished at instants when the scanning mirror is directed at the horizon. The power consumption of the bolometeramplifier combination is 0.5 w. The two outputs from the amplifier drive two magnetic oscillograph channels (see Fig. 2a) which record the infrared




Fig. 2. Magnetic oscillograph (a) and control unit (b)

radiation in two sensitivity ranges. The recording film transport speed is 25 mm/sec; the roll contains 100 m of film. The length of scanning is controlled by a special unit (see Fig. 2b) which stops both the scanning system and the recorder during the intervals between recording sessions. The measurement accuracy for total radiation is $\pm 1\%$, which corresponds to a change in effective temperature of the radiating object of only 0.8°K. However, the error in determining the radiation in narrow. sub-bands (+2 w) which were within the spectrum

under investigation was ~±6%. The total weight of the equipment is approximately 10 kg.

The experimental data obtained by the satellite were in the form of 10,000 high-quality spectroscopic samples. On the basis of these data, a

Card 7/13

table was prepared of the radiation flux corresponding to the radiation from 1 m² of the Earth's surface and the equivalent temperature corresponding to the black body temperature radiating the same flux. The readings from different spectra were subtracted to derive the following four narrow spectral bands especially tailored to trap different energies:

- 1) The 0.8-4.5-µ band, where half of the energy from the Sun is concentrated. The thermal radiation from the Earth is small, however (only a fraction of a percent of the total terrestrial radiation). When the upper layer of the atmosphere is scanned, hydroxyl radiation may be registered here.
- 2) The $4.5-8.5-\mu$ band, where, for a black body temperature of 250° K, 10% of total terrestial radiation is found. The absorption bands of H_2O , NO, N_2O , CH₄, and OH fall within this range.
- 3) The $8.5-12.5-\mu$ band (atmospheric window) covers the absorption band of water vapor and O₂ (10-15% of the total). In 75% of the cases, radiation from clouds is recorded in this band.
- 4) The 12.5-38 µ band overlaps the CO2 absorption band. Of the total

Card 8/13

radiation registered here, 80-90% is due to water vapor.

The data obtained are subdivided into two types according to angle of view. On the basis of data of the first type (angle of view less than 1-1.5 rad from the direction of the nadir), radiation due to the Earth and the atmosphere, including clouds, may be analyzed. Data of the second type (angle of view close to the horizontal) make it possible to analyze the free atmosphere and, particularly, the effects of the ionosphere.

Type I Data

Table I shows the average radiation flux Q, equivalent temperature $T_{\rm eq}$, and the radiation spectrum density I for various climatological conditions and geographic locations. The view angle corresponding to this data was 0.6-0.8 rad from the direction of the nadir. It can be seen that there is no conspicuous variation in the table entries for different conditions. The variation in the radiation flux and temperature is greatest in the atmospheric window band. The average temperature in this band (276°K) is in good agreement with temperatures measured by the Tiros III satellite by Nordberg et al. (Nordberg, W., W. K. Bandeen, B. J. Conrath, V. Kunde, and I. Persano. Preliminary results of radiation measurements from the Tiros III Meteorological Satellite. Journal of the atmospheric sciences, v. 19, no. 1, 1962, 2-30.

Card 9/13

The most interesting results were observed in the 4.5-8.5 μ band: in this band inversion attains values of 40-45°K, and the average equivalent temperature (277°K) is somewhat higher than expected if the main contribution is considered to be the radiation due to water vapor from the upper troposphere and stratosphere. The temperature in the 4.5-8.5 $\,\mu$ band was considerably higher in the Southern hemisphere and during the night. In 20-30% of the cases studied, the equivalent temperature in the 4.5-8.5 μ band exceeds the temperature in the atmospheric window band (8.5-12.5 u).

From the temperature correlation data, it was established that the same atmospheric radiation components contribute to the radiation flux for both the 8.5-12.5 and $12.5-38~\mu$ bands. However, the radiation registered in the 4.5-8.5 μ band was not recorded in the other bands. This gave rise to 'speculation that the radiation in this band is due to the products of dissociation of H2O, NO, and N2O.

Card 10/13

					•					
	Average 4,5—38 4,5—8,5—12,5—38 137	0ceans 4,5-38 227 4,5-8,5 44.7 8,5-12,5 55,3 12,5-38 123	4,5—38 267 4,5—8,5 48 8,5—12,5 78 12,5—38 146	N1ght 4,538 245 4,58,5 57 8,512,5 57 12,538 139		ພຣິອ	Northern hemis 4,538 243 25 4,5-8,5 36 26 8,5-12.5 56 27 12,538 138 24	Spectrum Whiz Teq	Table 1.	
• • •	255 277 276 245	250 276 268 238	261 279 283 254	255 287 273 241	255 265 279	5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5	phere 54.5 68 71 71,5 45.5	· ok I		
	55.5 35.5	0 = 0 0 0 0	18.1 5,7	544.0 666.6	56 27 65 25	55.5 5.5 6.5 6.5 6.5	7,25 5,4	=	•	
. r	verage ab eflected i	sorbed r	adiation was 23	0 w/m^2 .	In all car	ases exc	0.8 rad w n^2 , and the ept one, the exception $(10-20\%)$.	ne inco on was	ming	•

ACC NR: AP6028340

Type II Data

Analysis of data on the effective altitude of the radiating atmosphere shows that it depends on the climatological and geographic conditions directly below the point in question. The angle of view for these data was close to the horizontal. The angular distribution in the spectral bands corresponding to water vapor absorption bands indicates that the effective altitude of the radiating atmosphere is greater for a sighting in the direction of a body of water on the Earth's surface than it is for a sighting in the direction of a land mass. The altitudes were 93 km for the regions This finding confirms south of Japan and 51 km for the Australian desert. the assumption made by Bazhulin, P. A. et al. (Bazhulin, P. A. (deceased), A. V. Kartashev, and M. N. Markov, The angular and spectral distribution of terrestrial radiation in the infrared radiation spectrum. IN: Vsesoyuznaya konferentsiya po fizike kosmicheskogo prostrarstva. Moskva, 1965. Trudy, Issledovaniya kosmicheskogo prostranstva (Transactions of the All-Union Conference on Space Physics. Moscow, 1965. Space research). Moskva, Izd-vo nauka, 1965, 94-104.) concerning the presence of water vapor at an altitude of 100 km and the dependence of its concentration on the humidity conditions in large regions below.

Card 12/13

ACC NR: AF6028340

The intrared radiation at altitudes of 280 km was studied, but the results must be considered only preliminary, since the experiment was of limited duration, the satellite trajectory was such that it covered both the illuminated and dark sides of the Earth, and the latitudes varied with height. Nevertheless, it was established that the infrared radiation is concentrated in the 4.5-8.5 µ band and that its maximum is somewhere between 250 and 300 km. The total infrared radiation measured in the 0.8-38 µ band was 150 w/m², a value which corresponds to a comparatively weak solar activity. Orig. art. has: 15 figures and 4 tables.

FSB: v. 2, no. 10/

SUB CODE: 04,20,22 / SUBM DATE: 08Jan66 / ORIG REF: 007 / OTH REF: 005

Card 13/13

L 2964-66 FSS-2/EWT(1)/FS(v)-3	TT/GS/GW
ACCESSION NR: AT5023570	UR/0000/65/000/000/0094/010
AUTHOR: Bazhulin, P. A.; Kartashev, A.	V.; Markov, M. N. 841
TITLE: Angular and spectral distribution region of the spectrum	on of terrestrial radiation in the infrared
SOURCE: Vsesoyuznaya konferentsiya po i	fiziku kosmicheskogo prostranstva. Moscow,
1303, 94-103	ranstva (Space research); trudy konferentsii radiation, radiation detector, IR spectrom-
Simultaneous recordings of angular and s 4—38 μ within angles of $\pm \pi/2$ from the n USSR on 6 and 18 June 1963. A special I urements is shown in Fig. 1 of the Englo	quipment and results of spacehorne measurement of terrestrial radiation at high altitudes spectral distribution were carried out at madir over the middle latitudes of the Europ IR pulse spectrometer developed for the measure. It operates as follows: A flat scan /2 (scanning time, 100 sec), and a spherical
Card 1/4	


L 2964-66


ACCESSION NR: AT5023570

Cassegrainian objective (diameter, 33 mm; focal length, 200 mm) directs the radiation onto a low-inertia bolometer. The bolometer has a time constant of 5-7 msec, resistance of 1000 ohm, and dimensions of the receiving surface of 0.3 x 9 mm. The radiation beam is intersected by the plates of a rotating (7 rps) modulator. The plates are made of quartz, fluorite, and lithium fluoride, and a nontransparent metallic plate is also included. The plates are situated asymmetrically in order to code the position of signals from individual plates in time. The signals from the bolometer are fed to a wide-band pulse amplifier with a bandpass of 0.5-200 cps and a gain of 10^5 . The amplified signals are transmitted to the ground by the telemetry system. The measurements yielded the following conclusions: In the broad bands of the IR spectrum, the common shape of the curves of the angular distribution corresponds to that for radiation of a relatively isotropic object. The deviation from the isotropy on the edges of the Earth's disk is smaller during observations at 400-500 km than during observation at 25-30 km. Individual measurements showed no noticeable difference in the thermal radiation intensity between day and night. A slight dependence of the shape of the angular distribution curves on height at 200-500 km was noted. It was also found that in many cases the radiation maximum is located in the spectral region of 4.5-8.5 μ and that the effective temperatures for this region are higher (270-280K) than for other regions of the spectrum. Original art. has: 7 figures and 2 tables. [GS]

Card 2/4

	SOCIATION:	R: AT5023570				Ø	
SU	BMITTED:	02Sep65	enci	· 01	SUB	CODE:	
МО	REF SOV:	005	OTHE	R: 002		PRESS:4109	
						14명 : 영화 하는 15명 등 등 한 17일 : 전 15명 15명 등 한 15명 : 전 15명 15명 1	

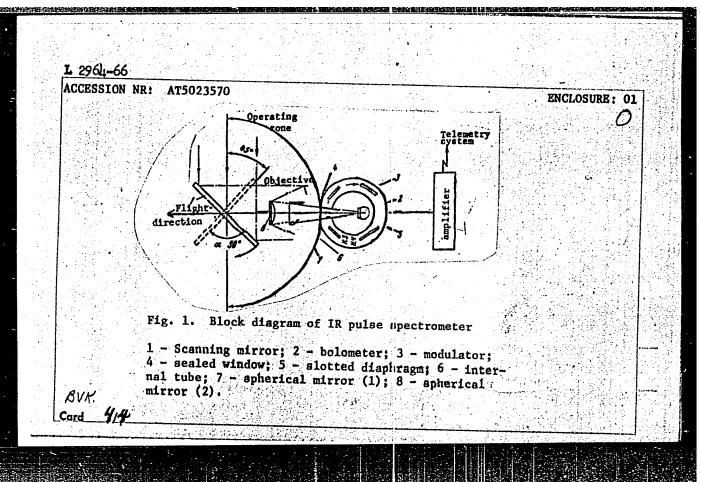

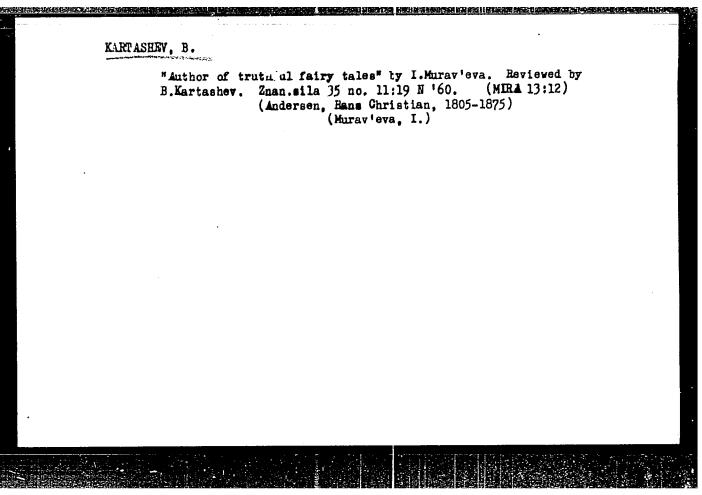

enen mantaneta metilinen fin sikerikasika eta eta istoriak eta i

KARTASHEV, G. Practical training at machine-tractor stations. Prof.-tekh.obr. 11 (MIRA 7:10)

no.6:8-10 5 '54.

1. Zamestitel' direktora po uchebno-proizvodstvennoy chasti uchilishcha mekhanizatsii sel'skogo khozyaistva No. 4 (Ivanovskaya oblast') (Technical education) (Field work (Educational method))

CIA-RDP86-00513R000720910017-4" APPROVED FOR RELEASE: 06/13/2000

RRIVOKON',A.; RASHMADZHYAN,V.; KARTASHEV,G.

Pedagogical lectures. Prof.-tekh. obr. 12 no.5:21-22 ky '55.
(MURA 6:8)

1. Nachal'nik Voroshilovgradskogo oblastnogo upravleniya trudovykh reservov (for Krivokon'). 2. Starshiy inxhener Arayanskogo respublikanskogo upravleniya trudovykh reservov (for Rashandshyan)

3. Zamestitel' direktora po uchebno-proixvodstvennoy chasti uchilishcha mekhanizatsii sel'skogo khoxyaystva no.4. (for Kartashev)

(Technical education)

SOV/27-58-11-5/29 Kartashev, G., Director AUTHOR: Serious Deficiencies in Teaching Pupils to Work (Ser'yëznyye TITLE: nedostatki v obuchenii shkol'nikov trudu) Professional'no-tekhnicheskoye obrazovaniye, 1958, Nr 11, PERIODICAL: p 5 (USSR) The author tells of the manner in which young people who ABSTRACT: have finished 10 classes of a school are sometimes treated when applying for an applientice job at a plant. The secondary school graduate must teach himself, with but little help from workmen. This can be observed at the "Ivtorfmash", "Ivtekmash" and other plants. Dealing with the 11-year schools of the Ministers:va prosveshcheniya (Ministry of Education) the author states that practice has shown that they are unable to cope with the task of training qualified workmen. This task can be successfully carried out by the system of Labor Reserves. Remeslennoye uchilishche Nr 6 (Ivanovskaya oblast:) (Trade ASSOCIATION: School Nr 6 (Ivanovo Oblast)) 1. Personnel--Training 2. Industrial training--Effectiveness Card 1/1

22(1)

SOV/27-59-4-19/28

AUTHORS:

Kartashev, G., School Director; Khvalenskiy, V., Educator

TITLE:

The Results are Evident

PERIODICAL: Professional no-tekhnicheskoye obrazovaniye, 1959, Nr 4,

p 26 (USSR)

ABSTRACT:

Both the staff and the students of the Trade School Nr 6, Ivanovo, have now introduced self-service into their school on a broader scale. The author gives particulars on it, pointing out that it resulted in raising discipline and

improving the students' learning progress.

ASSOCIATION: Remeslennoye uchilishche Nr 6 (Trade School Nr 6), Ivanovo

Card 1/1

CIA-RDP86-00513R000720910017-4" APPROVED FOR RELEASE: 06/13/2000

Replacement of machine operators. Prof.-tekh. obr. 20 no.6:20 (MIRA 16:7)

Je 163.

1. Direktor mikhaylovskogo uchilishcha mekhanizatsii sel'skogo khozyaystva No.l Volgogradskoy oblasti.
(No subject heading)


denie britanio minimistra in marchies de la company de la

KARTASHEV, G. A.

Bee Culture - Equipment and Supplies

Plastic frame. Pchelovodstvo 29 No. 10, 1952

Monthly List of Russian Accessions, Library of Congress, November 1952. UNCLASSIFIED

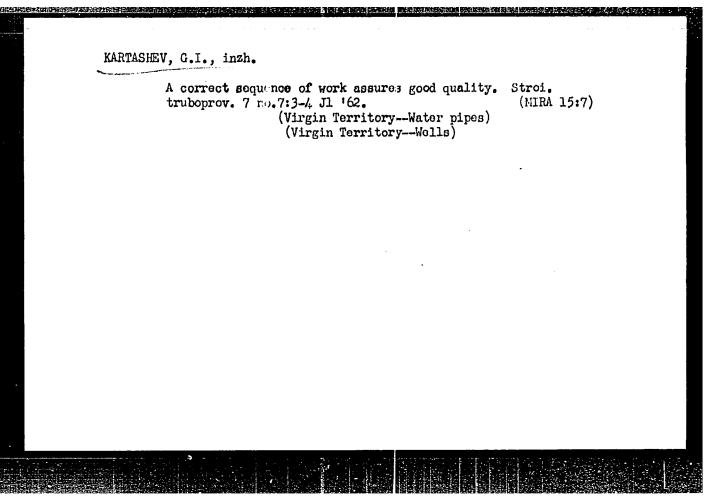



BURGOV, N.A.; DAVYDOV, A.V.; KARTASHOV, G.R.

Comparative measurements of the form of the \$\beta_{\text{-spectra}}\text{ of Au}^{198}\$ and \$\text{Zn}^{69}\$. Zhur. eksp. i teor. fiz. 41 no.5:1337-1339 N '61.

(Gold-Spectra)

(Zinc-Spectra)

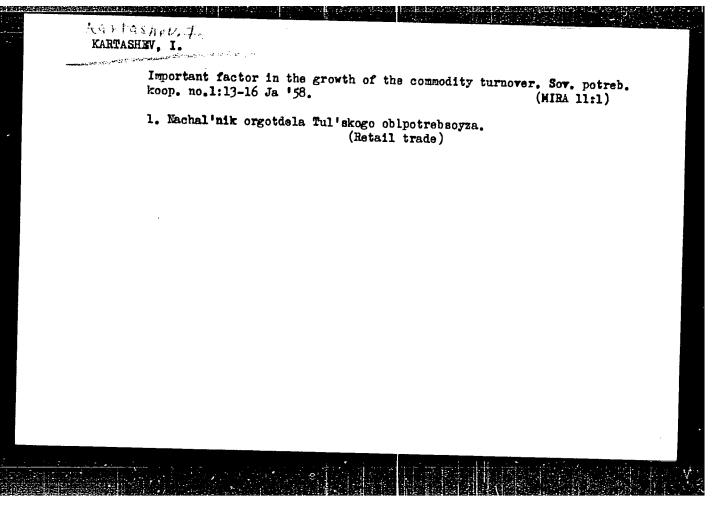

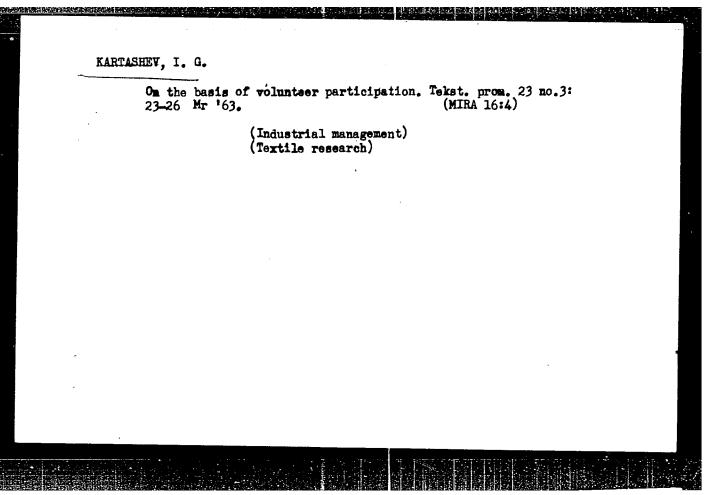

Local organization of the Scientific and Technical Society in the Dushanbe Shoe Factory. Kozh. obuv. prom. 5 no.7:43 [MIRA 16:8] Jl 163. (Dushar be—Shoe industry—Technological innovations)


EWT (m)/EWP(t)/EWP(b) SOURCE CODE: UR/0122/65/000/009/0064/0068 11972-66 ACC NR: AP5028986 AUTHORS: Shainskiy, M. Ye. (Engineer); Kartashev, I. N. (Professor); Naysh, M. N. (Engineer) ORG: none TITLE: Vibration grinding and polishing of parts SOURCE: Vestnik mashinostroyeniya, no. 9, 1965, 64-68 TCPIC TAGS: metalworking; vibration, vibration effect, metal polishing, metal finishing, copper sulfate, nonmechanical metal removal, GRINDING, ABRASIVE ABSTRACT: Some aspects of vibration grinding and polishing are discussed. The polishing action is the result of the relative velocities of the particles and the parts. In the past, the motion of the vibrating reservoir has been made elliptical. The most effective abrasive action takes place over only about 0.1 of the period, giving a vibrational efficiency of $\approx 15\%$ for this type of a device. By making the trajectory of the reservoir a circle, the efficiency can be increased to 70-75%. The abrasive force for such a case is derived as P. = imA o (where m = mass of polished part; A and ω = amplitude and frequency of reservoir UDG: 621.924.61.7 Card 1/3


L 11972-66

ACC NR: AP5028986

vibration; \mathcal{E} = characteristic constant for the damping and frictional properties of the load, including parts, abrasive particles, and chemicals). Presently, frequencies of up to 3000 cpm and amplitudes of 6—7 mm can be used. Figure 1 shows the actions of the reservoir walls on the charge for elliptical and circular motions, with a baffle installed in the reservoir. Preliminary tests with baffles show that the efficiency can be increased to 90—95% and capacity by factors of 2—3. The recommended abrasive particle size is shown to be $\chi = 1 \text{ min/5}$ (where 1 min = 1 min/mum dimension of part to be polished). A new modification of the process uses a compound in the charge, which reacts chemically with the metal of the part and speeds up the polishing. For example, using cusp, in the charge to machine steel, the time required to remove 15 mg/cm² can be reduced from 1 hour (without 1 cusp_4) to 5—10 minutes. Although the cost of this chemi-mechanical process increases by a factor of 2—3, the capacity is increased by a factor of 10. A finish of class 10—12 can be obtained by the above methods.

Card 2/3

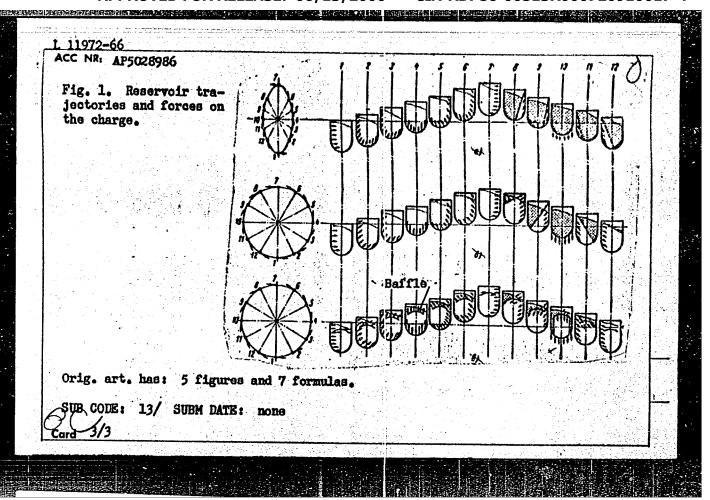

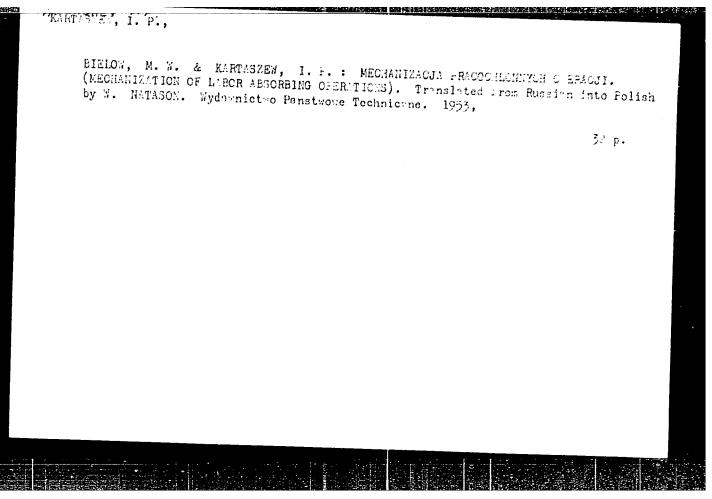


Transcription of Yekut and Evenki geographical names on topographical maps, Maych, dokl. vys. shkoly; geol.-geog. nauki no.3:209-212 '58. (MIRA 12:1) L.Moskovskiy universitet, geograficheskiy fakul'tet kafedra geomorfologii. (Yakutia--Maps, Topographic) (Evenki Mational Area--Maps, Topographic) (Names, Geographical)


KARTASHEV, K. B.


Milling Machinery, Lime

Set-up for producing ground, unburned lime. Elek: sta. 23 No. 3, 1952, Inzh.

SO: Monthly List of Russian Accessions, Library of Congress, July 1958, Uncl.

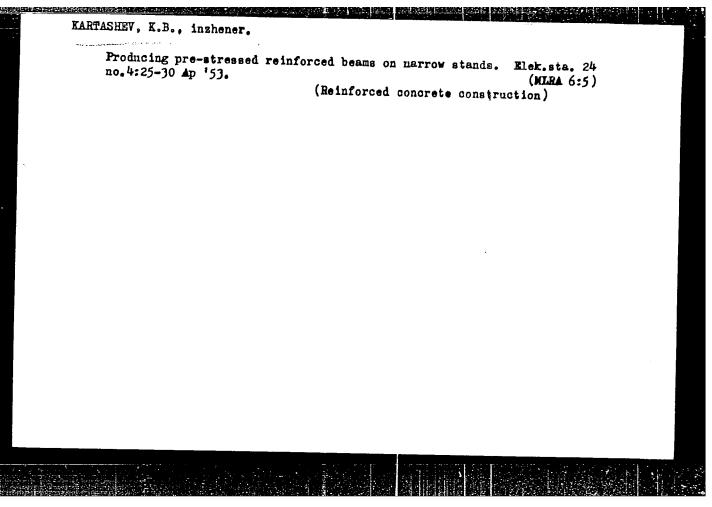

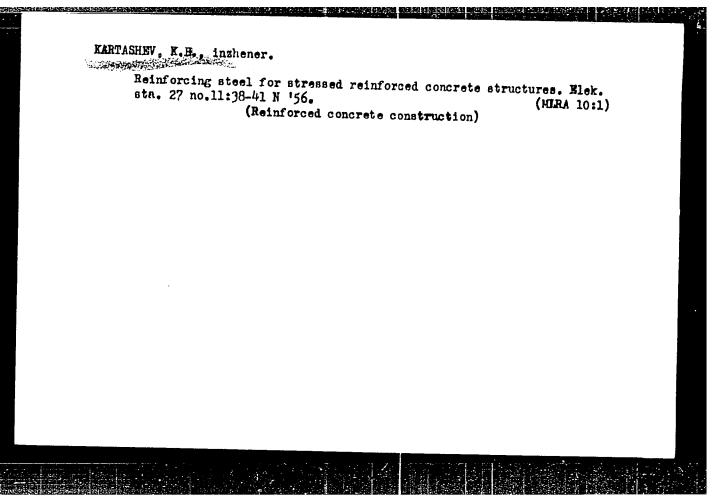

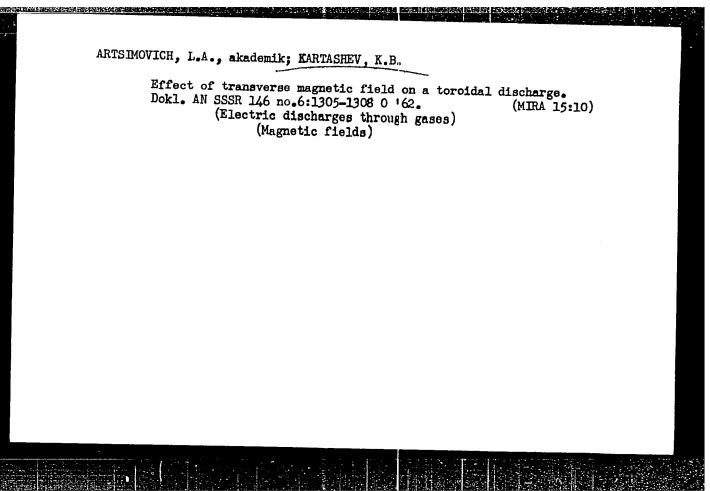

KARTASHEV, K. F.

PA 20T60

USSR/Radio


Oct/Nov 1946

Capacitors, Ceramic Dielectric Capacitors, High Frenquency

"New Types of High-frenquency Ceramic Capacitors," G. I. Skanavi, Dr of Physico-mathematical Sciences, D. M. Kazarnoviskiy, Candidate of Mechanical Sciences, K. F. Kartashev, Mechanic, 8 pp

"Radiotekhnika" Vol I, No 7/8

The electrophysical properties and design data for new types of high-frenquency ceramic capacitors with/improved performance characteristics and higher capacitance per unit volume:

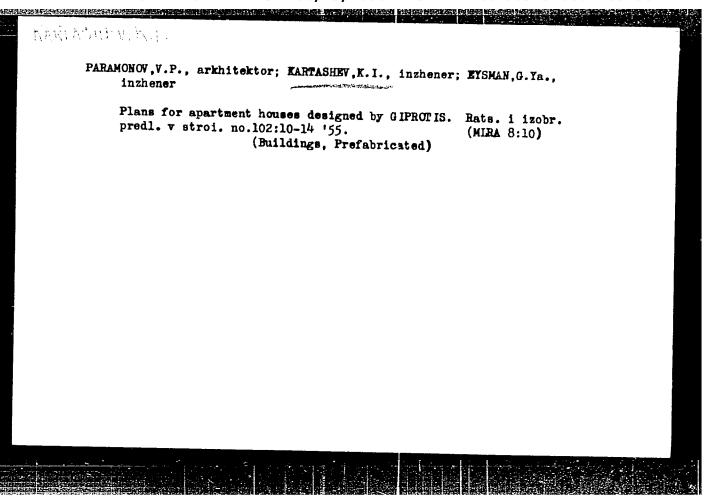

8/264/63/000/003/004/004 A052/A126

AUTHOR:

Kartashev, L.

TITLE:

New development in airfield maintenance

PERIODICAL: Referativnyy shurnal, Vozdushnyy transport, no. 3, 1963, 21, abstract 3B146 (Aviatsiya i kosmonavtika, no. 10, 1962, 66 - 70)

TEXT: Concrete surface of runways must; be even since unevenness causes an increased vibration of the aircraft. Even a 5 - 7 mm difference between adjacent plates is inadmissible. Deep and sharp cleavages of corners and edges of concrete plates are especially dangerous for tires. They may cause cuts and destruction. The side and in particular the end safety strips must secure complete safety during rolling out of the sirplane. The carrying capacity of the ground on safety strips must be not lower than 10 kg/cm². For this purpose the mafety strips must be rolled with pneumatic rubber rollers. The cleanness of artificial surfaces of an airfield depends to a high degree on its state. Concrete plates begin

Card 1/3

New development in airfield maintenance

S/264/63/000/003/004/004 A052/A126

to get demolished owing to the seams left unsealed, undressed cleavages of corners and edges of plates and unrepaired cracks. It is particularly important to keep clean those aprons where engines are tested. It is important to find and eliminate in due time the defects which may cause flying accidents. Nowadays the scope of regains of artificial surfaces has increased. New high-strength repair materials are needed and to these belong the rubber-bituminous compounds "Izol" and epoxy resins. The frost-proof "Izol" gives a reliable adhesion with concrete when sealing seams and dressing cleavages on plates, it is not destroyed by a shorttime action of high temperatures and by dynamic pressure of airplane jet engines and heat engines. A high effect when dressing through-going cracks and pasting concrete is achieved by using epoxy resins. The technology of applying "Izol" compound and 3H-5 (ED-5) and 3H-6 (ED-6) epoxy resins is described. It is pointed out that pasted concrete is not destroyed under aircraft loads. It is pointed to the danger of cleaning artificial surfaces with KIIM -1 (KPM-1) machines furnished with steel wire brushes, since steel needles broken off from the brush may render an airplane engine unserviceable. Caprone fleece or rubber plate brushes Card 2/3

New development in airfield maintenance

s/264/63/000/003/004/004

must be used. Caprone brushes serve 10 times longer than steel wire brushes. The creation of a new spraying-washing machine KIIM -2 (KPM-2) is reported; it has a 10 m3 tank and caprone and steel fleece brushes. For a complete removal of concrete chips, stone, gravel and occasional foreign objects from artificial surfaces, heat engines or special carriages with BK -1 (VK-1) engines mounted on them, are used. Such machines blow off completely from runway axis to shoulders dirt, stones, concrete chips and other small objects in 1.5 - 2.0 hours. Taking into account the high consumption of deficient fuel by these machines it has been considered to be better to use for cleaning artificial surfaces the airfield vacuum-cleaning machines operating on the vacuum cleaner principle. For cleaning artificial surfaces in winter it is recommended to use cleaning machines with brushes on which steel-wire rope pieces 0.5 m long are reeled. They maintain their service properties during 70 hours. The breaking off of the wire has reduced considerably. To collect broken wire pieces an electromagnetic collector must be used.

A. Novobytov

[Abstracter's note: Complete translation] Card 3/3

ACC NR. AP6018789

ORG:

SOURCE CCDE: UR/0416/65/000/012/0071/0075

CIA-RDP86-00513R000720910017-

AUTHOR: Kartashev, L. (Engineer, Colonel)

26 13

APPROVED FOR RELEASE: 06/13/2000

TITLE: Airfield battle stations. [Snow clearance at military mirfields]

SOURCE: Tyl i snabzheniye sovetskikh vooruzhennykh sil, no. 12, 1965, 71-75

TOPIC TAGS: snow, ice, equipment winterization, airfield maintenance equipment, airfield approach obstruction, airfield auxiliary equipment, MILITARY AIRFIELD

ABSTRACT: The author discusses techniques and equipment used in snow and ice removal and the winterization of facilities and equipment at military airfields. Procedures for removing snow from concrete and grass-covered runways are described: concrete runways are completely cleared of snow while a light snow cover, left on grass-covered runways, is tamped down and leveled. The problem of preventing icing on runways and the use of jet engines to melt ice and snow is mentioned.

SUB CODE: 01,15/ SUBM DATE: none

snow removal equipment

Card 1/1 mcr

. machine, with a capacity of 1500 tons/hr, can replace two D-470 machines in airport clearing work; it can take up to 1.7 m of snow and throw it 35 m. An important advance was the development of the powerful D-558


<u>UDC:</u> none


ACC NR: AP7006116


machine, which has a capacity of over 3000 tons/hr and can throw snow over 60 m. The D-558 rotary snow plow and sprinkling machine can successfully handle frozen snow, and is intended for the maintenance of airports and highways in winter and in summer. It can also be used for degasification, disinfection, and decontamination work, as well as for the paving of airports and roads and for fire fighting. Orig. art. has: 3 figures.

SUB CODE: 01, 13/ SUBM DATE: none/ ATD PRESS: 5115

Card 2/2

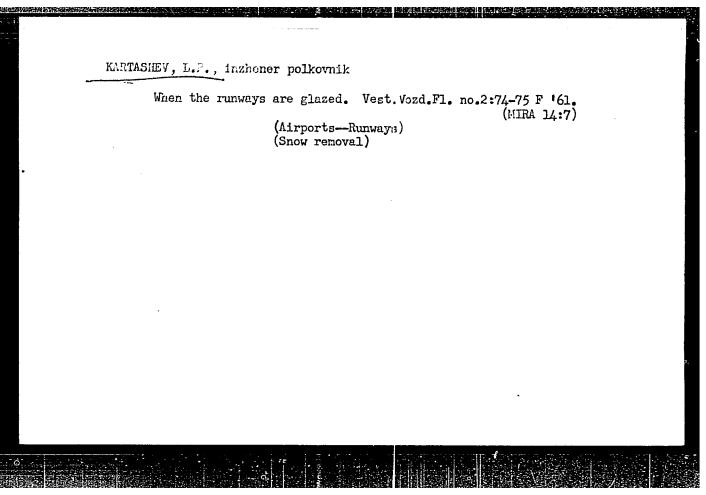

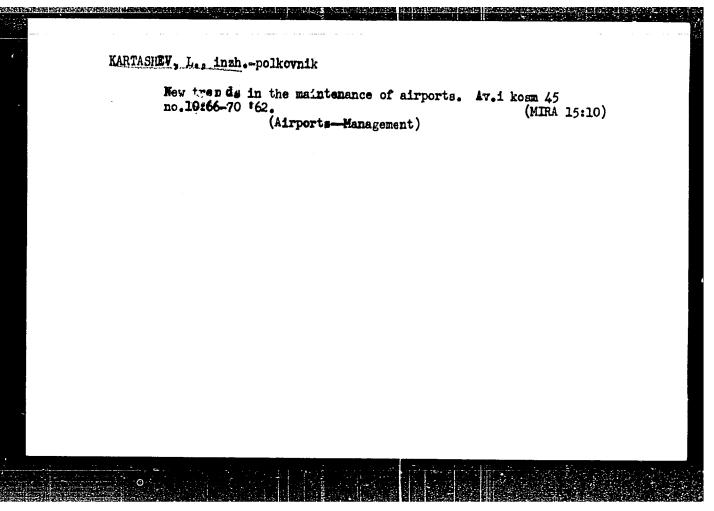

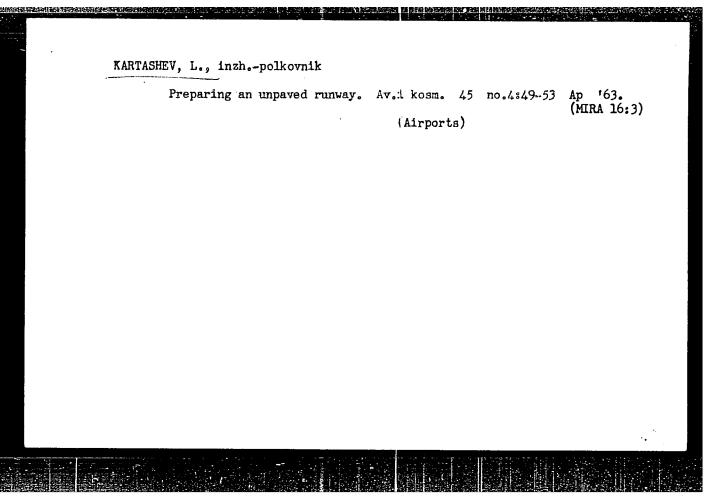

KARTASHEV, M.V., NECHINENNVI, D.K., (Candidates of Veterinary Sciences, Crimean MIVS)

"From an experiment on the control of poultry ectoparasities in buildings "

Veterinariya, Vol 39, no 1, Jan 1962. pp 64

NECHINENNYY, D.K., kand.veterinaraykh nauk; KARTASHEV, M.V., kand.
veterinarnykh nauk

Control of ectoparasites of birds in posltry houses.
Veterinariia 39 no.1:62-66 Ja 162. (MIRA 15:2)

1. Krymskaya nauchno-issledovatel*skaya veterinarnaya
stantsiya. (Poultry-Disesses and pests)

ROMANYUK, F.I.; PETROV, G.S. [deceased]; GOLUMEVA, A.N.; KARTASHEV, N.A.;
SAZOMOVA, V.M.; KAMENSKIY, I.V.; OGNEVA, N.Ye.

New methods for preventing the flew of reservoir waters inte wells being expleited. Trudy vNII no.16:106-127 '58.

(Oil field fleeding)

(MIRA 11:12)

KARTASHEV, N A.

93-6-10/20

AUTHOR:

Romanyuk, F.I., Kravchenko, I.I., and Kartashev, N.A.

TITLE:

Exclusion of Bottom Waters from Producing Oil Wells by Means of Kerosene-Gement Mixtures (Isolyatsiya podoshvennykh vod v ekspluatiruyushchikhsya skvazhinakh kerosinotsementnymi smesyami)

PERIODICAL: Neftyanoye khozyaystvo, 1957, Nr 6, pp. 35-40 (USSR)

ABSTRACT:

Research and practice has shown that bottom water exclusion from oil wells by means of cement pluzs is ineffective and leads to petroleum losses. Bottom waters can be most effectively excluded by introducing into the strata colloidal or true solutions, or various suspensions including conventional water-cement mixtures. Experience with the water-cement mixtures at the Bavly and Tuymazy oil fields demonstrated their superiority to conventional well cementing under pressure. But kerosene or Diesel oil mixed with cement is superior even to mixtures of water and cement because they set and harden only when the keroseme is displaced by water. Furthermore the properties of kerosenscement mixtures can be improved by adding cement accelerators such as cresol, acidol, neutralized black contact (NCM), Petrov's "contact", and grade III asphalt. In 1956 kerogeme cement mixtures were tested in both the Bashkirskaya and the Tatarskaya ASSR. The tests were made in 11 wells flooded with bottom water (five wells each in the Tuymazy and Serafim oil fields and one in Bavly). Fig. 1 shows the layout and assembly

Card 1/3

93-6-10/20

Exclusion of Bottom Waters from Producing Oil Wells by Means of Kerosene-Cement Mixtures (cont)

of the coment mixing equipment used in the tests. The proportions of kerosene to cement were calculated with the aid of formulas and the results are shown in Fig. 2. N.G. Imanayev and S.A. Chumanov of the Petroleum Production Administration of the Tuymazy Petroleum Industry (NPU Tuymazaneft') and A.M. Paykov and B.F. Shtur of the Petroleum Production Administration of the Oktyabr'skiy Petroleum Industry (NFU Oktyabr'skneft') participated in the field experiments. The tests were successful in seven wells but failed in the others (Table 1), showing that kerosene-cement mixtures are suitable for extensive industrial application. In order to utilize this method of water exclusion it will be necessary to improve cementing equipment and materials. Airtight cement rings, non-shrink and expandable cements, plugging materials of greater plasticity, and packers of drillable material are needed. New types of cumulative action perforators will have to be designed so that the bullet or torpedo chambers are arranged crosswise in one plane and simultaneous firing at several points in the casing and cement collar and sufficient crushing of the surrounding rock is ensured. The available conventional gun perforators, torpedoes (TPK-22 and TFK-32) and selective perforators (SSP) do not satisfy industrial requirements. The cumulative action bulletless perforators (PK-103) are best but are produced in insufficient quantities. A more exact method for determining the place


93-6-10/20

EAPPROVED POR RELEASEF 06/19/2080 Let As RDP86-005 (SR000720910017-4" Mixtures (cont)

where a stratum is to be fractured will have to be developed because the present radiometric methods for determining oil-water contact in wells and radioactive isotope methods for determining places where strata are to be fractured are inaccurate. Without a solution to the above problems and without careful study of the conditions and nature of flood in individual wells and in entire formations the successful exclusion of water from oil wells cannot be ensured even with the best of methods. There are two figures and one table. The three references are USSR.

AVAILABLE: Library of Congress

Card 3/3

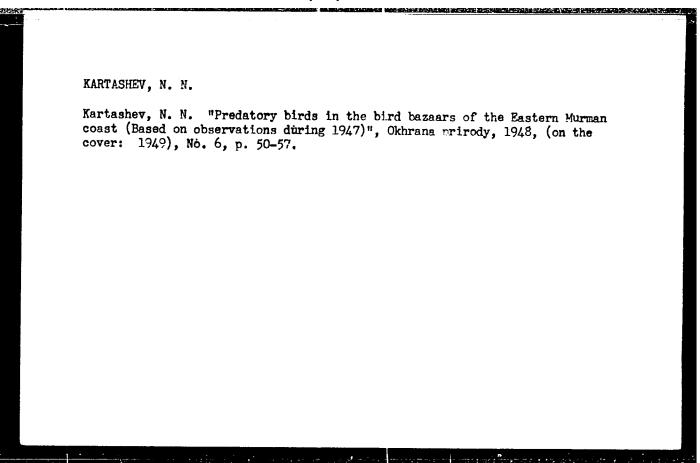

KARTASHEV, N. N.

"Material on the Biology of Auks in the East Atlantic Ocean." Thesis for degree of Cand. Biological Sci. Sub 8 Mar 50, Moscow Order of Lenin State U imeni M. V. Lomonosov

Summary 71, 4 Sept 52. <u>Dissertations Presented for Degrees in Sci. and Engi. in Moscow in 1950</u>. From <u>Vechernyaya Moskva</u>. Jan-Tec 1950.

KARTASHEV, N. N.

Kartashev, N. N. (From the History of the Moscow Univ.) The history of zoology at the Moscow University. P. 115

Chair of Zoology of Vertebrates Nov. 25, 1950

SO: <u>Herald of the Moscow University</u> (Vestnik), Series on Physical, Mathematical and Natural Sciences, No. 2, Vol. 6, No. 3, 1951

DEMENT'YEV, G.P.: KARTASHEV. N. N.

Zoology - Turkmenistan

Land vertebrates of the western sector of the main Turkomanian Canal and perspectives of changes among them., Zool. zhur., 31, no. 1, 1952


Monthly List of Russian Accessions, Library of Congress, March 1952. UNCLASSIFIED

DEPOENT YEV, G.P.; KARTASHEV, N.N.; SOLDATOVA, A.N.


Feeding habits and the practical significance of certain predatory birds in southwestern Turkmenia. Zool.zhur. 32 no.3:361-374 '53. (MLRA 6:6)

1. Biologo-pochvennyy institut Moskovskogo gosudarstvennogo universiteta imeni M.V. Lomonosova. (Turkmenistan--Birds of prey)

New occurrence of Bond.) in Turkmen	the Turkmanian jerbo distan. Biul.MOIP. Oto	a (Jaculus turcmenicum Vinogr. et i.biol. 58 no.1:11-12 '53.
(Tur	kmenistanJerboas)	(MIRA 6:5) (JerboasTurkmenistan)
		·

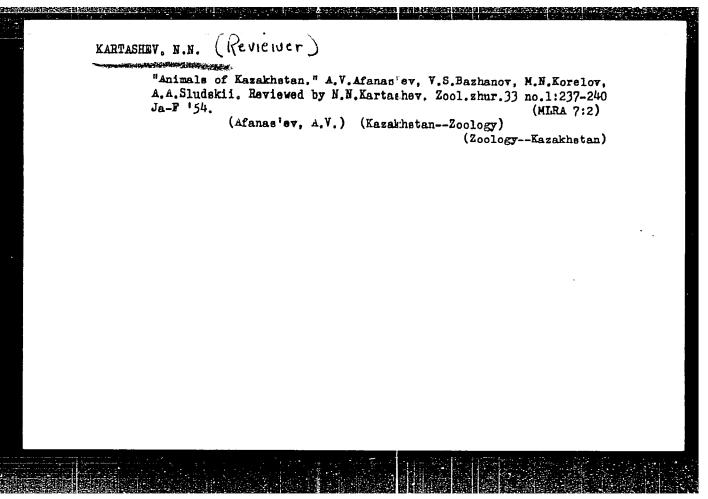

Migrations of woodchats. Zool.zhur. 33 no.5:1183-1184 S-0 '54. (MLRA 7:11) 1. Biologo-pochvennyy nauchno-issledovatel'skiy institut MGU im. M.V.Lomonosova. (Shrikes)

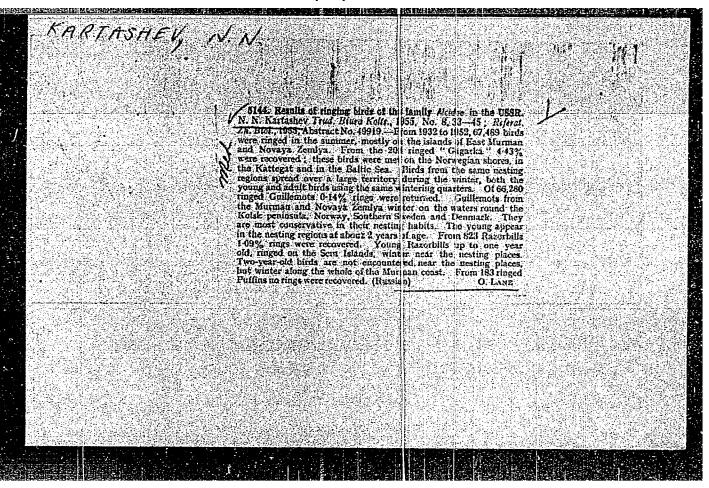

KARTASHEV, N. H.

Adaptive role of age changes in the proportion of the extremities in the alciformes. Zool. zhur. 34 no.4:87:1-884 J1-Ag '55.

(MIRA 8:9)

1. Kafedra zoolegii pozvonochnykh biologo-pochvennogo fakuliteta Moskovskogo gosudarstvennogo universiteta imeni M.V.Lomonosova (Auks)


USSR/Biolo	gyOrnithology
Card 1/1	Pub. 32/39
Authors	Kartashev, N. N. Cand. Biol. Sc.
Title	About the diving of birds
Periodical	Priroda 44/1, 118119, Jan 1955
	[22] 현실의 물론 물론은 어려운 사용, 12, 12, 12, 12, 12, 12, 12, 12, 12, 12
Abstract	The author notes how some birds, by using their feet as paddles to break through the surface of the water, dive and sometimes swim short distance.
Abstract Institution	The author notes how some birds, by using their feet as paddles to break through the surface of the water, dive and sometimes swim short distance under water in search of food. Other varieties use the inertia of their flight. One particular instance is cited of a tringa hypoleucos which, after having been wounded by a shot, dived and swam 8-10 meters under
	The author notes how some birds, by using their feet as paddles to break through the surface of the water, dive and sometimes swim short distance under water in search of food. Other varieties use the inertia of their flight. One particular instance is cited of a tringa hypoleucos which, after having been wounded by a shot, dived and swam 8-10 meters under

TEPLOV, V.P.; KARTASHEV, N.N.

Biological bases of hunting regulations for aquatic birds in the central regions of the European U.S.S.R. Zool.zhur. 35 no.1:77-88 Ja '56. (MLRA 9:5)

1. Okskiy gosudarstvennyy zapovednik i biologo-pochvennyy fakul'tet Moskovskogo gosudarstvennogo universiteta imeni M.V. Lomonosova.

(Birds, Protection of)

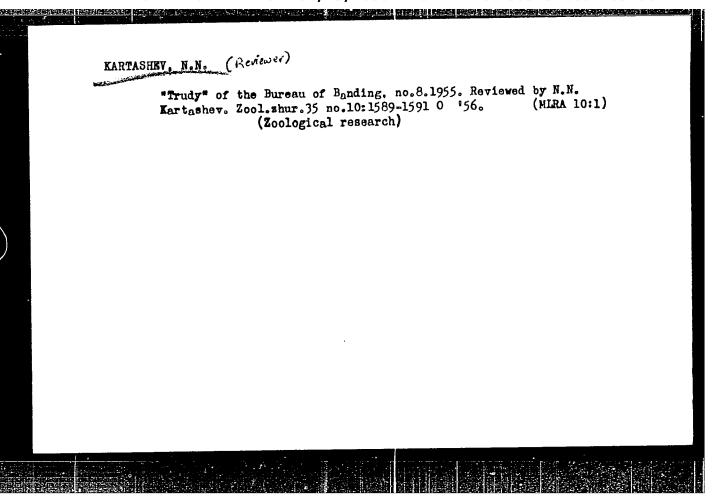


KUMARI, E.V., professor, otvetstvennyy relaktor; ONNO, S.Kh. Onno, S.H.]
redaktor; PIYFER, I.Ya. [Piiper, I.J.], professor, redaktor; Tal'TS,
S.Ya. [Talts, S.J.], kandidat biologicheskikh nauk, redaktor;
KHABERMAN, Kh.M. [Haberman, H.M.], redaktor; KARTASHEV. J.N.,
redaktor izdatel'stva; POLYAKOVA, T.V., tekhnicheskiy redaktor


[Proceedings of the Second Baltic Ornithological Conference] Trudy
Vtoroi Pribaltiiskoi ornitologicheskoi konferentsii. Moskva, Izd-vo
Akademii nauk SSSR, 1957. 427 p. (MIRA 10:2)


1. Pribaltiyskaya ornitologicheskaya konferentsiya.2d, Tallin, 1954.
2. Institut zoologii i botaniki Akademii nauk Estonskoy SSR (for


1. Pribaltiyakaya ornitologichaskaya konferentsiya.2d. Tallin. 1954.
2. Institut zoologii i botaniki Akademii nauk Estonskoy SSR (for Kumari, Onno) 3. Deystvitel'nyy chlen Akademii nauk Estonskoy SSR (for Khaberman)


(Baltic Sea region-Birds)

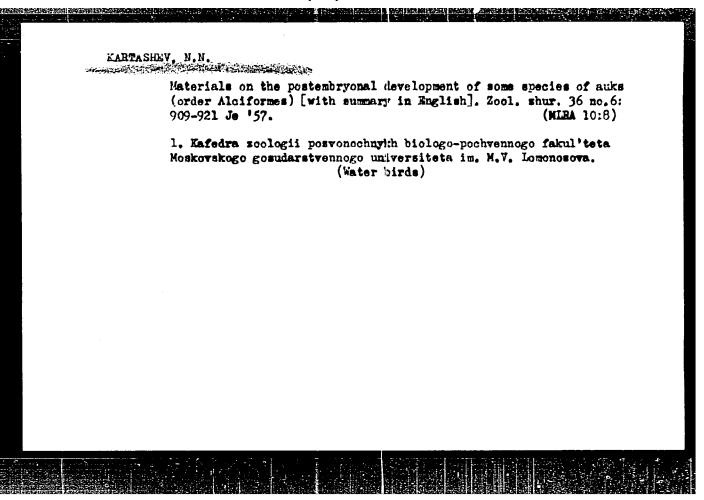


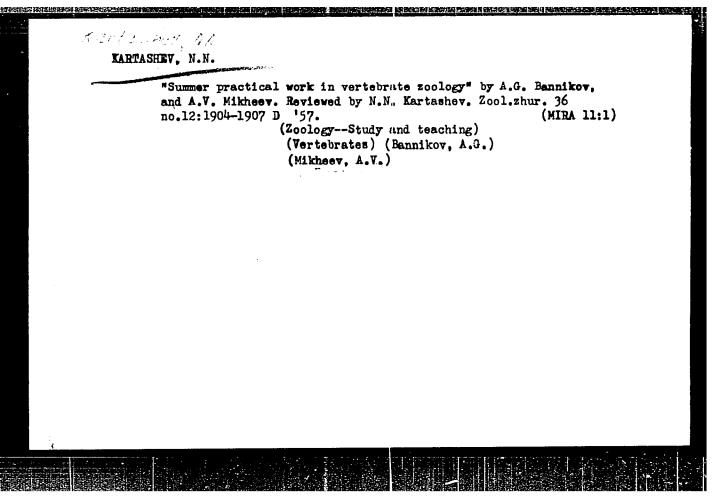

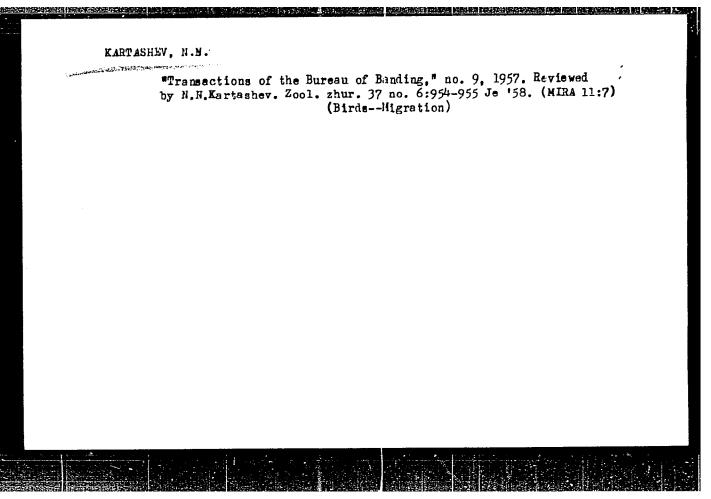

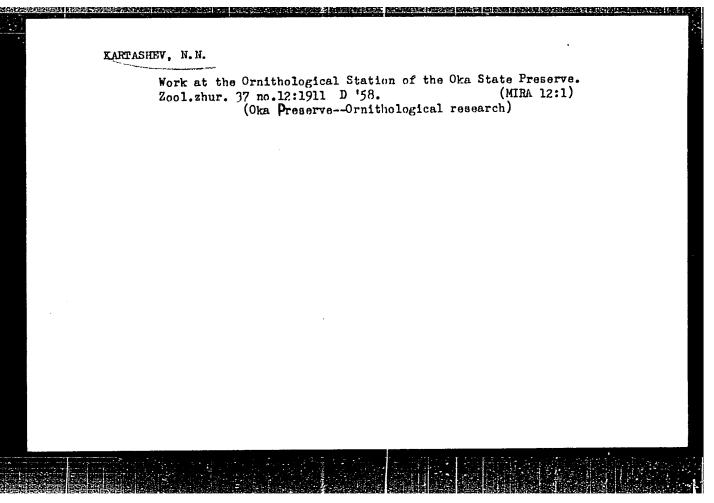

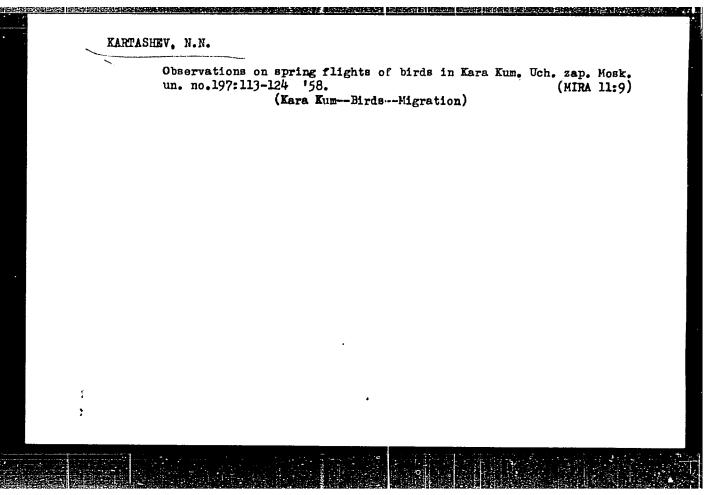


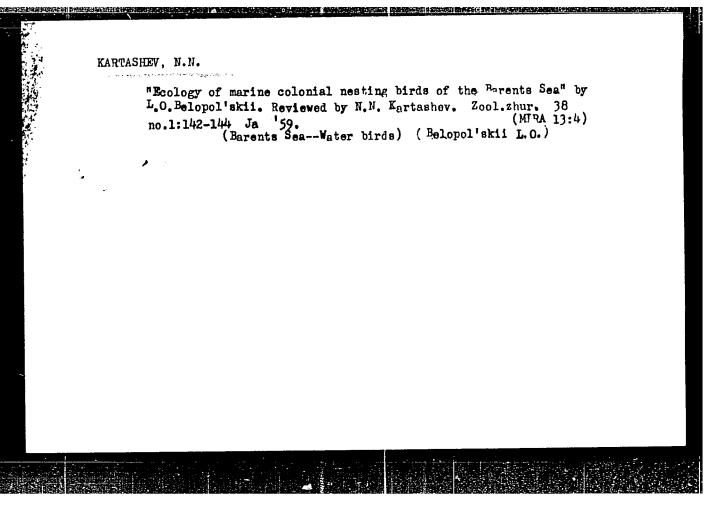



Types of postembryonic development in birds. Mauch.dokl.vys.shkoly; biol.nauki no.2:33-38 '60. (MIRA 13:4) 1. Rekomendovana kafedroy zoologii pozvonochnykh Moskovskogo gosudarstvennogo universiteta im. M.V. Lomonocova. (ONTOGRNY)


Birds of Komandorskiye Islands and some suggestions on their efficient utilization. Zool zhur. 40 no.9:1395-1410 S '61. (MIRA 14:8)

1. Department of Vertebrate Zoology, Biologico-Pedological Faculty, State University of Moscow. (Komandorskiye Islands--Birds)

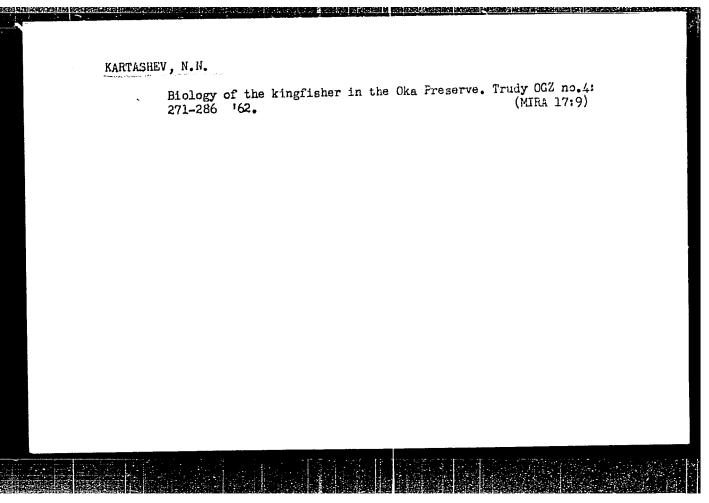

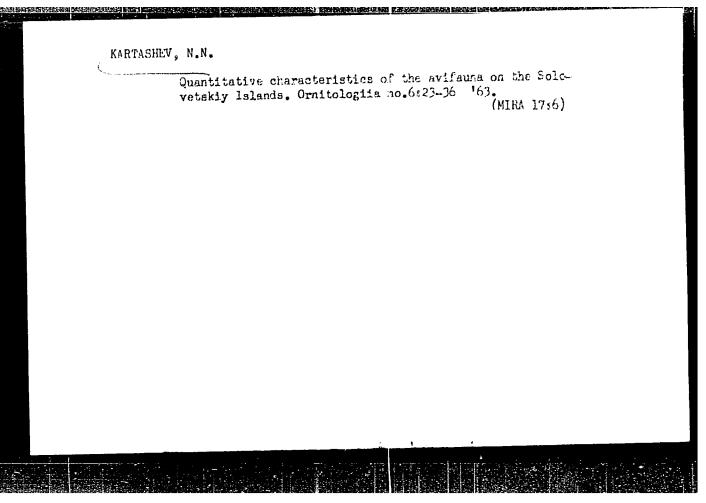

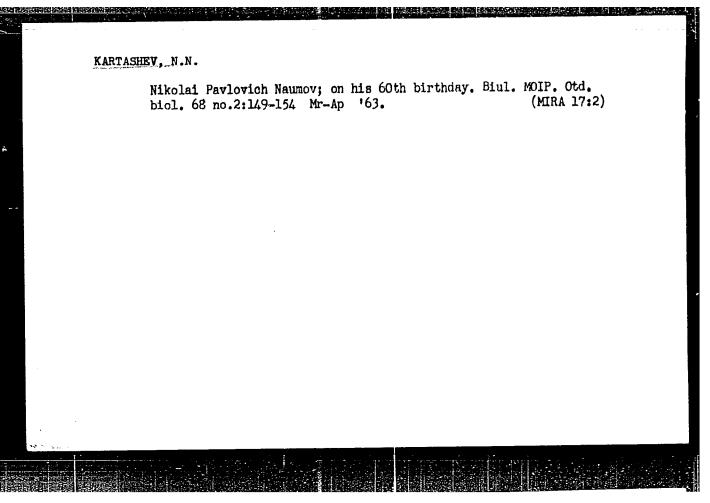

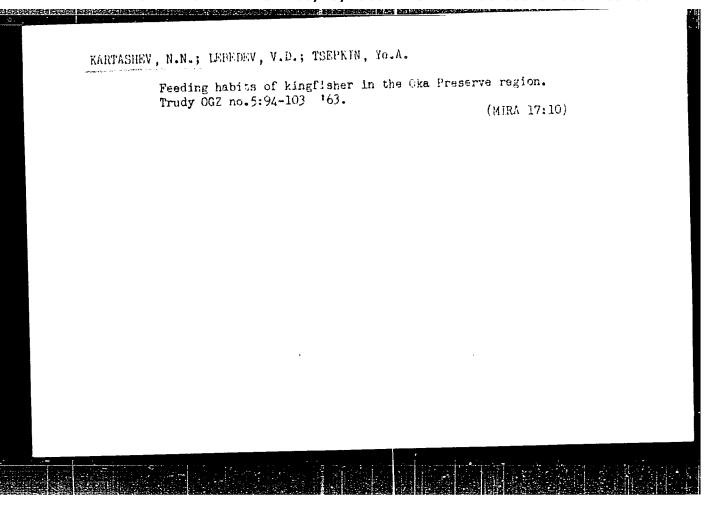

KARTASHEY, N.N.

Characteristics of reflex responses of the cardiovascular system to the effect of water of different temperature on the skin of the face. Nauch.dokl.vys.shkoly; biol.nauki no.3:56-59 165.

(MIRA 18:8)

1. Rekomendovana kafedroy fiziologii i morfologii Volgogradskogo pedagogicheskogo instituta.

IT. ICHEV. V.D.; KARTASHEV. N.N.


Evolutionary significance of the transformations of the ear part of the skull in auks. Zool. zhur. 44 nc.6:937-940 '65.

(MIRA 18:10)

1. Biologo-pochvennyv fakulitet Moskovskego gesudarstvennogo universiteta.

AVERKINA, R.F.; ANDREYEVA, N.G.; KARTASHEW, N.N.

1. Kafedra zoologii pozvonochnykh biologo-pochvennogo fakuliteta Moekovskogo gosudarstvennogo universiteta i laboratoriya immunologii embriogeneza Instituta eksperimentalinoy biologii AMN SSSR, Moskva.

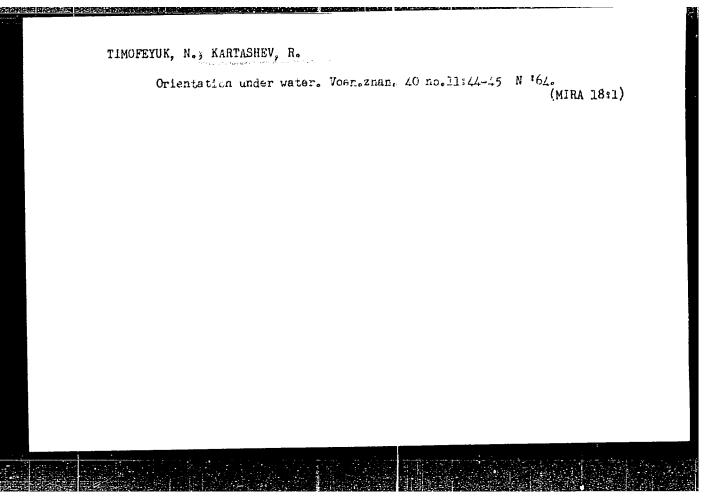

KAHTASHEV. Rostislav Dmitriyevich; KAZANKOV,A.A., redaktor; IGOSHIN,M.G., redaktor; KARYAKINA,M.S., tekhnicheskiy redaktor

[Navy manual] Posobie po voenno-morskomu delu. Moskva, Izd-vo DOSAAF, 1955. 237 p.

(Navigation) (Warships)

ANDREYEV, Vitaliy Vasil'yevich; LARYASHRVA Beatialan-Diminizarich; IGOSHIN,
M.G., redaktor; KARYAKINA, M.S., tekhnicheskiy redaktor

[Small bost; construction, handling, use] Shlimpka; ustroistvo,
obrashchenie, ispol'zovanie. Moskora, Izd-vo DOSAAF, 1957. 152 p.
(Bosts and bosting)

(MIRA 10:11)

KARTASHEV, Rostislav Dmitriyevich; IGOSHIN, M.G., red.; KAZANKOV, A.A., red.; KARYAKINA, M.S., tekhn.red.

[Naval manual] Posobie po voenno-morskomu delu. Izd.2., perer. i dop. Moskva, Isd-ve DOSAAF, 1999. 286 p. (MIRA 13:3)


(Naval art and science)


SUR, Pavel Semenovich; KARTASHEV, R.D., red.; LEL'CHELKO, N.I., red.; SHIKIN, S.T., tekhn. red.

[Manual on steeing-gear handling] Posobie po rulevomu delu.

Eoskve, Izd-vo DOSAAF, 1963. 174 p. (MIRA 16:12)

(Ship handling) (Steering gear)

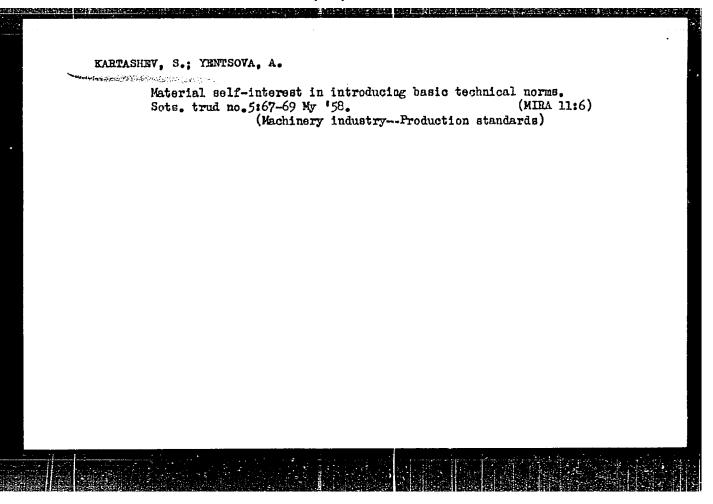

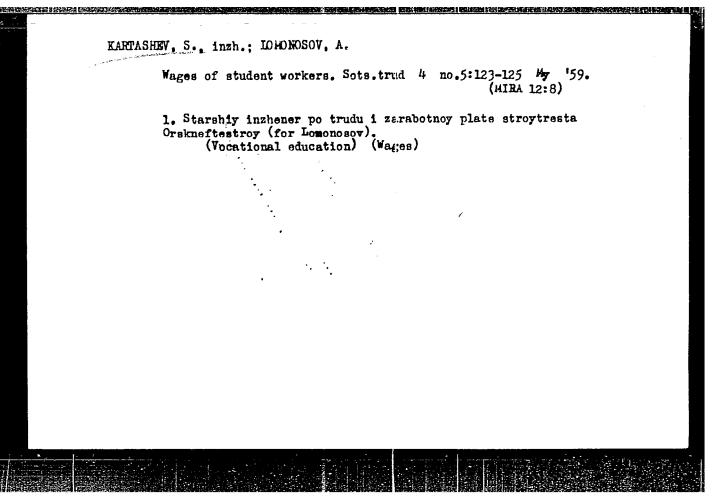

ISAKOV, M.A.; KARTASHEV, S.P.

Manufacturing suiting fabrics from staple fibers. Tekst.prom.
19 no.8:10-14 Ag '59. (MIRA 13:1)

1. Direktor Yegor'yevskogo melanzhevogo kombinata (for Isakov).
2. Glavnyy inzhener Yegor'yevskogo melanzhevogo kombinata (for Kartashev). (Textile fabrics)

KARTASHEV, V.; FOMIN, K.

Good work is acknowledged. Sov.profsoluzy 7 no.24:38-39
D '59. (MIRA 12:12)

1. Rabotniki mekhanicheskogo zavoda, g.Podol'sk, Moskovskoy oblasti.

(Fodol'sk--Trade unions)

MOGILEVSKIY, Dmitriy Aleksandrovich, dotsent; BABKOV, Valeriy Fedorovich, prof., doktor tekhn.nauk; SMIRNOV, Andrey Sergeyevich, kand.tekhn.nauk; ABRAMOV, Leonid Tikhonovich, kand.tekhn.nauk; ZAYTSEV, Filipp Yakovlevich, kand.tekhn.nauk; ZAMAKHAYEV, Mitrofan Semenovich, kand.tekhn.nauk; NIKITIN, Sergey Mikhaylovich, inzh.; BIRULYA, A.K., prof., retsenzent; DUDKIN, P.A., kand.tekhn.nauk, retsenzent; AVDEYEV, V.N., retsenzent; KARTASHEV, V.A., retsenzent; PAL'CHEV, A.G., retsenzent; POPOV, A.N., retsenzent; PTITSIN, I.G., retsenzent; ROMANENKO, I.A., prof., retsenzent; BARATS, I.A., prepodavatel', retsenzent; BASKEVICH, N.I., prepodavatel', retsenzent; BEL'SKIY, A.Ye., prepodavatel', retsenzent; KALUZHSKIY, Ya.A., prepodavatel', retsenzent; chyanov, V.G., red.; MAL'KOVA, N.V., tekhn.red.

[Locating and designing airfields] Izyskaniia i proektirovanie aerodromov. Pod red. V.F.Babkova. Moskva, Nauchno-tekhn.izd-vo M-va avtomobil nogo transporta i shoaseinykh dorog RSFSR, 1959. (MIRA 13:3)

1. Khar'kovskiy avtomobil'no-dorozhnyy institut (for Romanenko, Barats, Baskevich, Bel'skiy, Kaluzhskiy).


(Airports---Planning)

LEPILINA, R.G., kandidat tekhnicheskikh nauk; KARTASHEV, V.G., laureat Stalinskoy premii, inshener

Preparation of glass surfaces for liquid gold compound roasting.

*eg.prom.15 no.8:26-28 Ag '55. (MIRA 8:10)


(Gold--Metallurgy) (Glass blowing and working)

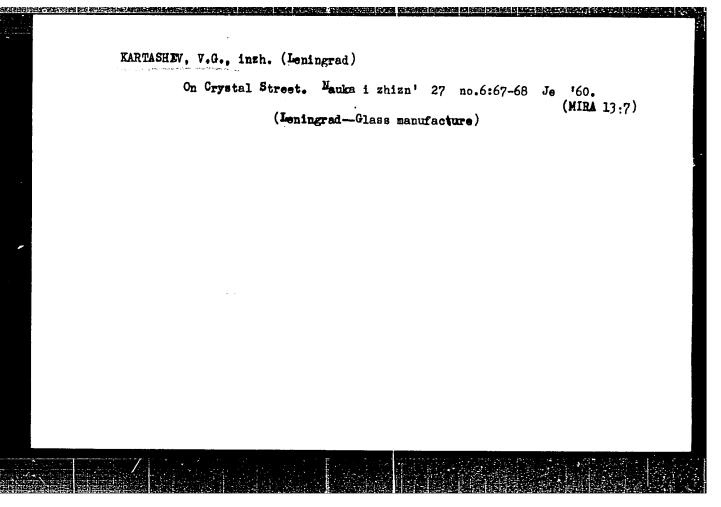

KARTASHEV, V.G.

Propagation of the fundamental wave in a coaxial line with a nonhomogeneous dielectric filling. Radiowakh. i elektron. 10 nc.6:1057-1064 Je '65. (MIRA 18:6)

1. Moskovskiy energeticheskiy institut, kafedra teoreticheskikh osnov radiotekhniki.

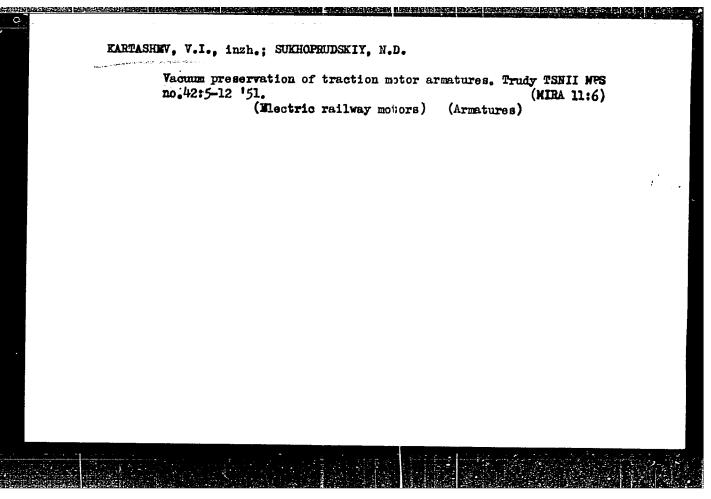

KARTASHEV, V. I. and SUKHOPRUDSKIY, N. D.

"The Impregnation of the Armatures of Traction Motors under Vacuum," The Works of the Scientific-Research Institute of Railroad Transportation (Trudy vsesoyuznogo nauchno-issledovatel'skogo instituta zheleznodorozhnogo transporta), No 42, Transzheldorizdat, 132 pp, 1951.

W-22517, 29 Apr 52